

20" Smooth Polycarbonate

DESCRIPTION


LBS Lighting's smooth spheres are designed for commercial and residential post top and pendant applications and are available with fitter neck and neckless openings.

MATERIALS

- **Polycarbonate** - UV stabilized with continuous operating temperature of 100°C to 125°C and high impact resistance down to -40°C, transmittance of 88% (application dependent). Polycarbonate spheres are available in clear, white or bronze.




FITTER NECK (F)

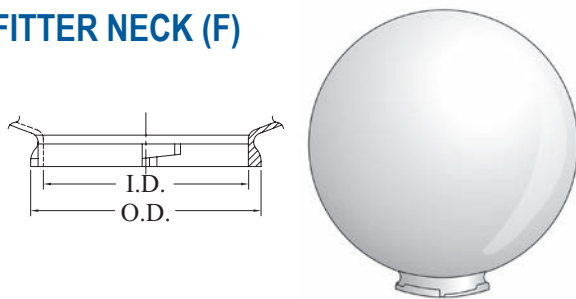


ITEM NO.	DIA (SPHERE)	ID (NECK)	OD (NECK)	MATERIAL	COLOR
10020-CL-6F	20"	5.06"	5.91"	Polycarbonate	Clear
10020-WH-6F	20"	5.06"	5.91"	Polycarbonate	White
10020-BR-6F	20"	5.06"	5.91"	Polycarbonate	Bronze

NECKLESS (N)

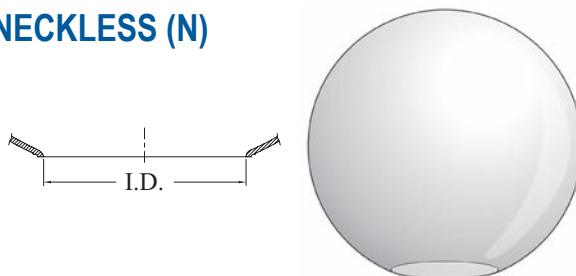

ITEM NO.	DIA (SPHERE)	ID (NECK)	OD (NECK)	MATERIAL	COLOR
10020-CL-5N	20"	5.25"	N/A	Polycarbonate	Clear
10020-WH-5N	20"	5.25"	N/A	Polycarbonate	White
10020-BR-5N	20"	5.25"	N/A	Polycarbonate	Bronze

CUSTOM (XX)

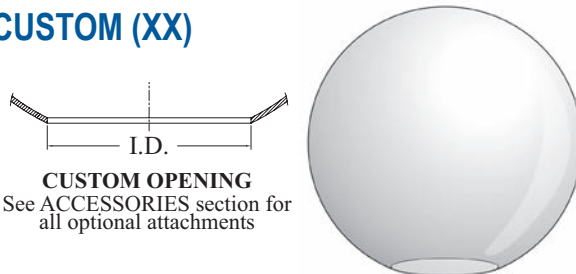

ITEM NO.	DIA (SPHERE)	MIN (OPENING)	MAX (OPENING)	MATERIAL	COLOR
10020-CL-XX	20"	5.25"	13.00"	Polycarbonate	Clear
10020-WH-XX	20"	5.25"	13.00"	Polycarbonate	White
10020-BR-XX	20"	5.25"	13.00"	Polycarbonate	Bronze

OPTIONAL ACCESSORIES

Aluminum Neck Fitters



98007-A
98007.5-A
98009-A
98010-A

Plastic Neck Fitters



98008-P
98008-PSPEC-WHT
98008-PSPEC-BLK

External Heat Shields



96007-BLK
96007-WHT

Internal Heat Shields



96106-A