


# Line Voltage Microwave Bi-level Sensor BRI810-B-M10 instruction


# Line Voltage Microwave Bi-level Sensor BRI810-B-M10 instruction

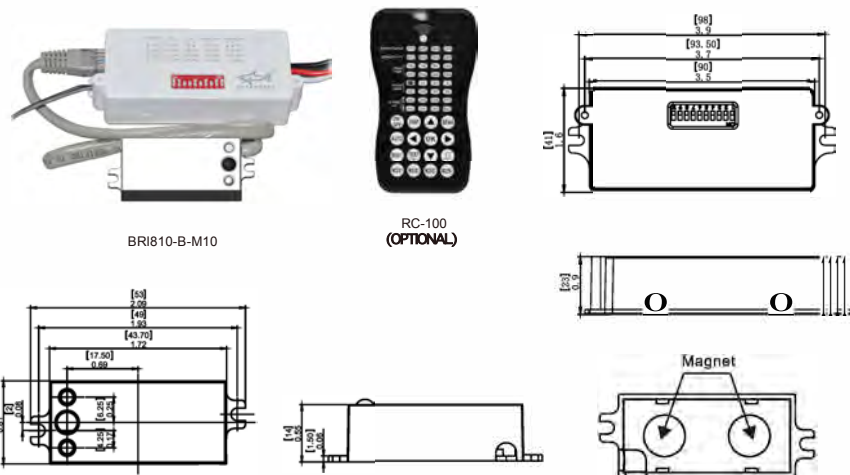


## SPECIFICATIONS

Power supply	120/277VAC 50/60Hz
Maximum load @ -40 °F - +158 °F (-40 °C - +70 °C)	Resistive/Tungsten - 600W@120V Electronic Ballast (LED) - 800VA@120V/1200VA@277V
HF System	5.8GHzCW
Dim control outout	0-10V, max. 25mA sink current
Detection radius/anale	Max 26ft. (8m) /360°
Mounting height	Max 20ft
Humidity	Max. 95% RH
Temperature	-40 °F - +158 °F (-40 °C - +70 °C)

**NOTE:** The high-frequency output of this sensor is <math>< 0.2\text{mW}</math> that is just one 5000<sup>th</sup> of the transmission power of a mobile phone or the output of a microwave oven.



## SENSOR COVERAGE

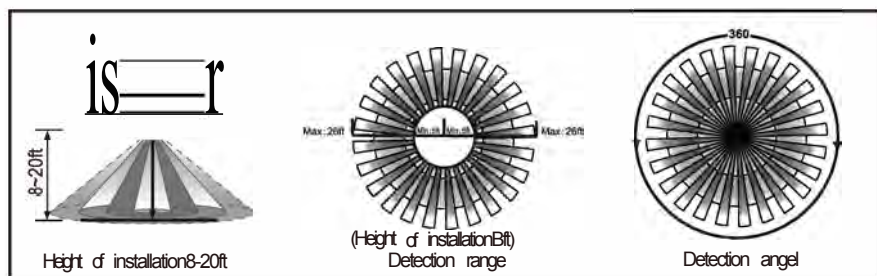

## WARNING

**NOTE:** Warm up time is 15seconds. After the sensor connects input power, the light will keep on 15seconds, then go to dimming to work normally.

**NOTE:** Factory Default Setting: 100% sensitivity, Hold on time: 10seconds, Daylight sensor is 30lux, Dimming level: 30%, Dimming time: 60minutes.

**NOTE:** Any setting changed by DIP Switch or remote control, the light that sensor connect will on/off as confirm.

## UTILIZING FIELD AND INTRODUCTION

BRI810-B-M10 is a moving object sensor that can detect range of 360° and it's working frequency is 5.8GHz. The advantage of this product is stable working state (stable working temperature: -40 °C - +70 °C), BRI810-B-M10 adopts a microwave sensor (high-frequency output <math>< 0.2\text{mW}</math>), so that it is safe and performs better than infrared sensor.

## FUNCTION AND OPTIONS

### Daylight Harvesting Function

A control method based on the control of artificial light with available natural light. The purpose is to control the output of artificial light according to the change of natural light, while ensuring that the illumination of the target space does not change to maintain a certain illumination.

### ON-OFF Function

Switch on the lamp on detection of movement, and switch off after a hold time when there is no motion detected. As built-in daylight sensor can read brightness value, the sensor does not switch on the lamp if with sufficient natural light.



The lamp will not switch on when natural light is sufficient, even there is motion detected.

The lamp switches on automatically with presence when natural light is insufficient.

The lamp turns on at full or dims to maintain the lux level. The lamp output regulates according to the level of natural light available.




The lamp dims to stand-by period after hold-time and stays on selected minimum dimming level.

The lamp switches off completely after the stand-by period.

## PARAMETER SETTING BY DIP SWITCH

Consider the picture: 1, 2 set sensitivity; 3, 4 set hold time; 5, 6 set the lux; 7, 8 stand-by light level; 9, 10 set stand-by time;

# Line Voltage Microwave Bi-level Sensor BRI810-B-M10 instruction



## Detection Range Setting (sensitivity)

Detection range can be reduced by selecting the combination on the DIP switches to fit precisely each application:



SENSITIVITY	
1	2
++	20%
++	50%
++	75%
++	100%

## Hold Time Setting


The lamp can be set to stay ON for any period of time between approx. 10sec and a maximum of 15min. Any movement detected before this time elapse will re-start the timer. It is recommended to select the shortest time for adjusting the detection zone and for performing the walk test. Switch location and hold time of the corresponding table is as follows:



TIME	
3	4
++	10S
++	1Min
++	5Min
++	15Min

## Light-control Setting

The chosen lamp response threshold can be infinitely from approx. 10-50lux, switch location and light-control of the corresponding table is as follows:



LIGHT	
5	6
++	(light sensor disable)
++	10Lux
++	30Lux
++	50Lux

## Stand-by Light Level Setting

The corresponding file of switch location and Stand-by Level as follow:



STAND-BY LEVEL	
7	8
++	0%
++	10%
++	30%
++	50%

## Stand-by Time Setting

File of switch location and stand-by time setting as follow:


# Line Voltage Microwave Bi-level Sensor BRI810-B-M10 instruction



STAND-BY TIME	
9	10
++	+=
++	1Min
++	30Min
++	60Min


## PARAMETER SETTING BY REMOTE CONTROL IN MANUAL OF RC-100.

## INSTALLATION

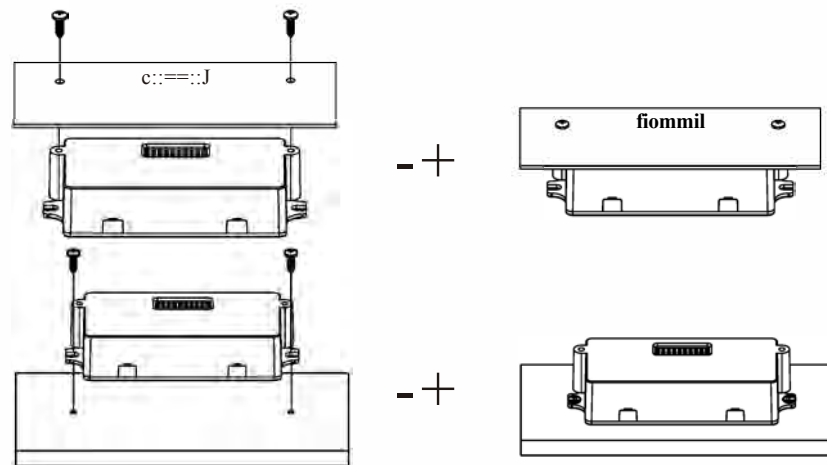

## WIRING DIAGRAMS

Wiring with dimming ballast or LED driver.  
Dimming Driver

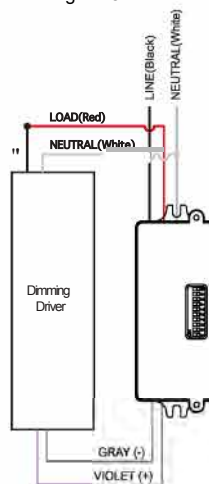

Wiring with non-dimming ballast or LED driver.  
Non-Dimming Driver

