

**ProLED**  
SELECT Round High Bay Light  
Installation Instructions



**Cautions:**

1. Can not use the electric generator to test the LED lamp.
2. Please abide by related country, regional and local law and regulations when install this fixture.
3. Please turn off the power before installation or maintenance.
4. Proper earth grounding is required to ensure safety.

**Notice:**

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.


**Attention:**

1. Please check if there is any damage during shipping. If so, please contact manufacturer timely.
2. Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, then install the fixture according to installation steps.

**Wiring Diagram & Instruction:**

This led highbay light can be equipped with optional DC motion sensor, and is available with 0-10V dimming function, with following 3 dimming solutions:


1. 0-10V dimming,
2. Intelligent dimming with DC motion sensor,
3. Pre-install tool-free handling DC motion sensor dimming module, and choose dimming function freely.

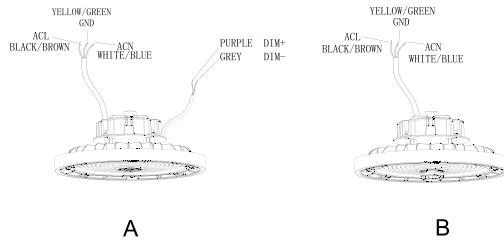

**Installation Methods: Hook Mount, Ceiling Mount, 1/2"NPT Mount. (Please choose the most suitable installation method for the purchased product as per your needs)**

**Hook Mount:**

1. Screw the hook into the fixture, tighten and fix it. (figure 1)
2. Hang the fixture on the ceiling hook or chain. (figure 2)
3. After installation, connect the wire of the fixture to the mains according to local wiring rules, ensure the connection is stable and make good protection on the connection.

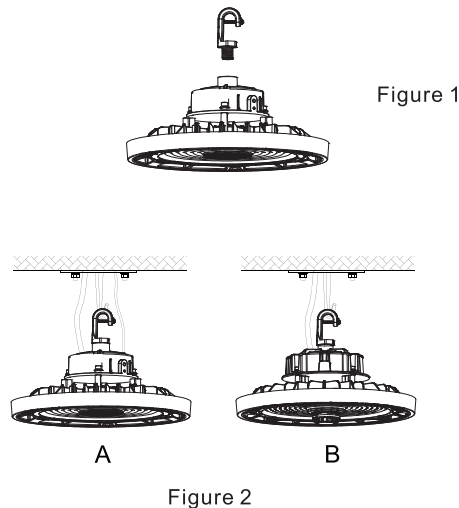


**ProLED**  
SELECT Round High Bay Light  
Installation Instructions




**Ceiling Mount:**

1. Mark with a mark pen or sharp tool on the mounting surface and drill. (figure 3)
2. Fix screws into the holes with a hammer. (figure 4)
3. Align the bracket hole with screw hole (figure 5), and push the fixture to one side (figure 6) and fix it.
4. After installation, connect the wire of the fixture to the mains according to local wiring rules, ensure the connection is stable and make good protection on the connection. By adjusting the brackets screws, users can adjust 50° to the left or right vertically. (figure 7)

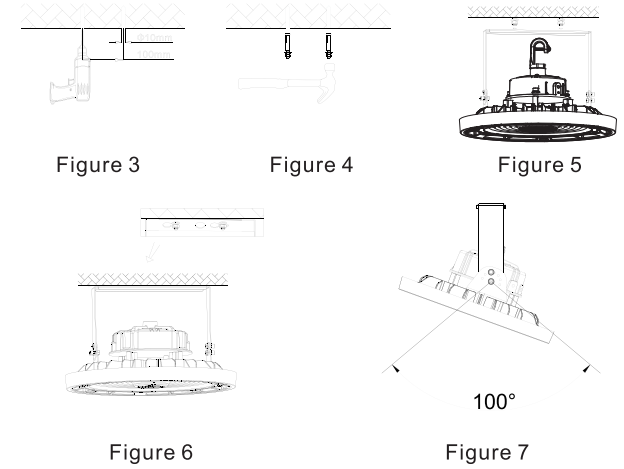


**1/2"NPT Mount**

1. Unscrew the nuts on 1/2" NTP. (figure 8)
2. Insert 1/2" NTP stem into the bracket hole. (figure 9)
3. Re-screw the nuts. (figure 10)
4. After installation, connect the wire of the fixture to the mains according to local wiring rules, ensure the connection is stable and make good protection on the connection.

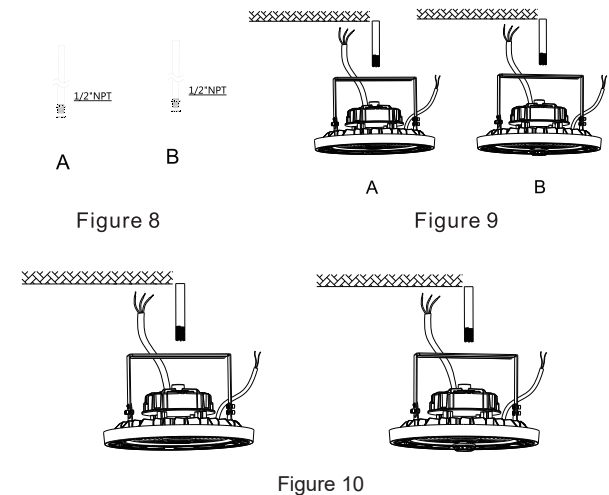


**Installation of DC motion sensor**


Figure11-1. If fixture has sensor receptacle installed, screw the 1/2" knockout out with screw driver by illustrated direction, and screw the sensor kit on. The sensor is set as universal mode(refer to sensor spec sheet), the setting is program mable via remote control(the remote control is not included in standard packing

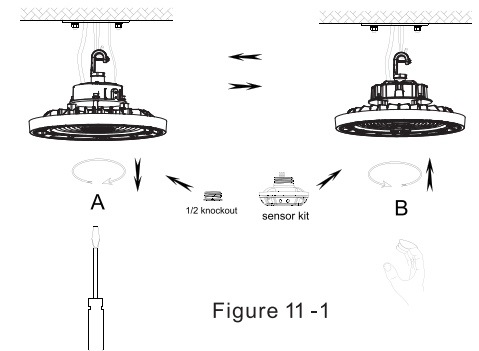

**Safety Rope**

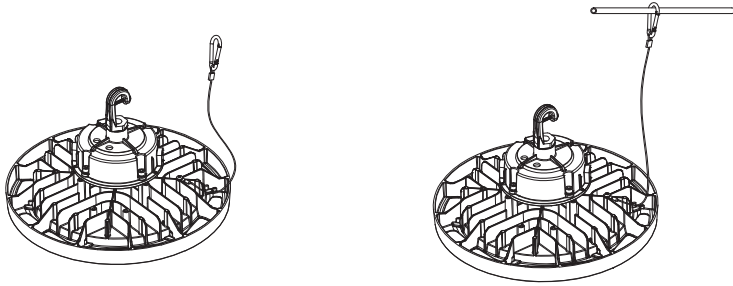

**Junction Box Mount**

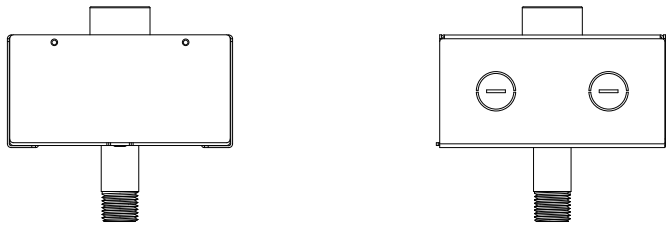

**Optional Function**

The fixture has integrated function of 4000K/5000K selectable and. The setting could be customized.  
Operation: Take away the water-proof gasket, adjust dip switch to choose CCT as per sign. The original setting could be either as factory default or customized request(Figure 11-2).

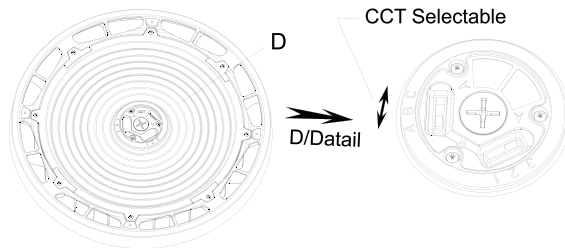


Figure 11-1

**Notes:** If there is a safety rope in the accessory kit, please fix one end of the safety rope to the screw hole on the back of the fixture, after installation finished, fix the other end of the safety rope to the post of mounting end.