COMPOSITE OUTDOOR LIGHTING

- Available in LED, Incandescent
- Fade & Rust Resistant Composite Construction
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 1

AMHERST WALL

339-L

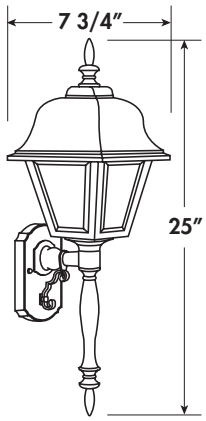

EXTENDS: 9"
HCMT: 15 5/8"

339-S



EXTENDS: 9"
HCMT: 15 5/8"

LED

ASSEMBLED IN USA

c UL us

RoHS compliant

ASK ABOUT ENERGY STAR

EXAMPLE # FA182-LE800C-BWP

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
339-S **339-L**	**EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40˚C TO +40˚C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR** **LE800** - 13W, 80 CRI >88 Lumens Per Watt** **W**-1140lm 3000K **C**-1280lm 4000K	**W**-White **B**-Black	**ACRYLIC** **C**-Clear **W**-White **F**- Glare Free Frost	**P**-Photocell
	INCANDESCENT, MEDIUM BASE, 120V **E26**- 1 X 75W Max	**W**-White **B**-Black	**ACRYLIC** **C**-Clear **W**-White **F**- Glare Free Frost	**P**-Photocell **LED LAMP, 3 YEAR WARRANTY, DIMMABLE, ENERGY STAR** **LWE**-A19/E26, 80CRI, 3000K **LCE**-A19/E26, 80CRI, 4000K
		W-White **B**-Black	**ACRYLIC** **C**-Clear **W**-White **F**- Glare Free Frost	**P**-Photocell **L**-CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE

Specifications subject to change without notice. Printed in U.S.A. ©