


ProLume. High Pressure Sodium Ballast Specifications


BALLAST SPECIFICATIONS				
Input Volts	120V	208V	240V	277V
Frequency	60 Hz			
Circuit Type	CWA			
Input Power	300W			
Starting Current	1.4A	0.8A	0.7A	0.6A
Operating Current	2.5A	1.5A	1.3A	1.1A
Open Circuit Current	2.0A	1.2A	1.0A	0.9A
Recommended Fuse	7.0A	4.0A	4.0A	3.0A
Open Circuit Volts	185V			
Short Circuit Current (Input)	0.5-1.5A	0.3-0.9A	0.3-0.9A	0.2-0.6A
Short Circuit Current (Secondary)	3.0-4.5A			
Insulation System	Class N, 200°C			
UL 1029 Bench Top Rise Code	A	A	A	A
Min. Starting Temp	-40°F / -40°C			

CAPACITOR




Diameter: 2.08"
 Height: 2.75"
 Cap.: 35µF
 Minimum Volts: 240V
 Case Max. Temp.: 90°C

WIRING DIAGRAM

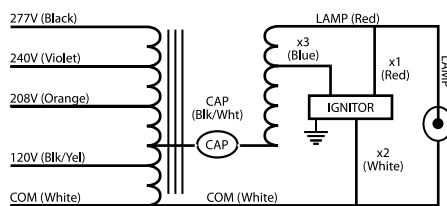


Cap unused leads with wire nuts.

IGNITOR

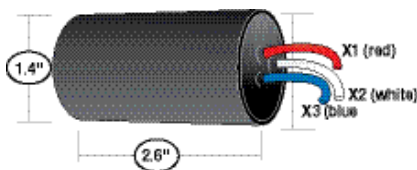

BALLAST DIMENSIONS

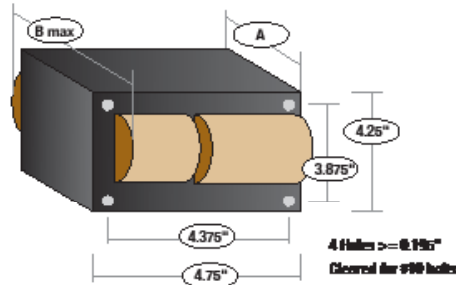

n. (A): 1.85"
 n. (B): 3.5"
 Height: 9.9 lbs
 Lead Length: 12"

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 55120

