


ProLume. Metal Halide Ballast Specifications


BALLAST SPECIFICATIONS					
Input Volts	120V	208V	240V	277V	480V
Frequency	60Hz				
Circuit Type	CWA				
Input Power	289W				
Starting Current	1.5A	0.9A	0.7A	0.6A	0.4A
Operating Current	2.50A	1.45A	1.25A	1.5A	0.65A
Open Circuit Current	2.9A	1.7A	1.6A	1.2A	0.8A
Recommended Fuse	10A	6A	5A	5A	3A
Open Circuit Volts	307V				
Short Circuit Current (Input)	0.9-2.7A	0.5-1.5A	0.4-1.2A	0.4-1.2A	0.2-0.6A
Short Circuit Current (Secondary)	2.1-3.5A				
Insulation System	Class H, 180°C				
UL 1029 Bench Top Rise Code	A	A	A	A	A
Min. Starting Temp	-22°F / -30°C				

CAPACITOR




Diameter: 1.88"
Height: 2.75"
Cap.: 15µF
Minimum Volts: 400V
Case Max. Temp.: 90°C

WIRING DIAGRAM



BALLAST DIMENSIONS

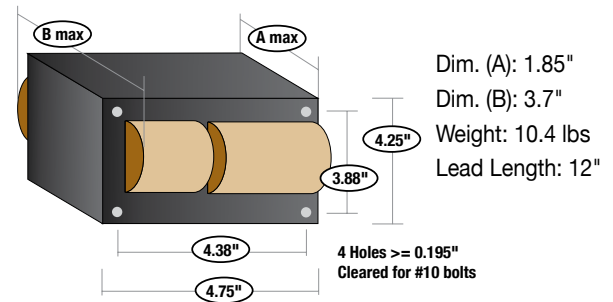

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 55146

