


ProLume ProFormance

Electronic Linear Fluorescent Ballast Specifications


Ballast Type: Electronic Fluorescent
 Starting Method: Rapid Start
 Lamp Connection: Series
 Input Voltage: 120V
 Input Frequency: 50/60Hz

| Lamp Type | # of Lamps | Volts | Rated Lamp Watts | Min. Start Temp (°F/°C) | Input Current (Amps) | Input Power (Watts) | Ballast Factor | THD % | Power Factor | B. E. F. | Wire Diag. |
|--------------|------------|-------|------------------|-------------------------|----------------------|---------------------|----------------|-------|--------------|----------|------------|
| F96T12/HO | 2 | 120 | 110 | -20/-30 | 1.65 | 196 | 0.90 | <10 | 0.99 | 0.46 | 2-1 |
| F96T12/HO | 1 | 120 | 110 | -20/-30 | 0.88 | 104 | 0.92 | <10 | 0.99 | 0.88 | 1-7 |
| F96T12/HO/ES | 2 | 120 | 95 | 60/16 | 1.38 | 164 | 0.90 | <10 | 0.99 | 0.55 | 2-1 |
| F72T12/HO | 2 | 120 | 85 | -20/-30 | 1.30 | 154 | 0.90 | <10 | 0.99 | 0.58 | 2-1 |
| F60T12/HO | 2 | 120 | 75 | -20/-30 | 1.10 | 132 | 0.90 | <10 | 0.99 | 0.68 | 2-1 |
| F48T12/HO | 2 | 120 | 60 | -20/-30 | 0.88 | 104 | 0.90 | <10 | 0.99 | 0.87 | 2-1 |

WIRING DIAGRAMS

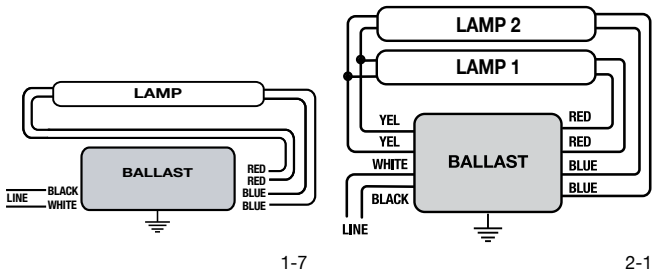

CASE DIAGRAM

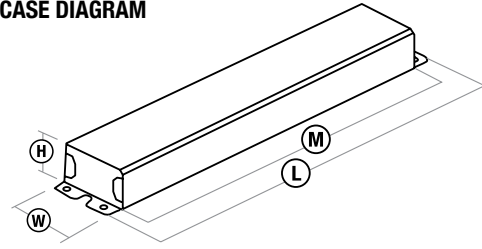


STANDARD LEAD LENGTH

| | in. | cm. |
|--------|-----|--------|
| Black | 22 | 60.96 |
| White | 22 | 60.96 |
| Blue | 46 | 114.84 |
| Red | 46 | 114.84 |
| Yellow | 72 | 177.80 |

CASE DIMENSIONS

| Overall (L) | Width (W) | Height (H) | Mounting (M) |
|-------------|-----------|------------|--------------|
| 11.80" | 2.15" | 1.61" | 11.00" |

HOT SPOT LOCATION



OCV: 750V

Maximum Case Temperature: 167°F

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50162

