


ProLume ProFormance

Electronic Linear Fluorescent Ballast Specifications

Ballast Type: Electronic Fluorescent
 Starting Method: Rapid Start
 Lamp Connection: Series
 Input Voltage: 120-277V
 Input Frequency: 50/60Hz

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
F96T12/HO	2	120	110	-20/-30	1.65	196	0.85	<10	0.99	0.43	2-1
		277			0.71				0.98		
F96T12/HO	1	120	110	-20/-30	0.88	104	0.92	<15	0.95	0.88	1-7
		277			0.38				0.94		
F96T12/HO/ES	2	120	95	60/16	1.38	164	0.90	<10	0.98	0.55	2-1
		277			0.60				0.97		
F72T12/HO	2	120	85	-20/-30	1.30	154	0.90	<10	0.99	0.58	2-1
		277			0.56				0.97		
F60T12/HO	2	120	75	-20/-30	1.10	132	0.90	<10	0.97	0.68	2-1
		277			0.47				0.96		
F48T12/HO	2	120	60	-20/-30	0.88	104	0.90	<10	0.96	0.87	2-1
		277			0.38						

WIRING DIAGRAMS

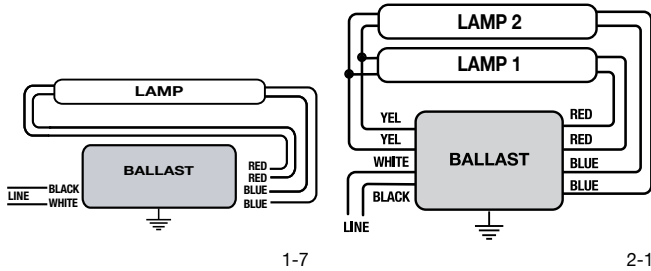


STANDARD LEAD LENGTH

	in.	cm.
Black	22	60.96
White	22	60.96
Blue	46	114.84
Red	46	114.84
Yellow	72	177.80

OCV: 750V


CASE DIAGRAM

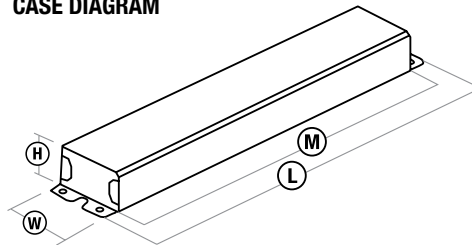

CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
11.80"	2.15"	1.61"	11.00"

HOT SPOT LOCATION



Maximum Case Temperature: 167°F

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50164

