

## BAEM25-170BC/347-C


Order Code	7337
Input Voltage	120~347 Vac
Frequency	50/60 Hz
Input Current	200mA Max
Weight	2.67 lbs
Dimension	314x58x38mm (12.36x2.28x1.5in) + 330mm(13in) conduit



### Electrical Characteristics

Output Voltage	170 Vdc
Output Current	147mA
Output Power	25W Max
Charge Current	200mA
Charging Time	≥ 24 Hours Minimum
Discharging Time	90 Minutes Minimum
Operation Environment Temperature	32F ~122F
Battery Life	500 cycles
Primary Application	Indoor, Commercial, Residential
Certifications	UL 924, CEC (BC Mark)

### Wiring Diagram

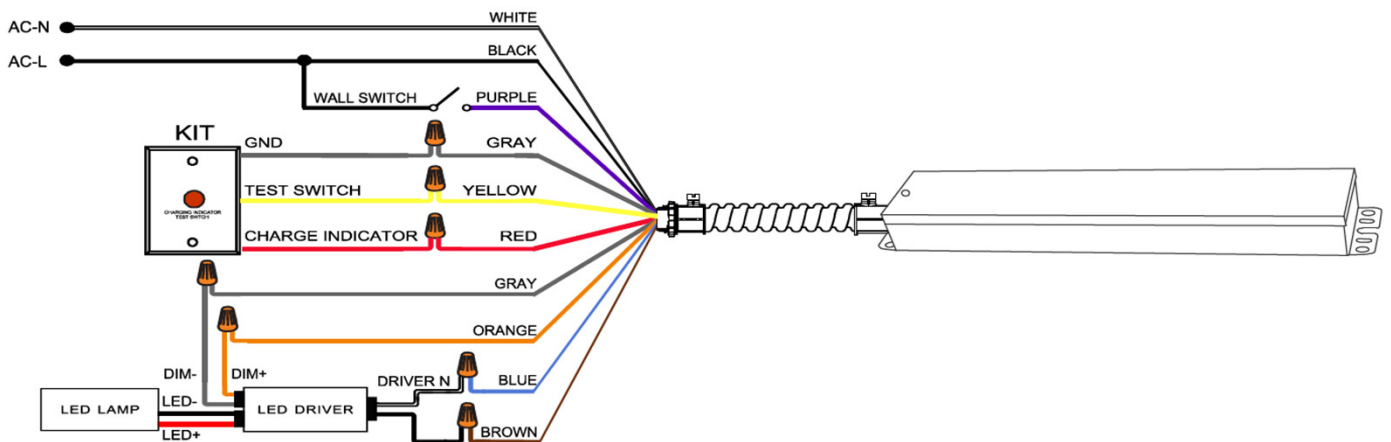

**Cautions & Warnings:** Contains Lithium. Rechargeable Battery. Must be recycled or disposed properly.

**Warning:** To prevent high voltage from being present on LED (-) lead proper to installation, battery pack must be disconnect. Do not connect battery pack until installation is complete and AC power is supplied to the emergency driver.