


ProLume. Pulse Start Metal Halide Ballast Specifications


| BALLAST SPECIFICATIONS | | | | |
|-----------------------------------|----------------|----------|----------|----------|
| Input Volts | 120V | 208V | 240V | 277V |
| Frequency | 60Hz | | | |
| Circuit Type | CWA | | | |
| Input Power | 460W | | | |
| Starting Current | 3.1A | 1.7A | 1.5A | 1.3A |
| Operating Current | 4.0A | 2.3A | 2.0A | 1.75A |
| Open Circuit Current | 1.8A | 1.1A | 0.9A | 0.8A |
| Recommended Fuse | 12A | 6A | 6A | 5A |
| Open Circuit Volts | 282V | | | |
| Short Circuit Current (Input) | 1.5-4.5A | 0.8-2.4A | 0.7-2.1A | 0.6-1.8A |
| Short Circuit Current (Secondary) | 3.2-5.0A | | | |
| Insulation System | Class H, 180°C | | | |
| UL 1029 Bench Top Rise Code | B | C | D | D |
| Min. Starting Temp | -22°F / -30°C | | | |

CAPACITOR




Diameter: 1.88"
Height: 3.54"
Cap.: 26µF
Minimum Volts: 400V
Case Max. Temp.: 90°C


WIRING DIAGRAM

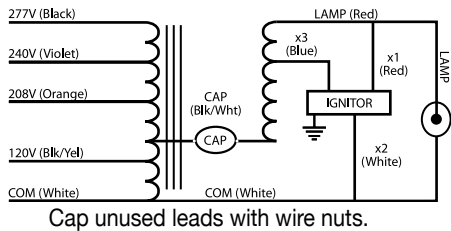

IGNITOR

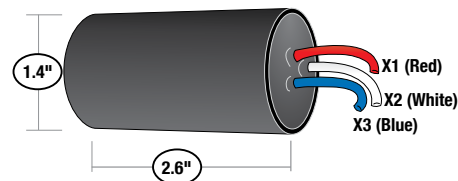


SOCKETS



| Product Number | Product Code | Terminal | Lead Length |
|----------------|--------------|----------|-------------|
| 91010 | SKT/E39/4KV | Screw | 10" |
| 91011 | SKT/E26/4KV | Screw | 18" |

BALLAST DIMENSIONS

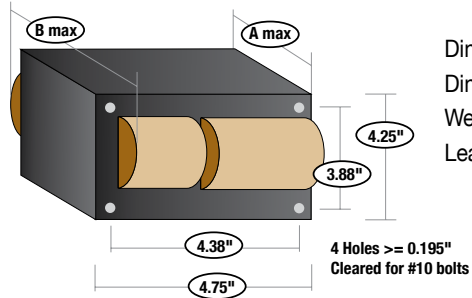

Dim. (A): 2.32"
Dim. (B): 4.30"
Weight: 11.2 lbs
Lead Length: 12"

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 55162

