


sunlite®

INSTALLATION INSTRUCTIONS

LED RECESSED DEEP DOWNLIGHT | 85564-SU, 85565-SU

DIMMABLE*



Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNINGS & CAUTIONS: Risk of fire or electric shock. Turn power off before inspection, installation, or removal. Use only on 120 volt circuits. Before installation, thoroughly review enclosed installation manual. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. If you do not have sufficient electrical wiring experience, please consult a qualified electrician. All work should be done by a qualified electrician. Do not make or alter any open holes in an enclosure of wiring or electrical components during installation. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Not for emergency lighting. Type IC - Inherently Protected. Operating temperature -20°C – 40°C (-4°F – 104°F). Suitable for damp locations.

AVERTISSEMENT – Risque d'incendie ou de choc électrique. Ce produit doit être installé selon le code d'installation pertinent, par une personne qui connaît bien le produit et son fonctionnement ainsi que les risques inhérents. Convient aux emplacements mouillés. Peut être utilisé à une température ambiante n'excédant pas 40°C. Type IC - Protection Inhérente. Cet appareil n'est pas destiné à être utilisé dans les issues de secours.





Retain these instructions for future reference.

PRE-INSTALLATION:



1. Turn power OFF from the electrical panel before starting installation.
2. Locate a suitable position to install the fixture and open in accordance to the cut-hole dimensions (refer to Hole Cut Table for appropriate size) (Fig. 1)

Installation



1. Open the junction box cover and remove the appropriate knockout(s) on the side panel. (Fig. 2)
2. Insert the electrical supply cable through the knockout and secure with a cable connector (sold separately).
3. Using quick-connect push-in terminals, connect the ground wire to green wire terminal; black wire to black wire terminal; white wire to white wire terminal. (Fig. 2)
4. Place all wiring and connections back into the box. *Select desired CCT prior to closing the cover.* Connect the driver to the light panel.
5. Insert junction box through the mounting hole. (Fig. 3)
6. Push spring loaded clips on the fixture upwards and insert fixture base into the mounting hole. Release the clips and fixture will be pulled flush to the ceiling. (Fig. 4)
7. Once assembly is complete, turn power on to confirm fixture is working properly.



Fixture Dimensions



85564-SU

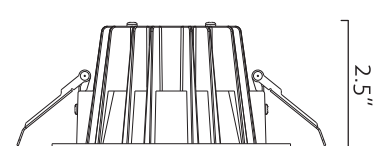

85565-SU