



LED RED EXIT BATTERY BACKUP

SUGGESTED APPLICATIONS

- Emergency lighting for office, industrial, retail and other public spaces

FEATURES

- 120/277V dual voltage operation
- Red EXIT letters - 6" height and 3/4" stroke
- High-impact, 5VA flame retardant thermoplastic ABS housing
- Ceiling, wall, or side mounting capability (canopy included)
- Test switch and AC supply indicator
- Removeable knockout chevron directional arrows
- Battery backup with accessible test button for 90 minutes of illumination during a power outage
- Suitable for damp locations
- Meets NFPA 70, NFPA 101, UL924, NEC and OSHA standards



**INPUT VOLTAGE: 120/277V
(DUAL VOLTAGE)**

FREQUENCY: 50/60 Hz

DIMMABILITY: NO

AVG. RATED LIFE: 500 USES

DAMP LOCATION

**CONSTRUCTION:
THERMOPLASTIC**

RECHARGE TIME: 24 HRS

RUNTIME: >= 90 MINUTES

UNIT WEIGHT: 2.2 LBS

**BATTERY BACKUP:
NI-CAD 2.4V 300mA**

**AMBIENT OPERATING
TEMPERATURE: 50°F TO 104°F**

**ENERGY USED IN
MAINTENANCE MODE: 2.5W**




**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting
Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies.
All sizes and specifications are subject to change without notice.



LED RED EXIT BATTERY BACKUP

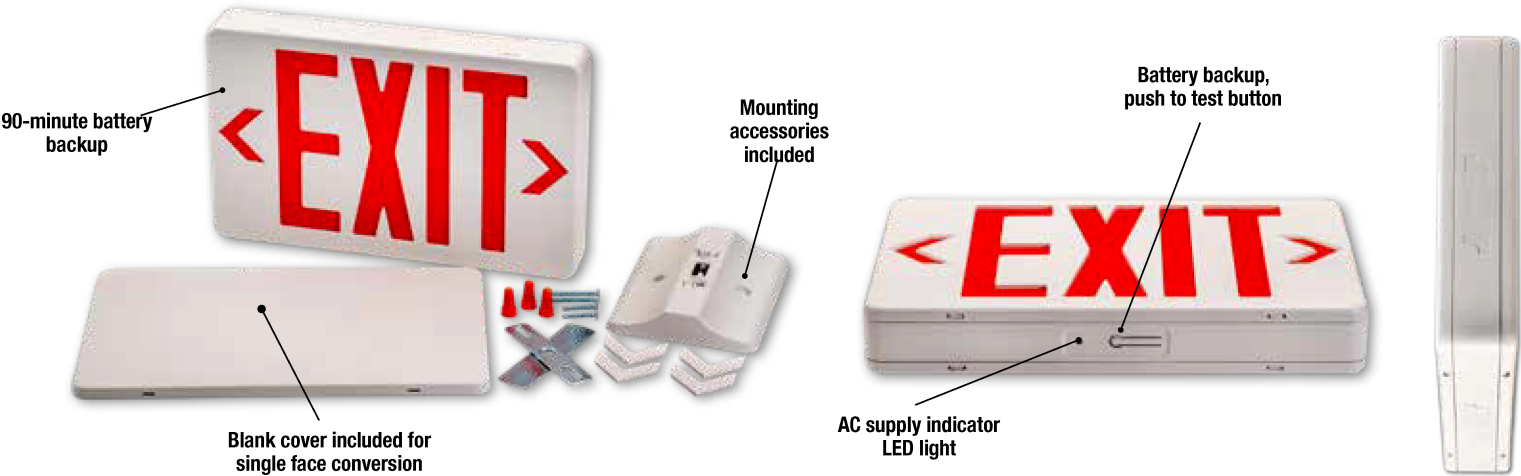

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	MOUNTING	DIMENSIONS	PK-QTY
ES/LED/RW/B	75119	751338033481	WALL, SIDE OR CEILING	11.8" X 1.8" X 7.3"	12-PK

NOMENCLATURE

Example: ES/LED/RW/B

ES	LED	RW	B
EXIT SIGN	LED	RED LETTERS, WHITE HOUSING	BATTERY BACKUP

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**