The Lighting – Super Store
unbeatable prices
unparalled selection
wholesale warehouse club - no membership fees
LightBulbSurplus
Light More, Pay Less



LED UFO High Bay

A unique feature for this fixture is the quick disconnected cable, it can quickly seperate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.












Product Features


1. DLC 5.1 Premium with high luminous efficiency and low UGR;
2. Simple and stylish appearance;
3. Excellent heating dissipation;
3. Branded driver and LED's;
4. Microwave Sensor, PIR Motion sensor, Motion Sensor with Bluetooth ;
5. Very complete accessories for option.

Product Dimension

1. Rings type:




150/100/100W




240/200/200W

2. Hook type:



150/100/100W



240/200/200W

Jen Lighting


Product Parameters

Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life span	Lamp shell
JEN-UFO-150/100/100W-H-TP(50)	150W/100W /100W	AC 100-277V	5000K	2835 LUMILEDS	80°	140lm/W	Ra>80	-40°F~113°F -40°C~45°C	-40°F~158°F -40°C~70°C	Wet Location	≥50000H	Black & White
JEN-UFO-240/200/200W-H-TP(50)	240W/200W /200W											


Installtion Instruction

1. Rings type:


1.Lock the ring.



2.Tighten the screw.
(This step can be omitted if there is no screw hole.)




3.Hang up the light.




2. Hook type:


1.Lock the hook.




2.Tighten the screw.
(This step can be omitted if there is no screw hole.)



3.Hang up the light.




4.Lock the screw.




3.Adjust power and color temperature installation

1.Find out the rubber on the driver, as shown in Figure 1.




2.Remove the Rubber stopper, as shown in Figure 2.




Installtion Instruction

3.Flip the color temperature switch to the desired color temperature, flip the power switch to the desired wattage, as shown in Figure 3.




4.Restore the installation in the order of Step 321, as shown in Figure 4.

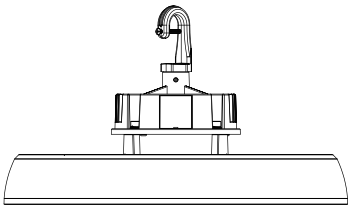


4.Sensor installation


1.Unscrew the plug screws using screws, as shown in Figure 1.




2.Remove the plug screw, as shown in Figure 2.



3.Screw the sensor into the base, as shown in Figure 3.



4.Sensor installation, as shown in Figure 4.



Packing Information


Power	Outer box (L*W*H)	Oty/Ctn (pcs)	N.W./Ctn (kg/lbs)	G.W./Ctn (kg/lbs)	Remarks
150/100/100W	12.99"x12.99"x7.05" (330x330x179mm)	1	2.36/5.20	2.85/6.28	2M cable
240/200/200W	15.35"x15.35"x7.40" (390x390x188mm)	1	3.47/7.65	4.29/9.46	

Wiring Connection


Turn off the power,connect AC wire.black wire to L,white wire to N,and green wire to PE.

Dimmer connection(with dimmable driver.)

1. Compatible with 0-10V dimming.
2. Connect wires as below,purple wire is D+,pink wire is D-,cap pink wire.

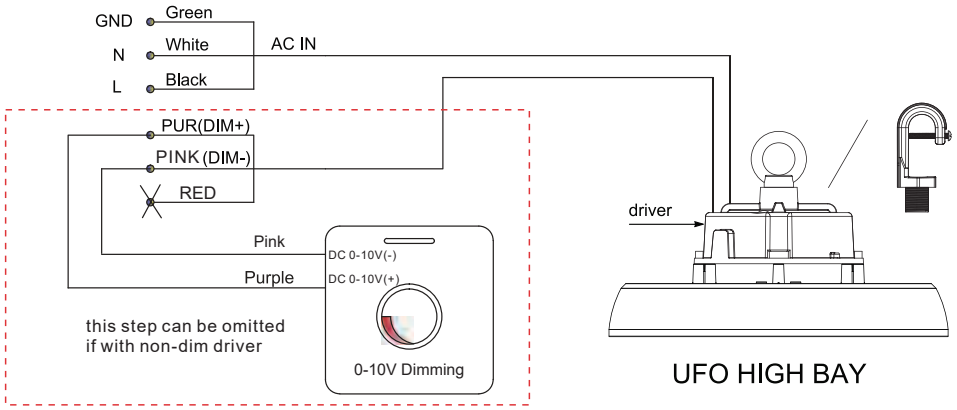

Applications

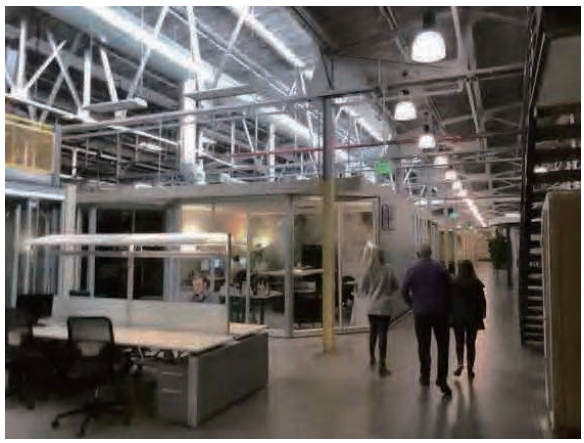



Note

1. Please let professionals install the lamp;
2. Please cut off the power supply if any abnormal situation;
3. Please clean the glass of high bay light regularly, to keep great lighting transmission;
4. Please clean the high bay light shell termly, to keep good heat dissipation;
5. Please use the dry cloth to clean it only, not by water or caustic solution;
6. Lamp earthing is necessary;
7. High voltage inside, please don't remove it in case of electric shock;
8. Glass accessory included, please take care of it when using and storage, avoid high pressure on it;