
UFO LED Highbay (201-09)

Wattages: 150/100/80W, 200/150/100W, 240/200/150W Tunable



Engineered for demanding commercial environments, this Commercial-Grade UFO High Bay delivers maximum versatility with wattage-tunable options (150/100/80W, 200/150/100W, 240/200/150W) and color-tunable performance (3500K/4000K/5000K) to match any application. A standout feature of this fixture is its **quick-disconnect cable**, allowing the LED module and driver to separate in seconds for effortless maintenance.

Built with a robust die-cast aluminum hook, integrated heat-sink design, and DLC 5.1 Premium efficiency, it offers powerful illumination with low glare and long-term reliability. Enhanced with a range of smart controls—including microwave, PIR, and Bluetooth motion sensors—plus 0–10V dimming and multiple accessory options, this high bay is designed to streamline installation, cut energy costs, and perform flawlessly in warehouses, manufacturing spaces, and large commercial facilities.



Features:

- DLC 5.1 Premium with high luminous efficiency and low UGR.
- Simple and stylish appearance.
- Excellent heating dissipation.
- Branded driver and LED's.
- Microwave Sensor, PIR Motion sensor, Motion Sensor with Bluetooth.
- Very complete accessories for option.
- 0-10 diming.

Product Parameters:

SPECIFICATION			
MODEL	201-09-150W	201-09-200W	201-09-240W
WATTAGE	150/100/80W Tunable	200/150/100W Tunable	240/200/150W Tunable
LUMEN	22500/15000/12000	30000/22500/15000	36000/30000/22500
EFFICACY	150LPW		
CCT	3500K/4000K/5000K Tunable		
CRI	70/80		
INPUT VOLTAGE	AC120-277V		
LIGHTING ANGLE	90°		
OPERATING TEMPERATURE	-40℉~113℉		
STORAGE TEMPERATURE	-40℉~158℉		
PF	＞0.9		
DRIVER EFFICIENCY	＞90%		
PROTECTION LEVEL	WET		
LIFE TIME	＞50000 hours		
WARRANTY	5 year limited		


UFO LED Highbay (201-09)

Wattages: 150/100/80W, 200/150/100W, 240/200/150W Tunable


Product Dimension

- **Hook type(Standard):**


150/120/100W



200/150/100W



240/200/150W



	Packing	Size	Net Weight	Gross Weight	pcs/ctn
150/100/80W	Outer Packing Size	L10.59 * W10.59 * H5.63 inch L269 * W269 * H143 mm	3.47Lbs(1.575Kg)	4.41Lbs(2Kg)	1pcs/ctn
200/150/100W	Outer Packing Size	L11.38 * W11.38 * H6.38 inch L289 * W289 * H162 mm	4.78Lbs(2.17Kg)	5.88Lbs(2.67Kg)	1pcs/ctn
240/200/150W	Outer Packing Size	L11.38 * W11.38 * H6.38 inch L289 * W289 *H162 mm	4.78Lbs(2.17Kg)	5.88Lbs(2.67Kg)	1pcs/ctn



Easy, screw-in sensors for all your needs.





Mounting Brackets:



Rings (Standard)



HOOK (SOLD SEPARATELY)




YOKE (SOLD SEPARATELY)

UFO LED Highbay (201-09)

Wattages: 150/100/80W, 200/150/100W, 240/200/150W Tunable

ACCESSORIES (SOLD SEPARATELY):


Wire Guard



90° Aluminum Reflector


90° PC Reflector


bottom cover for PC reflector

Emergency Driver


Safety Rope


Hanging Chains


Remote Controller


Microwave sensor


PIR Sensor

ORDERING GUIDE:




EXAMPLE:

201-09-150W-3CCT-[A,B,C,D,blank]





201-09	150W		3CCT	Y
PRODUCT	POWER	INPUT VOLTAGE	CCT	CONTROL
201-09	150=150/100/80W 200=200/150/100W 240=240/200/150W	Blank=120-277Vac	3CCT = adjust color temperature and wattage.	A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) C: BRT sensor (occupancy+bluetooth) D: PHB sensor (Infrared bluetooth) Balnk: no provide sensor

Installtion Instruction:

1.Rings type:

1.Lock the ring.	2.Tighten the screw. (This step can be omitted if there is no screw hole.)	3.Hang up the light.
		

2.Hook type:


1.Lock the hook.	2.Tighten the screw. (This step can be omitted if there is no screw hole.)	3.Hang up the light.	4.Lock the screw.
			

UFO LED Highbay (201-09)


Wattages: 150/100/80W, 200/150/100W, 240/200/150W Tunable

3.YOKE type:


1.Bracket fixing holes are marked on the wall, then drilling two holes on the wall by power drill, as shown in Figure1.



2.Tap two expansion bolts into the holes, as shown in Figure2.

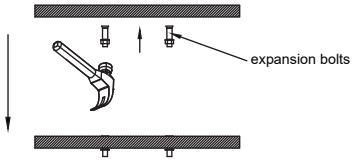


3.Put the fixture on the expansion bolt, then use a wrench to tighten the screw. as shown in Figure3.

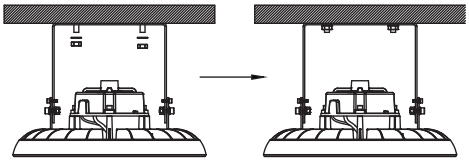


4.Sensor installation:


1.Unscrew the plug screws using screws, as shown in Figure 1.




2.Remove the plug screw, as shown in Figure 2.



3.Screw the sensor into the base, as shown in Figure 3.




4.Sensor installation, as shown in Figure 4.



Wiring Connection:


Turn off the power,connect AC wire.Black wire to L,white wire to N,and green wire to PE.
Dimmer connection(with dimmable driver.)
1. Compatible with 0-10V dimming.
2. Connect wires as below, Pink 0-10V Dimming purple wire is D+,pink wire is D-,cap red wire.

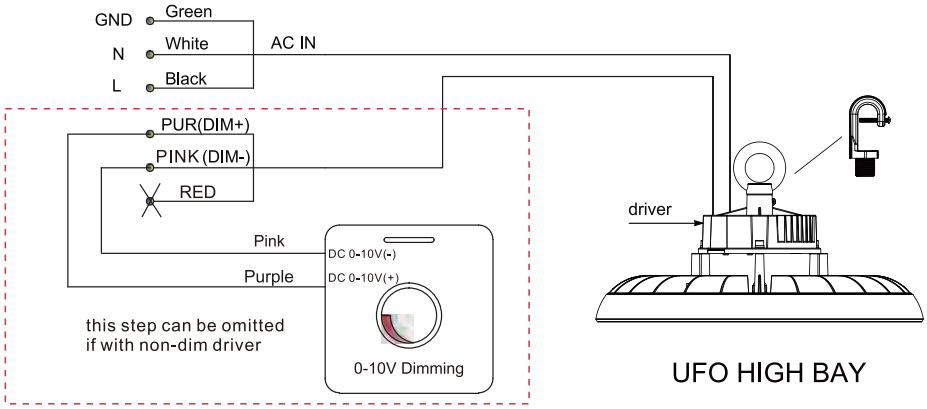



DISTRIBUTION


For complete IES files, please visit our website.

201-09-150W-H-TCP-[A,B,C,D,blank](150W-5000K)

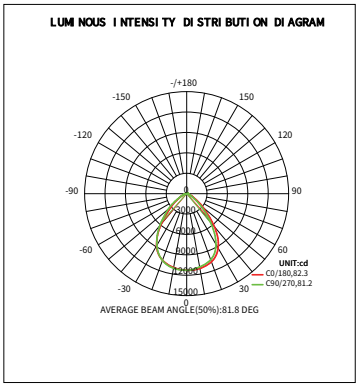

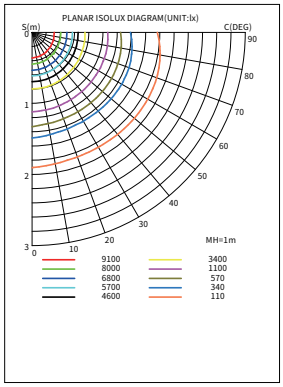

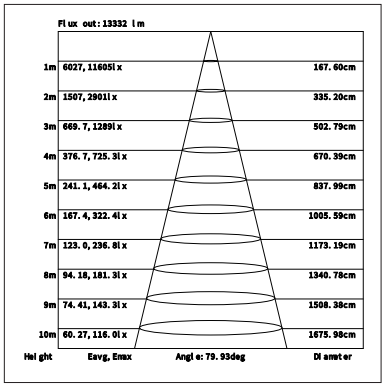


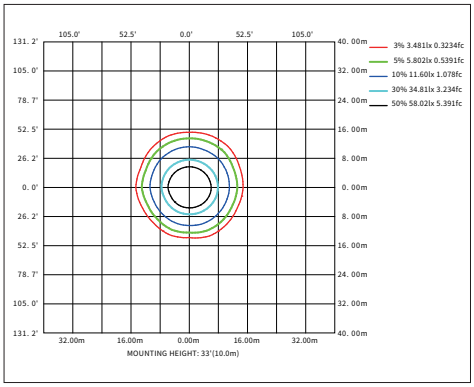



UFO LED Highbay (201-09)


Wattages: 150/100/80W, 200/150/100W, 240/200/150W Tunable

201-09-200W-H-TCP-[A,B,C,D,blank](200W-5000K)

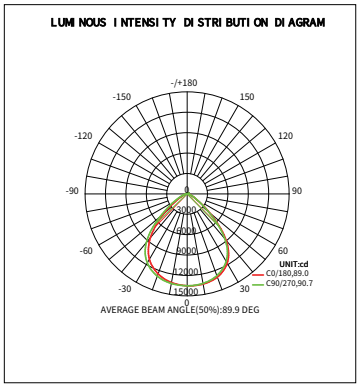

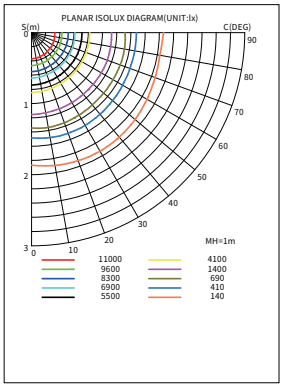

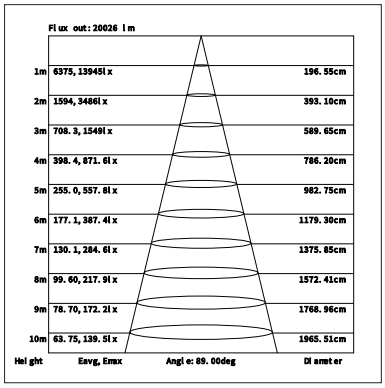

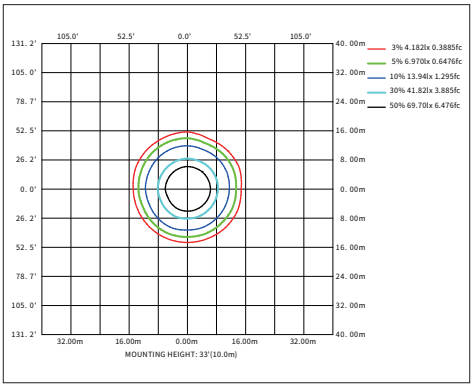

201-09--240W-H-TCP-[A,B,C,D,blank](240W-5000K)

