

INSTALLATION GUIDE - RECESSED MOUNT KIT

REV. 1.0 - 2026-11-06

Recessed mount

Notice: Always turn off the power supply from main circuit breaker before installing or maintaining fixture.

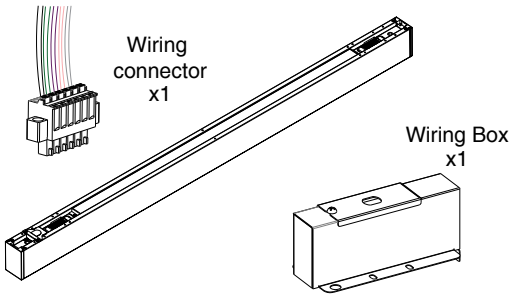

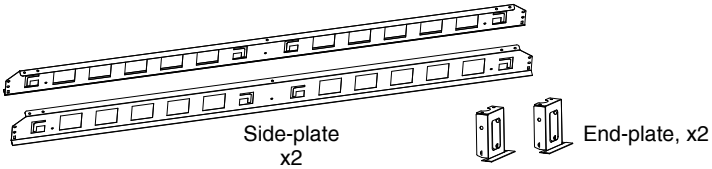

Stainless steel spring clips




x4(8*)

Screw C: M4*6*8mm,
x1(2ft), x3(4ft), x5(8ft)


Screw D: M4*10*10mm, x8(16*)

*for 8FT fixture Accessory for single luminaire.


1. Remove original wiring cover Plate A and B.

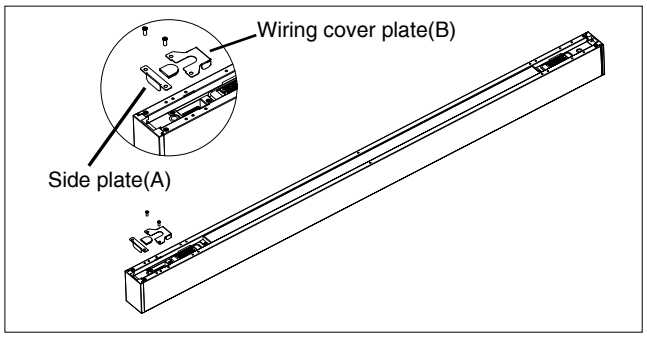


2.Remove the 2 screws on fixture back, attach Side-plates and end-plates to fixture.

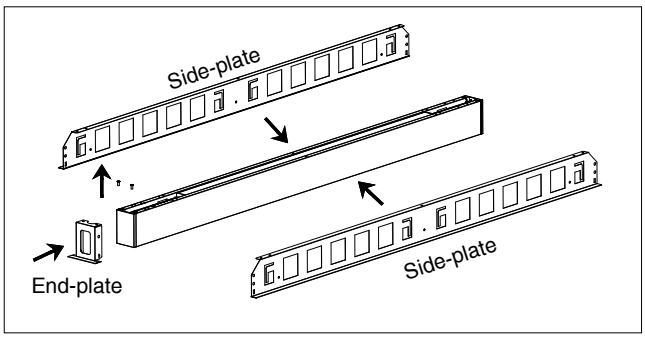


3. Use Screw C to secure the side plates(should be executed on 4ft/8ft fixtures). Secure wiring connector to fixture by 2 screws as shown.

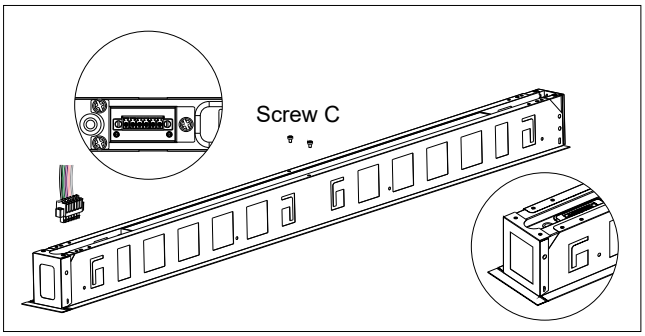


4.Attach spring clips and wiring box to side plates. Use Screw D to secure side plates, wiring box and all clips. Use screws removed in Fig. 27 to lock the end-plates.

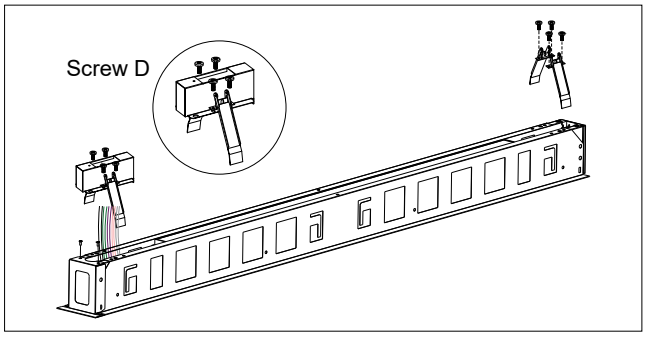

5. Secure the Pipe to the access plate removed from the wiring box and make wiring.

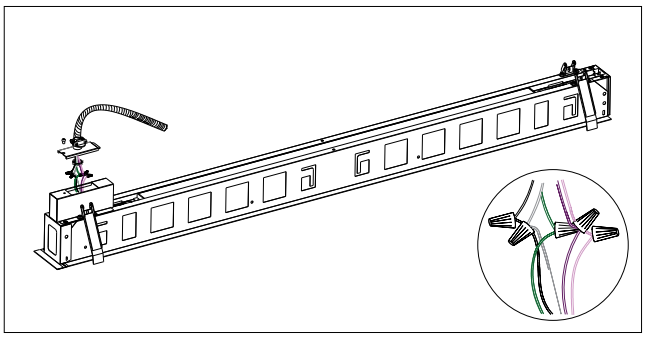

6. Attach the access plate and Pipe to the wiring box.

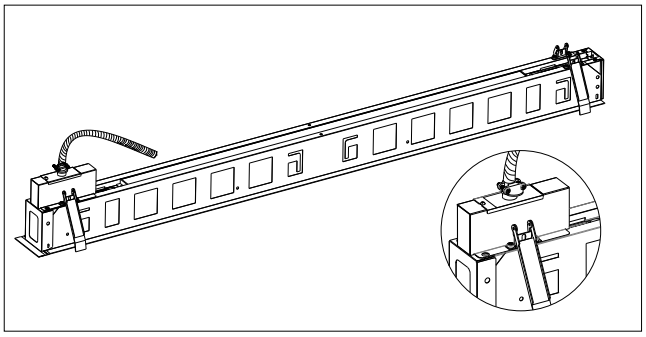


TX HEADQUARTERS
2010 Commerce Dr sales@lightbulbsurplus.com
+1 (469) 857-5693


CA WAREHOUSE
42636 Avenida Alvarado, Temecula, CA 92590
+1 (469) 226-2345

CONTACT


5. Remove the 2 screws from the tail end cap of fixture C, then install the side plates and end plates onto fixtures B and C. Following the diagram, remove the screws securing the end-cap lens and the power cord cover. Align fixture B with fixture A, then align fixture C with fixture B; press to interlock the three fixtures into a straight line. After the fixtures are interlocked, reinstall the lens and power cord cover screws.

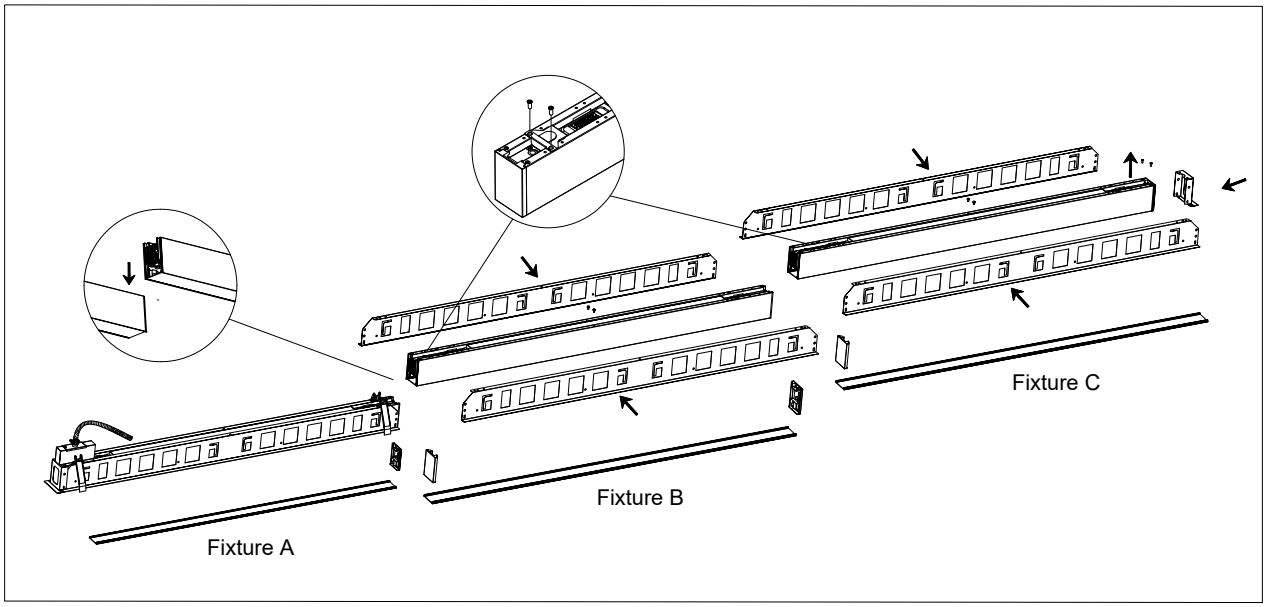

7. Align fixture to pre-cut hole, lift the spring clips and insert fixture to the ceiling.

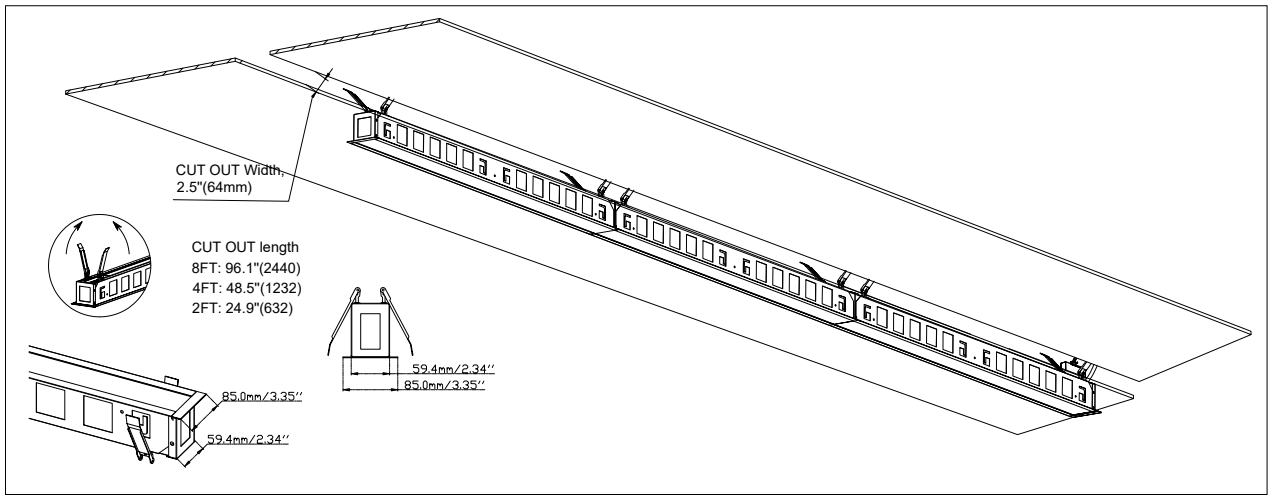


8. Clean up fingerprints and stains. The installation is completed.

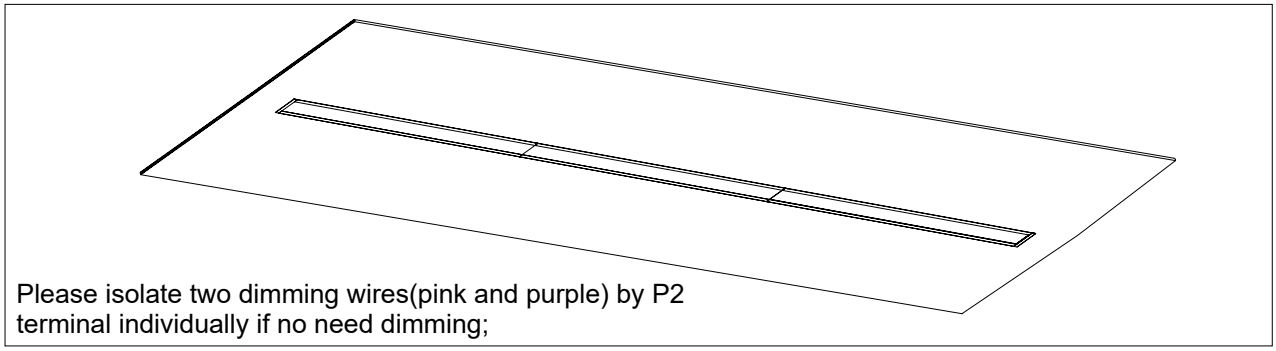


Please isolate two dimming wires(pink and purple) by P2 terminal individually if no need dimming;

9.Remove one side end cap.Cut the soft lens into a suitable length(refer to Diffuser Length Calculator) , and install it to the channel of the fixturehousing.

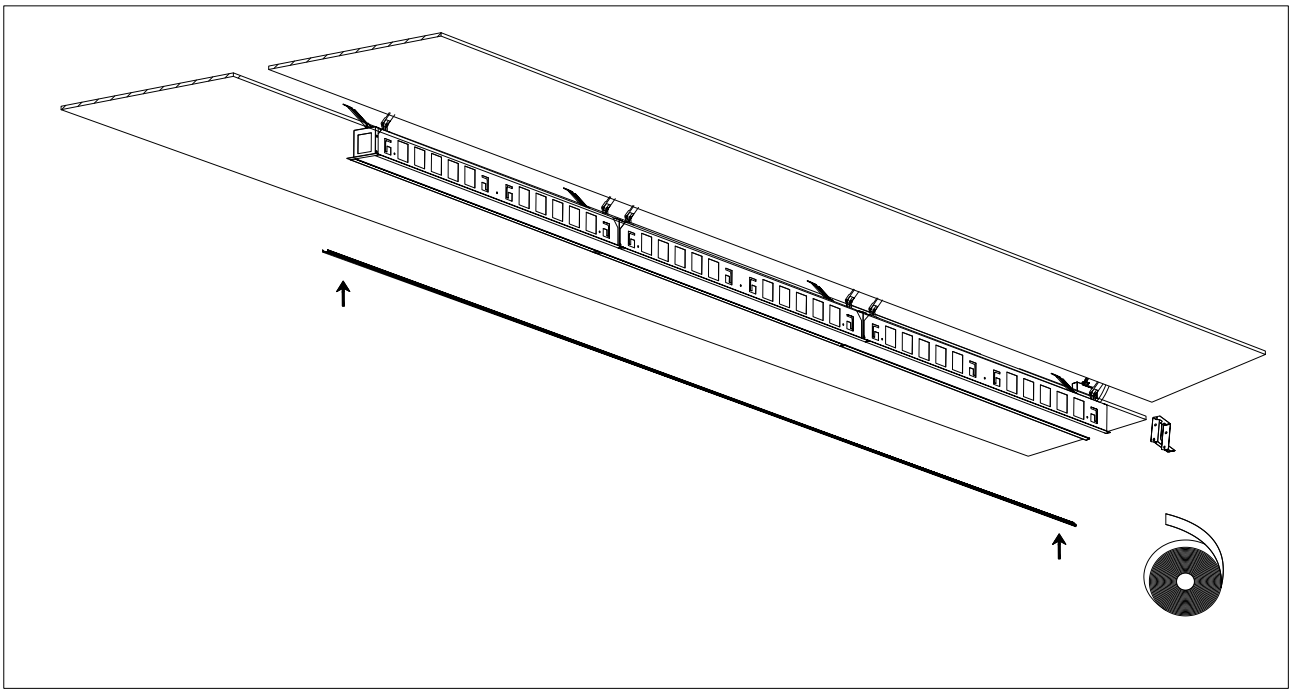

10.Clean up fingerprints and stains.The installation is completed.

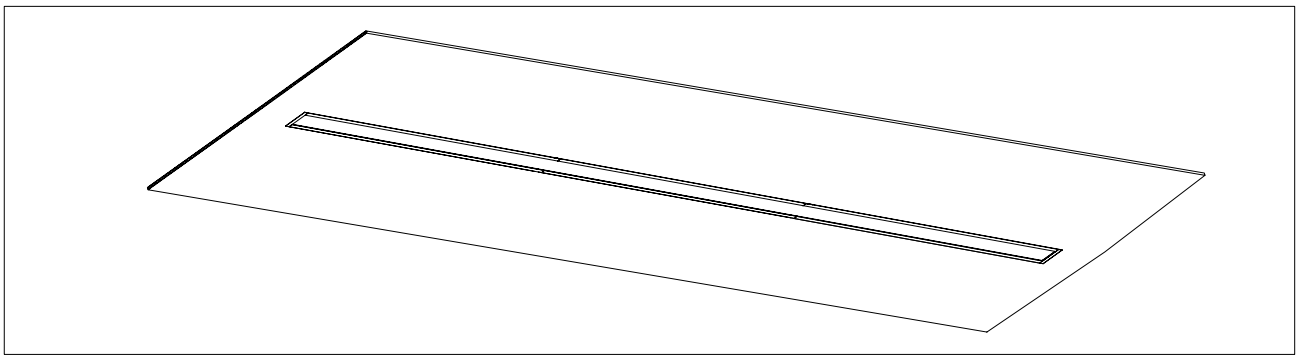

TX HEADQUARTERS
2010 Commerce Dr sales@lightbulbsurplus.com
+1 (469) 857-5693

CA WAREHOUSE
42636 Avenida Alvarado, Temecula, CA 92590
+1 (469) 226-2345

CONTACT