


| | | | |
|-------------|------|------|-----------|
| Version | V2.0 | Date | 8/15/2022 |
| Prepared By | J.C | | |

| PRODUCT SPECIFICATION | |
|-----------------------|---|
| Category | Slim Area Light |
| Item Number | 9609 |
| Stock Code | FXSAL150/850/BZ/T3 |
| Mounting | Pole Mount / Slip Fitter / Yoke Mount/ Wall Mount |
| Housing Color | Bronze (RAL# 8019) |

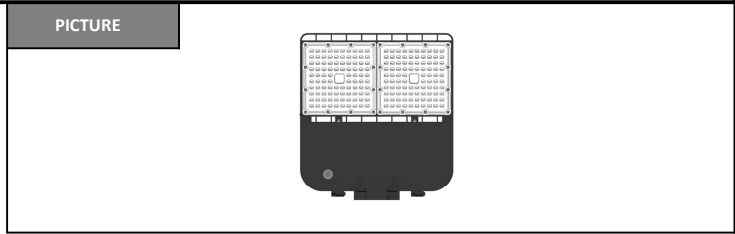

| ELECTRICAL CHARACTERISTICS | | | |
|----------------------------|---------|-------------------------|-----------|
| Rated Wattage (W) | 150 | Replacement Wattage (W) | 400W-575W |
| Tested Wattage (W) | - | | |
| Input Voltage (V) | 120~277 | Surge Protect Level | 10KV |
| Voltage Frequency (Hz) | 50/60HZ | | |
| Input Current (A) | 1.36 | Dimmable | 0 - 10V |
| Power Factor | >0.9 | AUX (12V) Line | Yes |
| THD | ≤ 20% | | |

| PHOTOMETRIC CHARACTERISTICS | | | |
|-----------------------------|---------|----------------|----------|
| Lumen (lm) | 21,000 | CCT (K) | 5000K |
| Efficacy (lm/w) | 140lm/w | Beam Angle (°) | Type III |
| CRI | >80 | | |

| GENERAL CHARACTERISTICS | |
|----------------------------|------------|
| Operating Temperature (°F) | -40 ~ 122 |
| Storage Temperature (°F) | -40~140 |
| IP Rating | IP66 |
| Rated Life | 50000 hrs. |
| Warranty | 5 Years |

| ACCESSORIES | | |
|-------------|----------------|--|
| Item # | Stock Code | Description |
| P10454 | MT-AL/PM8/BZ | Mount - Area Light Pole Mount 8" Bronze |
| P10455 | MT-AL/SF/BZ | Mount - Area Light Slip Fitter Bronze |
| P10456 | MT-SAL/YK12/BZ | Mount - Area Light Yoke mount 12" Bronze |
| P10473 | MT-AL/WM/BZ | Mount - Area Light wall mount Bronze |
| P10371 | SEN-BRI619 | Sensor - 0-10V IP66 12-24V IR head |
| P10467 | LENS-SAL-T4-G1 | Lens - Type IV lens |

| PRODUCT DIMENSIONS | | |
|----------------------|---------------------|--|
| Length- in (mm) | 14.2" (360mm) | |
| Width- in (mm) | 12.01" (307mm) | |
| Height- in (mm) | 2.6" (66mm) | |
| EPA (ft²) | 0.212 ft² (@ 0 deg) | |
| Weight (lbs) | 8 lbs | |
| Mounting Height (ft) | 10-25ft | |
| Cable Length (ft) | 1.64ft | |

| CERTIFICATIONS | | | |
|--------------------|--------------|------|-----|
| UL/ETL | ETL, cETL | CEC | |
| NSF/ETL Sanitation | | JA8 | |
| Energy Star | | FCC | YES |
| DLC | V5.1 Premium | RoHs | YES |

| DOCUMENTS | | | |
|-----------|-----|-------------|-----|
| LM79 | YES | IES File | YES |
| LM80 | YES | Dimmer List | |
| | | | |

| COMMENTS |
|----------|
| |