

Version	V2.0	Date	8/15/2022
Prepared By	J.C		

**PRODUCT SPECIFICATION**

<b>Category</b>	Slim Area Light
<b>Item Number</b>	9612
<b>Stock Code</b>	FXSAL320/840/BZ/T3
<b>Mounting</b>	Pole Mount / Slip Fitter / Yoke Mount/ Wall Mount
<b>Housing Color</b>	Bronze (RAL# 8019)



**ELECTRICAL CHARACTERISTICS**

Rated Wattage (W)	320	Replacement Wattage (W)	1000W-1500W
Tested Wattage (W)	-		
Input Voltage (V)	120~277	Surge Protect Level	10KV
Voltage Frequency (Hz)	50/60HZ		
Input Current (A)	2.91	Dimmable	0 - 10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	≤ 20%		

**PHOTOMETRIC CHARACTERISTICS**

Lumen (lm)	44,800	CCT (K)	4000K
Efficacy (lm/w)	140lm/w	Beam Angle (°)	Type III
CRI	>80		

**GENERAL CHARACTERISTICS**


Operating Temperature (°F)	-40 ~ 122
Storage Temperature (°F)	-40~140
IP Rating	IP66
Rated Life	50000 hrs.
Warranty	5 Years

**ACCESSORIES**

Item #	Stock Code	Description
P10453	MT-AL/PM6/BZ	Mount - Area Light Pole Mount 6" Bronze
P10455	MT-AL/SF/BZ	Mount - Area Light Slip Fitter Bronze
P10456	MT-SAL/YK12/BZ	Mount - Area Light Yoke mount 12" Bronze
P10473	MT-AL/WM/BZ	Mount - Area Light wall mount Bronze
P10371	SEN-BRI619	Sensor - 0-10V IP66 12-24V IR head
P10467	LENS-SAL-T4-G1	Lens - Type IV lens

**PRODUCT DIMENSIONS**

Length- in (mm)	21.65" (550mm)
Width- in (mm)	12.01" (307mm)
Height- in (mm)	2.67" (68mm)
EPA (ft²)	0.25ft² (@ 0 deg)
Weight (lbs)	15.5 lbs
Mounting Height (ft)	20-40ft
Cable Length (ft)	1.64ft

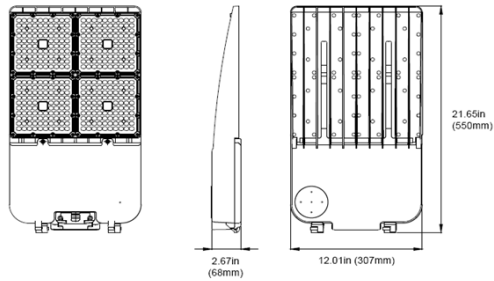

**CERTIFICATIONS**

UL/ETL	ETL, cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	YES
DLC	V5.1 Premium	RoHs	YES

**DOCUMENTS**

LM79	YES	IES File	YES
LM80	YES	Dimmer List	

**COMMENTS**

--	--	--	--