WPD WALL PACK LIGHT

Amber LED Full Cut-off Wall Pack Light for Turtle Safe



Introduction

- The Amber Wall Pack Light is specifically designed for Turtle Safe compliance, emitting amber light with a wavelength of 590 nanometers. While meeting pedestrians' nighttime lighting requirements, it minimizes ecological disturbance to marine life.
- The Amber Wall Pack Light matches traditional metal halide wall lights in size, fully covering old stains. A high-quality polycarbonate lens, which works with a high-efficiency light engine to provide superior illumination.
- Low-impact exterior wall lighting ideal for coastal buildings, farm warehouses, residential exteriors, and environmentally sensitive areas.

Product Specifications

Construction:

- Rugged die-casting aluminum housing with bronze powder coating for durability. Castings are sealed with integral gaskets to prevent the ingress of external contaminants.

Electrical:

- Equipped with a 0-10V continuous driver; Min.Dim Level: 0%. The dimming wires are available for connection to a dimmer.
- Input voltage is 120-277VAC, 50/60Hz.
- Designed to withstand surges of up to L/N-PE:6kV and L-N:4kV.

Optics:

- Turtle and wildlife friendly 590nm amber light.

Finish:

- Standard color is Dark Bronze.

Ambient Temperature:

- -40° F (-40° C) to 113° F (45° C)

Compliances:

- cULus listed for wet locations, max ambient temperature rating 45°C

Warranty:

- 5-year limited warranty.

Ordering Guide

EXAMPLE: WPD63WSAMBUVDCP

Product name WPD	Wattage [1] XXX	LED Color YYY	Input Voltage AA	Finish [2] ZZ	Photocontrol K	Emergency Battery Y
WPD	63WS=63/45/30W 125WS=125/105/76W Note: WS=Wattages Selectable	AMB=Amber 590nm	UV=120-277VAC	DC=Dark Bronze color WC=White color BC=Black color SC=Silvery color GC=Green color OC=Other color	P=with photocell	Blank=without emergency E=with emergency

1.63WS=63W, 45W, 30W Selectable, 63W default setting. 125WS=125W, 105W, 76W Selectable, 125W default setting.


2.Finishes in grey text are custom colors. For orders, please contact us in advance.

For ordering information, please contact sales@lightbulbsurplus.com


Performance Data

Model	Wattage	Lumen	LED Color	Input voltage
WPD63WSAMBUVZZPY	63/45/30W	Max.1,800lm	Amber 590nm	120-277VAC 50/60Hz
WPD125WSAMBUVZZPY	125/105/76W	Max.2,150lm		

Photometrics

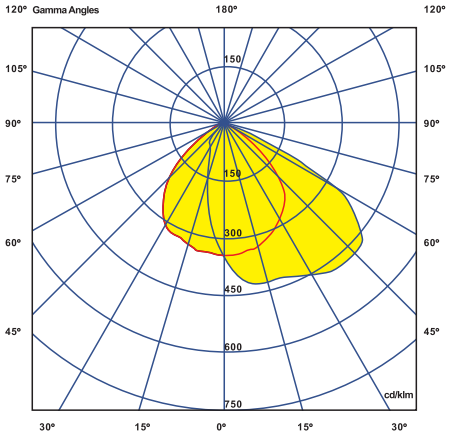



Spectral Chart

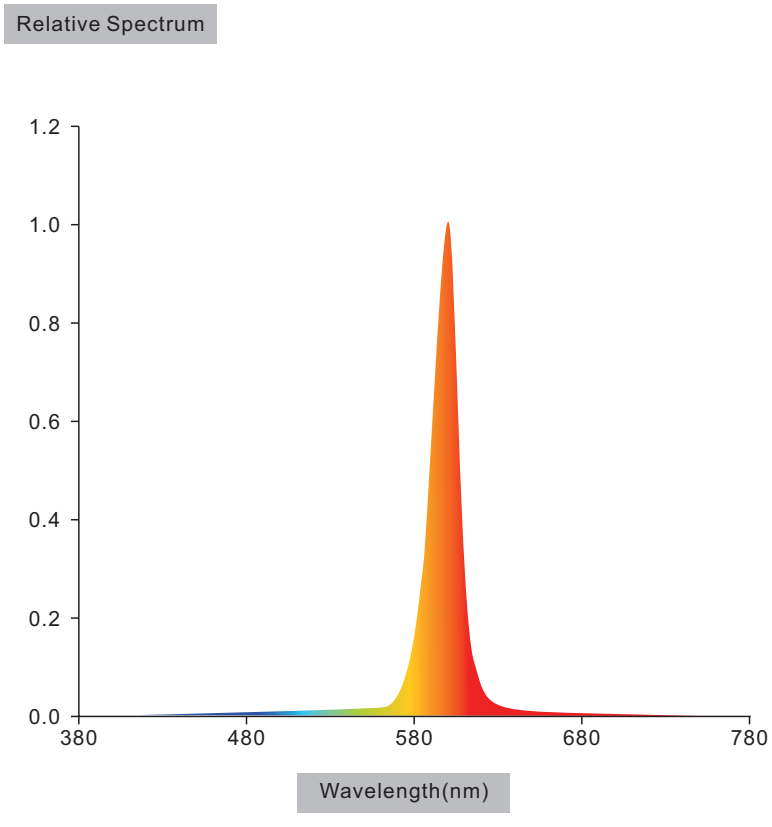

For ordering information, please contact sales@lightbulbsurplus.com

Versatile Selection Capability

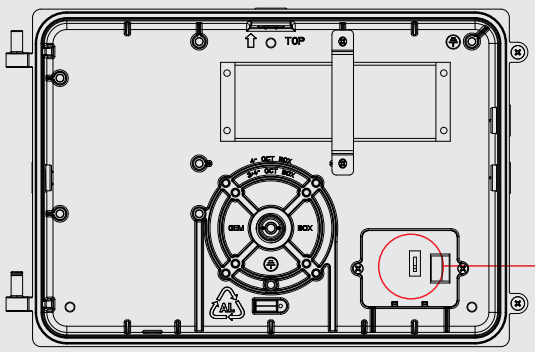



Power Setting

Size	Power Selection	Default Setting
Small	Adjust power between 63/45/30W	63W
Large	Adjust power between 125/105/76W	125W

Note: Before Setting Power, loosen the 2 captive screws in the side of front housing, remove the front case set carefully from the back plate.

Accessories

Control Options

Comes as standard



XPC-B
Photocell -With Sunshade Cover

Emergency Battery Backup

Factory-Installable OR Field-Installable (field-installable purchased separately)






XEBB31-8WDC
Emergency Battery Backup
EMX-08300DO-HY -8W/90min,
for WPD, at 120-277VAC


Electrical Data

Model Series	Wattage(W)	Current (A)			
		Input Voltage (V)			
		120	208	240	277
WPD63WS	30	0.28	0.16	0.14	0.12
	45	0.42	0.24	0.21	0.18
	105				
WPD125WS					

Dimensions

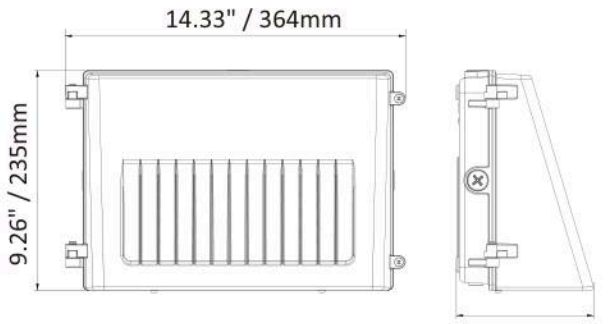

WPD63WS

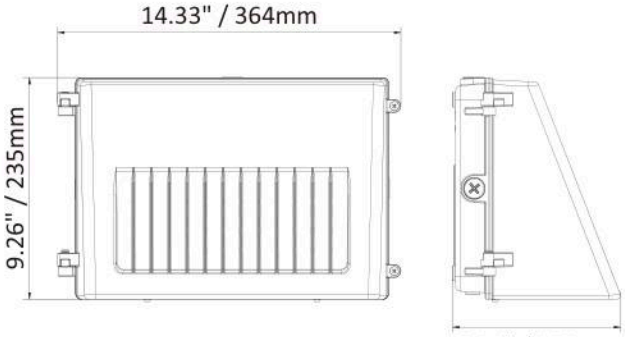

WPD125WS

Shipping Information

Model	Carton Size (in)	G.W. (lbs)	Per carton (pcs)	20GP (pcs)	40HQ (pcs)
WPD63WS	15.75 x 11.42 x 7.17	7.91	1	1,088	2,994
WPD125WS	15.75 x 11.42 x 8.43	9.50	1	940	2,586

Note:The packaging data can sometimes be outdated or incomplete. For the most reliable information, please reach out to us directly.