


SXT-300W-H-H-3CCT

300W/240W/200W Area Light

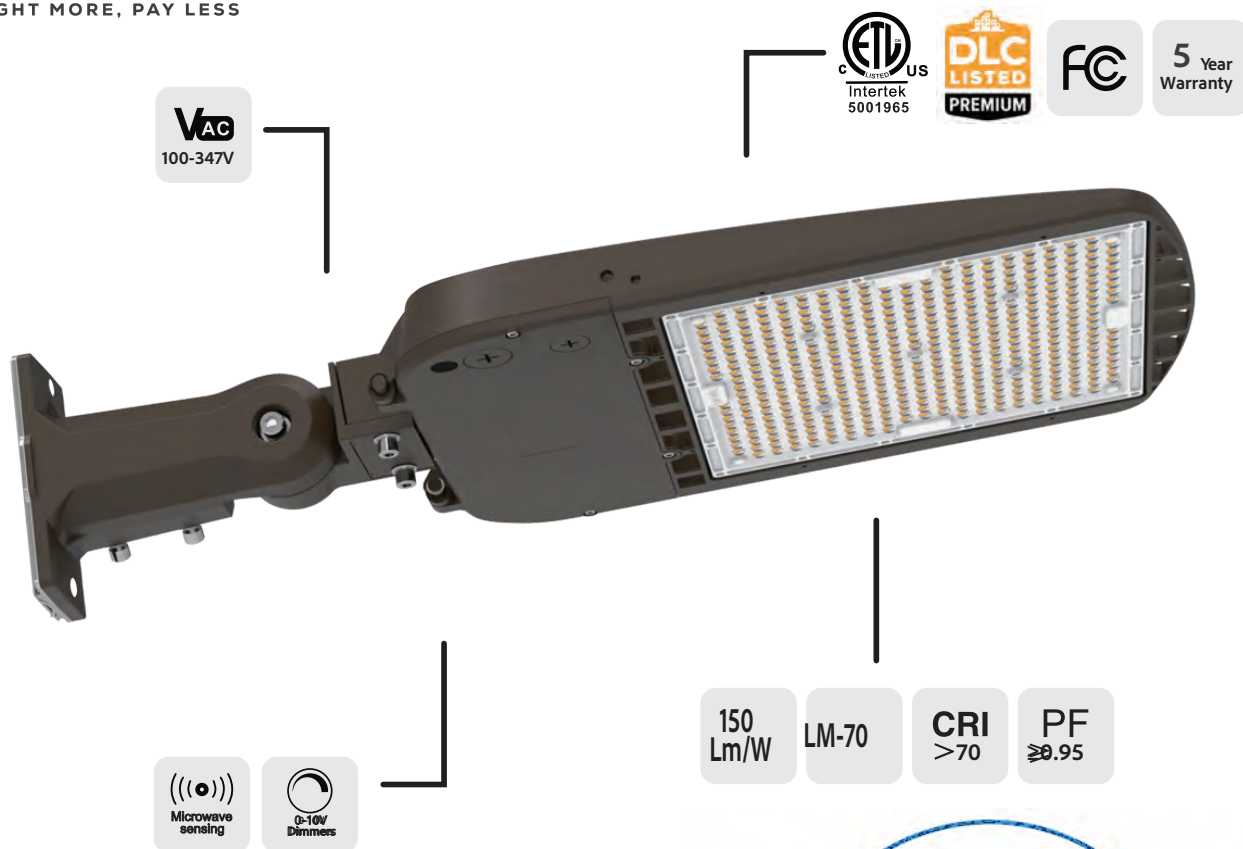

Product Features


- High lumen efficiency >150lm/w.
- IP66 rated for wet location.
- High-efficiency LED Driver, the wide range input voltage AC100-347V
- 3 types of beam angle PC lens for option (TypeⅢ TypeⅣ TypeⅤ)
- Multi-function optional, easy to operate (Normal light, Photocell sensor, Microwave sensor+Photocell sensor)
- Various of connectors available, easy to assemble.

Specification


Part NO.	Power	Input Voltage	IP Rating	Lens angle	Input Current	PF	Light Efficacy	Ra	CCT
SXT-300W-H-H-3CCT	200W/240W/300W	AC120-277V	IP 65	T3 T4 T5	2.0A	>0.9	150lm/W	70	4000K-5000K-6500K

Watt Tunable: Switch 1
200W 240W 300W


CCT Tunable: Switch 2
4000K 5000K 6500K

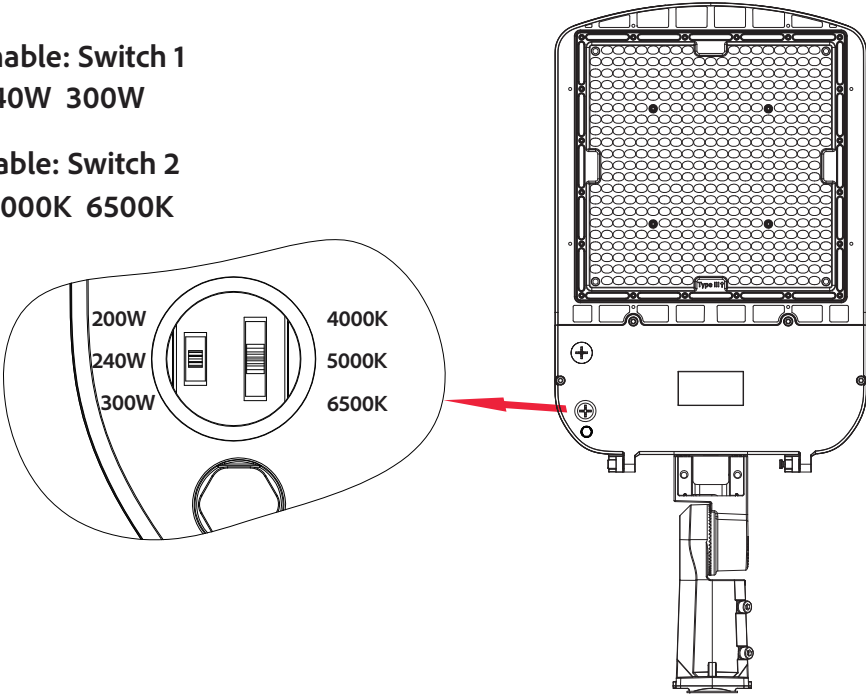

Product Dimension

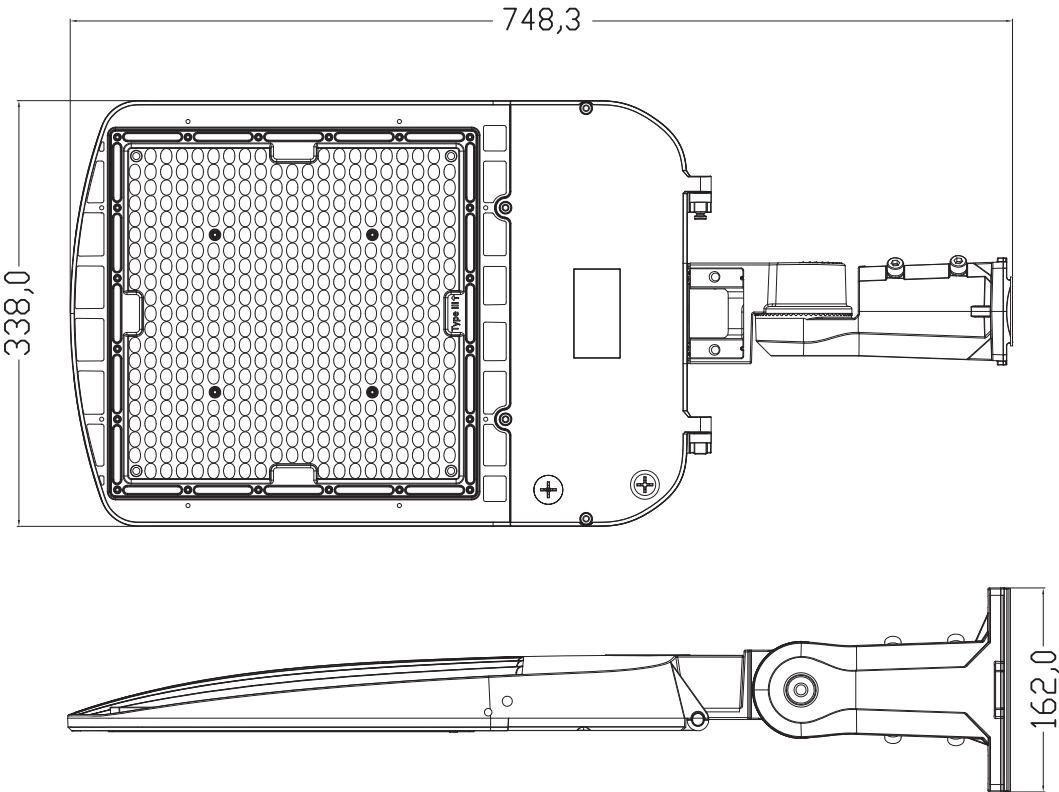


Introduction of Motion sensor and programmable function:

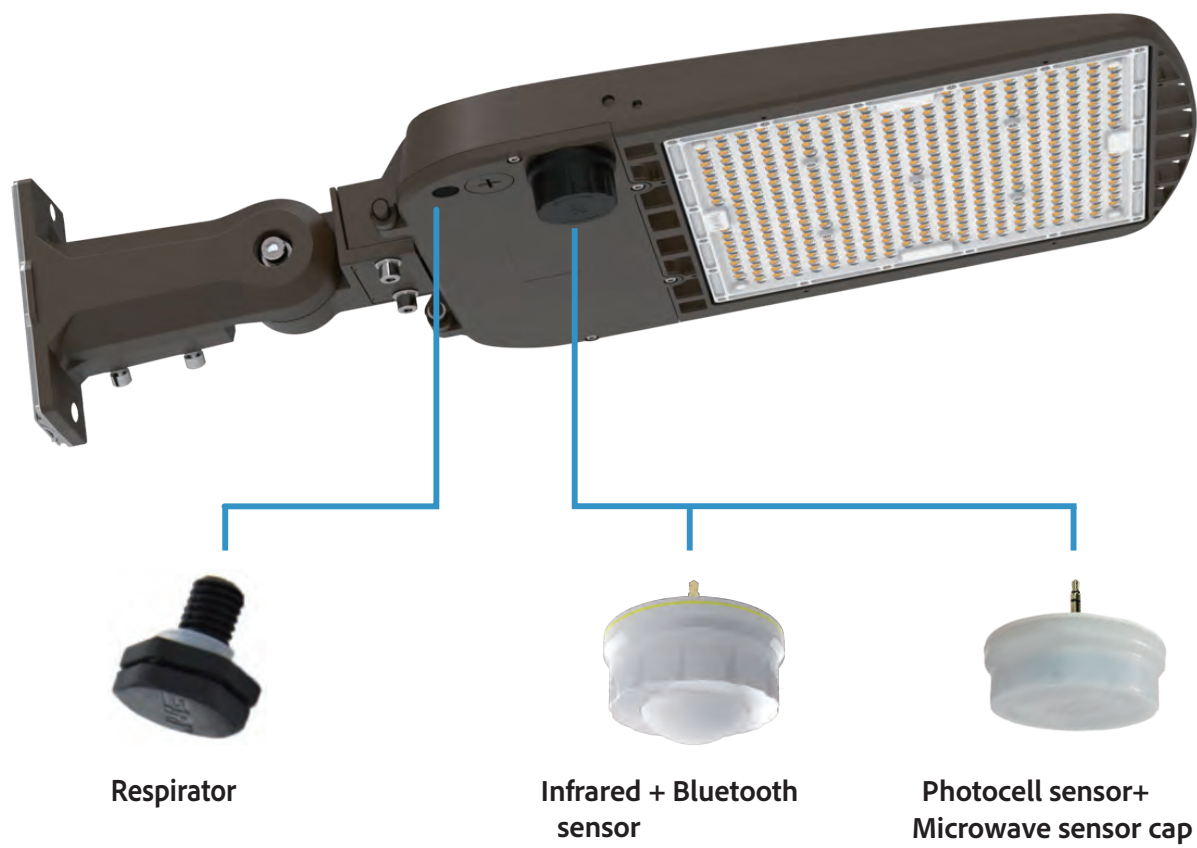


Easy to install: unscrew the waterproof cover and install the sensor you need

Model Number	Sensor Type	Connector	Controller
EFS106-AUX 	PIR	Audio Jack	Keilton APP
EFS07-AUX			SPEC-RM51
ANT-6-4T			RC-100
HD07VR-PH-1			HD06R
HD07VR-PHB-1 			HAISEN BLUE APP
EFS06R-AUX.A4	Microwave		SPEC-RM51
ANT-5-4T			RC-100
HD07VR-MH-1			HD06R
HD07VR-MHB-1 			HAISEN BLUE APP


Three types of Lens for option

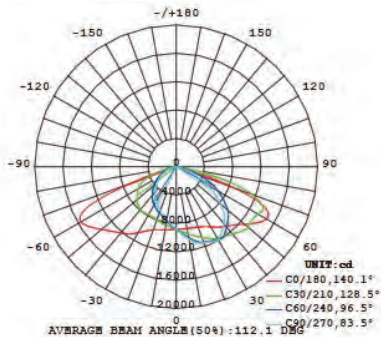

**A:Type III
Standard**

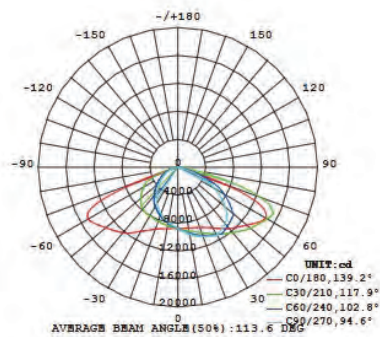

B:Type IV

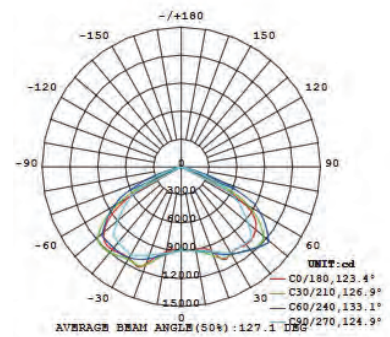

C:Type V

Four types of Mounting Included



A-SLIP FITTER MOUNT



**B-ROTATABLE ROUND
POLE MOUNT**



**C-SQUARE POLE
ROTATABLE MOUNT**



D-TRUNNION