

LED
TECHNOLOGY

100-277VAC, 60Hz, 8Watt



Features:

- UL Listed Driver
- Driver tested UL924 and to CSA C22.2 NO.141 can be field or factory installation
- Low energy consumption CEC compliance
- Includes water tight LED test switch
- Includes mounting hardware
- Bronze aluminum water tight case
- For use with outdoor wall packs, through its standard knockout
- Lumens calculated by multiplying fixture LPW x 8 watts of input power

Applications:




Dimensions

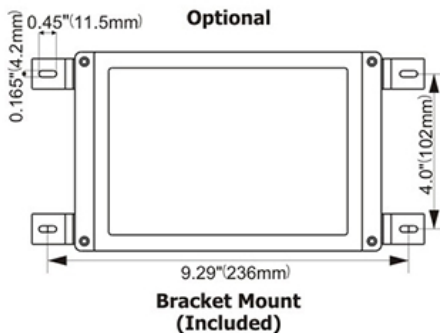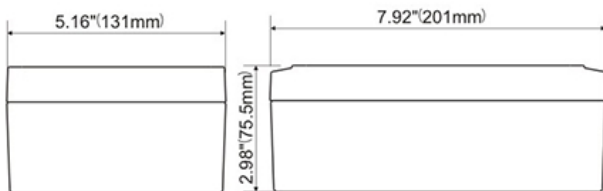

Specifications:

Input Line Voltage	100-277VAC
Input Line Frequency	50/60Hz
Input Current	100mA
Input Power Rating	7W max
Output Voltage	20-50VDC
Emergency Power	8W
Recharge Time	24Hrs
Discharge Time	1.5H
Ambient Temp	0-50°C
Battery	Li-Ion
Weight	3.04LB
Surge Protection	Line-Neutral 3KV

WIRING DIAGRAM

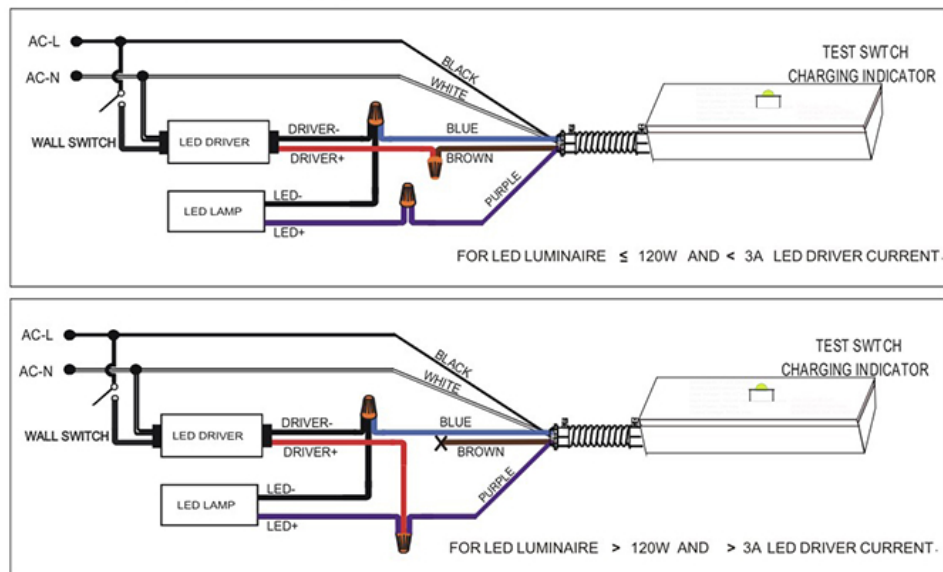

ITEM/Model	Description	Wattage
BK800OD(EMS-08050-YY)	8W Battery Backup with Outdoor Case	8W

2 Year Limited Warranty

Bronze Color