

LED TECHNOLOGY

Use with fluorescent ballast only(TYPE A)


Features:

- Direct Connect plug and play to most fluorescent ballasts* (type A)
- No UV or infrared radiation
- Shatter proof design: Coated glass meets NSF requirements.
- Fused ends protects led end cap over heating issue.





Specification:

Input Line Voltage:	Ballast
Bare Lamp Power	12W
Input Line Frequency	50/60Hz
Lamp Life (Rated)	30,000hrs
Minimum Starting Temp Preferred	-20°/C-4°F
Maximum Operating Temp Preferred	45°C/124°F
CCT	4000K
CRI	≥80
Lumens	1800
CBCP	355
Beam Angle	200°

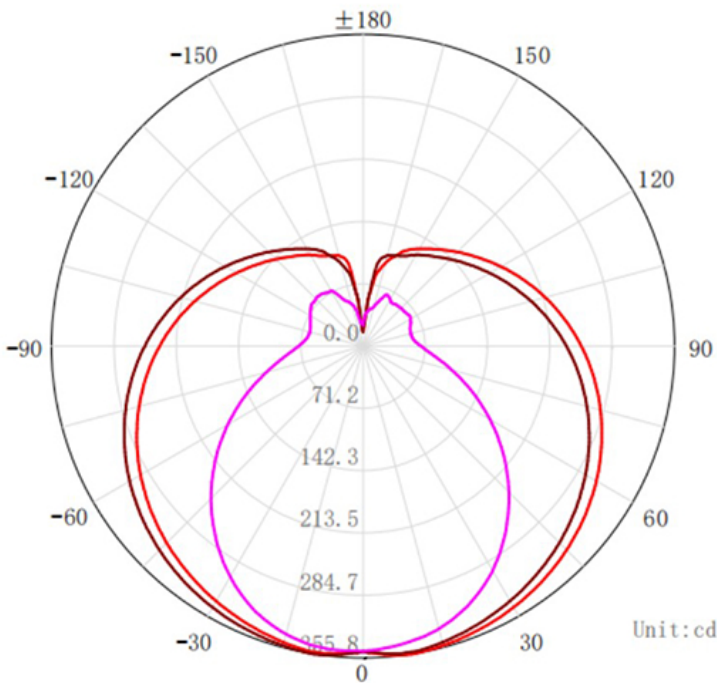

C Plane	[50%MaxAng.]	[10%MaxAng.]
— C180.0_360.0 :	236.2	350.2
— C0.0_180.0 :	236.2	350.2
— C90.0_270.0 :	119.3	347.8

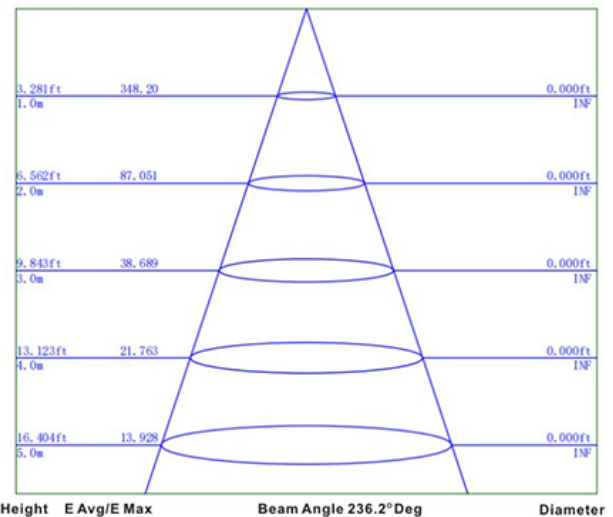

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY
2-YEARS *

Model:#	Description	Bare Lamp Wattage	Lumens	Base
LB48T8-APNP/840-2PK	48" T8 Plug-N-Play Retrofit Lamp (Type A) Cool white 2Pack	12W	1800	G13

*2 Years Limited Warranty

UPC: 746160-800837