


LED
TECHNOLOGY

**50,000 Hours Life, 240/220/200 Watt, 120-277VAC
50/60Hz**

Applications:

*Parking Lots, Security Lighting, Pole, Post Mount,
Walkways, Roadways, Facade Lighting.*

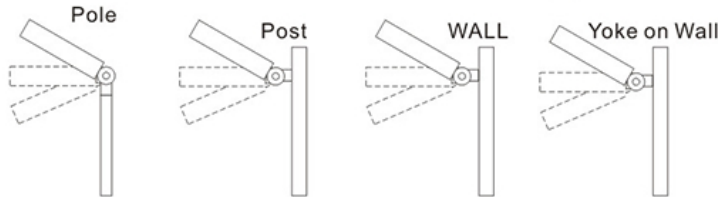

Optional Mounts Available

ADJUSTABLE
LIGHT COLOR

3000K
WARM WHITE

4000K
COOL WHITE

5000K
DAY LIGHT



Features:

- Adjustable Wattage 240/220/200Watt, Replace 600W MH Unit
- Adjustable 3CCT 3000K, 4000K, 5000K
- Suitable For Wet Location (IP65)
- Aluminum Rust Proof Body
- Adjustable Up/Down with Any Arm/Fitter
- Type 3 Light Distribution Pattern
- Accessories Sold Separately

ADJUSTABLE
WATT

240 WATTS	33,600 LUMENS
220 WATTS	30,800 LUMENS
200 WATTS	28,000 LUMENS

Specification:

Input Line Voltage	120-277VAC
Input Power	240/220/200W
Input Line Frequency	50/60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C/-40°F
Maximum Operating Temp	46°C/115°F
CCT	3000K/4000K/5000K
CRI	80
Lumens	33600/30800/28000
Dimmable	0-10V
EPA	1.92ft ²

Accessories:

LWP-SBA-SF
Slip Fitter

LWP-SBA-WPM
Pole Mount/Wall Mount

LWP-SBA-YM
Yoke Mount






Motion Sensor

Photocell



Luminous Intensity Distribution Curve

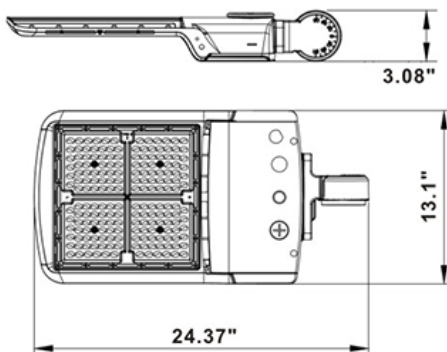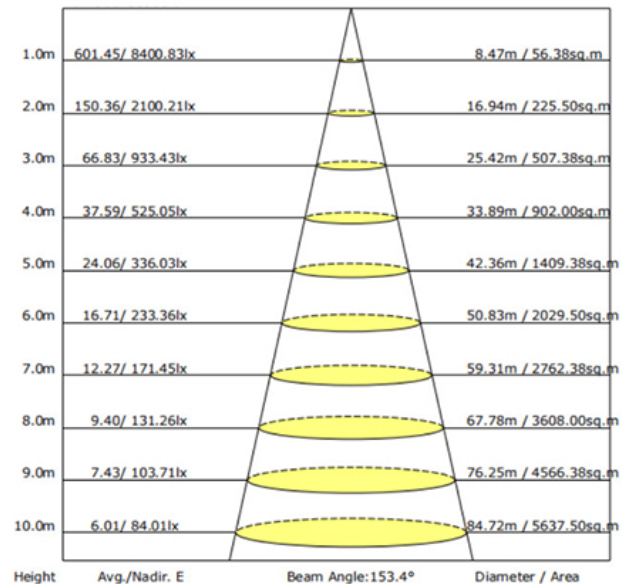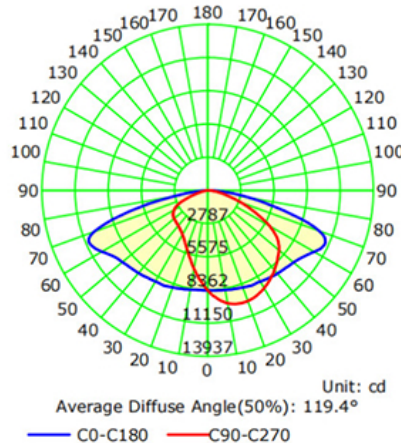

Model:#	Description	Adjustable Wattage	Metal Halide Equivalent	Lumens
LWP240SB/CCT	240/220/200 Watt LED Area Light Bronze Finish, Adjustable CCT	240W 220W 200W	600W	33600 30800 28000

DLC 5.1

*5 Year Limited Warranty

UPC: 80680215433-6

