

LED TECHNOLOGY

**50,000 Hours Life, 26 Watt, Dusk to Dawn
Photocell**



Applications:

Security, Entry Ways, Stairways And Perimeter Areas,
As Well As Residential Exteriors.

Features:

- Adjustable CCT 3000K, 4000K, and 5000K
- Dusk to Dawn Photocell
- Aluminum Base Polycarbonate Plastic Cover
- Instant Start Electronic Unit
- Suitable For Wet Location
- Not Dimmable

Luminous Intensity Distribution Curve

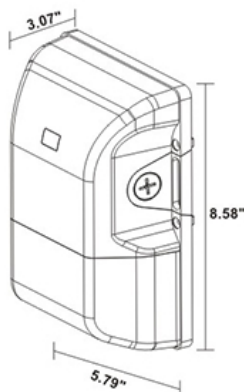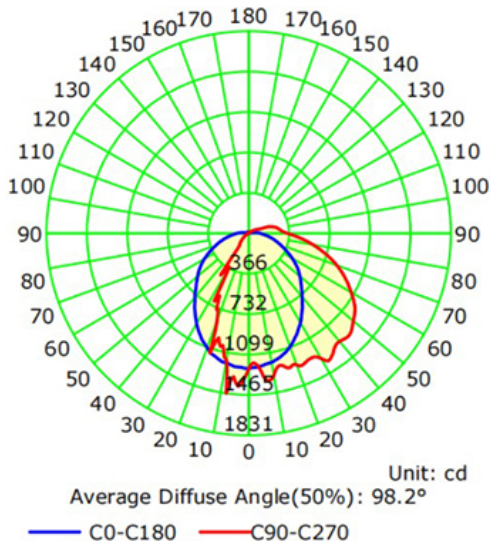

WARRANTY

*** 5-YEAR**

ADJUSTABLE
LIGHT COLOR

3000K
WARM WHITE

4000K
COOL WHITE

5000K
DAY LIGHT



Specification:

Input Line Voltage:	100-277VAC
Input Power:	26W
Input Line Frequency:	60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-20°C/-4°F
Maximum Operating Temp:	40°C/104°F
Adjustable CCT:	3000K/4000K/5000K
CRI:	≥80
Lumens:	3380
CBCP:	1465

1.0m	444.21/ 1226.80lx	2.33m / 4.26sq.m
2.0m	111.05/ 306.70lx	4.66m / 17.04sq.m
3.0m	49.36/ 136.31lx	6.99m / 38.33sq.m
4.0m	27.76/ 76.68lx	9.31m / 68.15sq.m
5.0m	17.77/ 49.07lx	11.64m / 106.48sq.m
6.0m	12.34/ 34.08lx	13.97m / 153.33sq.m
7.0m	9.07/ 25.04lx	16.30m / 208.70sq.m
8.0m	6.94/ 19.17lx	18.63m / 272.59sq.m
9.0m	5.48/ 15.15lx	20.96m / 344.99sq.m
10.0m	4.44/ 12.27lx	23.29m / 425.92sq.m
Height	Avg./Nadir, E	Beam Angle: 98.7° Diameter / Area

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:#	Description	wattage	lumens
LWP25BZ/CCT/P	26Watt Hard Wire LED Light Bronze Body, Adjustable CCT, With Photocell	26W	3380

*5 years Limited warranty

UPC: 793573-74992-5

