

LED
TECHNOLOGY


50,000 Hours Life, 30 Watt, 120-277VAC 60Hz

Applications:

*Parking Lots, Security Lighting, Wall Lighting, Pathway Lighting,
Perimeter Lighting, Building Entryways and Walkways*

Features:

- Adjustable CCT 3000K, 4000K, and 5000K
- 120/277 Dual Voltages
- Aluminum Rust Proof Body
- IP65 Suitable For Wet Location
- 0-10V Dimmable
- Powder Coat Finish
- Includes Photocell with Quick Disconnect



PIVOTING



Specification:

Input Line Voltage:	120-277VAC
Input Power	30W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	45°C/113°F
Adjustable CCT	3000K/4000K/5000K
CRI	≥70
Lumens	4050
CBCP	1570
Dimmable	0-10V



Accessories:

Battery Backup Box
(Waterproof test switch included)



Model# BK400OD

Luminous Intensity Distribution Curve

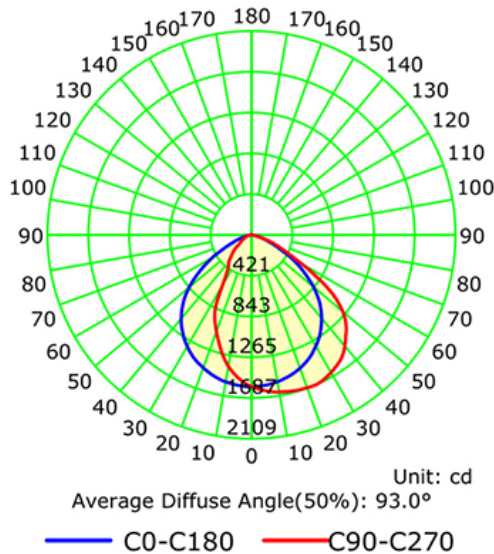

Weight: 12.13lb

Model:#	Description	wattage	lumens
LWP30FCO/CCT	30Watt LED Pivoting Cut Off Wall Light Bronze Body, Adjustable 3CCT	30W	4050

* 5 Year Limited Warranty

UPC: 806802-154800

1.0m	527.60/ 1570.99lx	2.51m / 4.96sq.m	
2.0m	131.90/ 392.75lx	5.02m / 19.82sq.m	
3.0m	58.62/ 174.55lx	7.54m / 44.60sq.m	
4.0m	32.98/ 98.19lx	10.05m / 79.29sq.m	
5.0m	21.10/ 62.84lx	12.56m / 123.88sq.m	
6.0m	14.66/ 43.64lx	15.07m / 178.39sq.m	
7.0m	10.77/ 32.06lx	17.58m / 242.81sq.m	
8.0m	8.24/ 24.55lx	20.09m / 317.14sq.m	
9.0m	6.51/ 19.39lx	22.61m / 401.38sq.m	
10.0m	5.28/ 15.71lx	25.12m / 495.53sq.m	
Height	Avg./Nadir, E	Beam Angle:102.9°	Diameter / Area

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.