

E2WPA

LED Standard Wall Pack fixture
with dusk-to-dawn photocell sensor

energetic
Smarter lighting



Energetic Lighting's E2WPA series LED commercial wall pack fixtures provide a quick and easy solution for warehouse and industrial applications. Available in 36W, 60W and 90W variants, designed to replace traditional 100W-250W equivalent HID wall pack fixtures. The standard design looks and feels just like traditional HID wall packs, but without any of the high wattage heat and maintenance. An integrated dusk-to-dawn photocell sensor automatically turns the fixture on/off relative to ambient light. Constructed out of heavy duty ADC12 die-cast aluminum with robust gaskets and seals to prevent moisture and insect ingress. Each fixture is rated for a minimum L70 of 50,000 hours with a dependable design that will operate hassle-free for many years.

Features

- Borosilicate glass diffusers
- Classic design
- Integrated dusk-to-dawn sensor
- Suitable for wet location use
- Easy and secure installation
- Dimmable with 0-10v systems (36W and 60W)
- Traditional shell provides an easy 1 for 1 replacement on existing fixtures
- TGIC polyester powder coat matte brown color finish

Applications


- Commercial locations
- Warehouse
- Overhead task lighting
- General lighting

Other color temperatures may be available by special request

Specification

Order Number	70041	70042	70024	70022	70023
Model Number	E2WPA36L-750WH	E2WPA60L-750WH	E2WPA36L-750	E2WPA60L-750	E2WPA90L-750
Configuration	with Photocell	with Photocell	with Photocell	with Photocell	with Photocell
Body Color/Finish	White	White	Dark Brown	Dark Brown	Dark Brown
Lumen Output	4651 LM	6657 LM	4651 LM	6657 LM	10500 LM
Luminous Efficacy	129 LM/W	115 LM/W	129 LM/W	115 LM/W	121 LM/W
Input Power	36 W	58 W	36 W	58 W	87 W
Input Voltage	120-277 Vac	120-277 Vac	120-277 Vac	120-277 Vac	120-277 Vac
Power Factor	0.9	0.88	0.9	0.88	0.95
THD	0.15	0.11	0.15	0.11	0.18
Color Temp (CCT)	5000 K	5000 K	5000 K	5000 K	5000 K
Color Rend (CRI)	70	71	70	71	71
Lifetime Rating	50000 hours	50000 hours	50000 hours	50000 hours	50000 hours
Warranty	5 Years	5 Years	5 Years	5 Years	5 Years
Dimmability	0-10v	0-10v	0-10v	0-10v	No
Operating Temp	-40 to 104 (°F)	-40 to 104 (°F)	-40 to 104 (°F)	-40 to 104 (°F)	-40 to 104 (°F)
Environment	Wet Location	Wet Location	Wet Location	Wet Location	Wet Location
DLC			DLC Premium	DLC Standard	DLC Standard
Safety Cert	UL	UL	UL	UL	UL
Weight	5 LBS	5 LBS	5 LBS	5 LBS	5 LBS
Dimensions	13" x9.0" x5.4"	13" x9.0" x5.4"	13" x9.0" x5.4"	13" x9.0" x5.4"	13" x9.0" x5.4"

Photometric Data

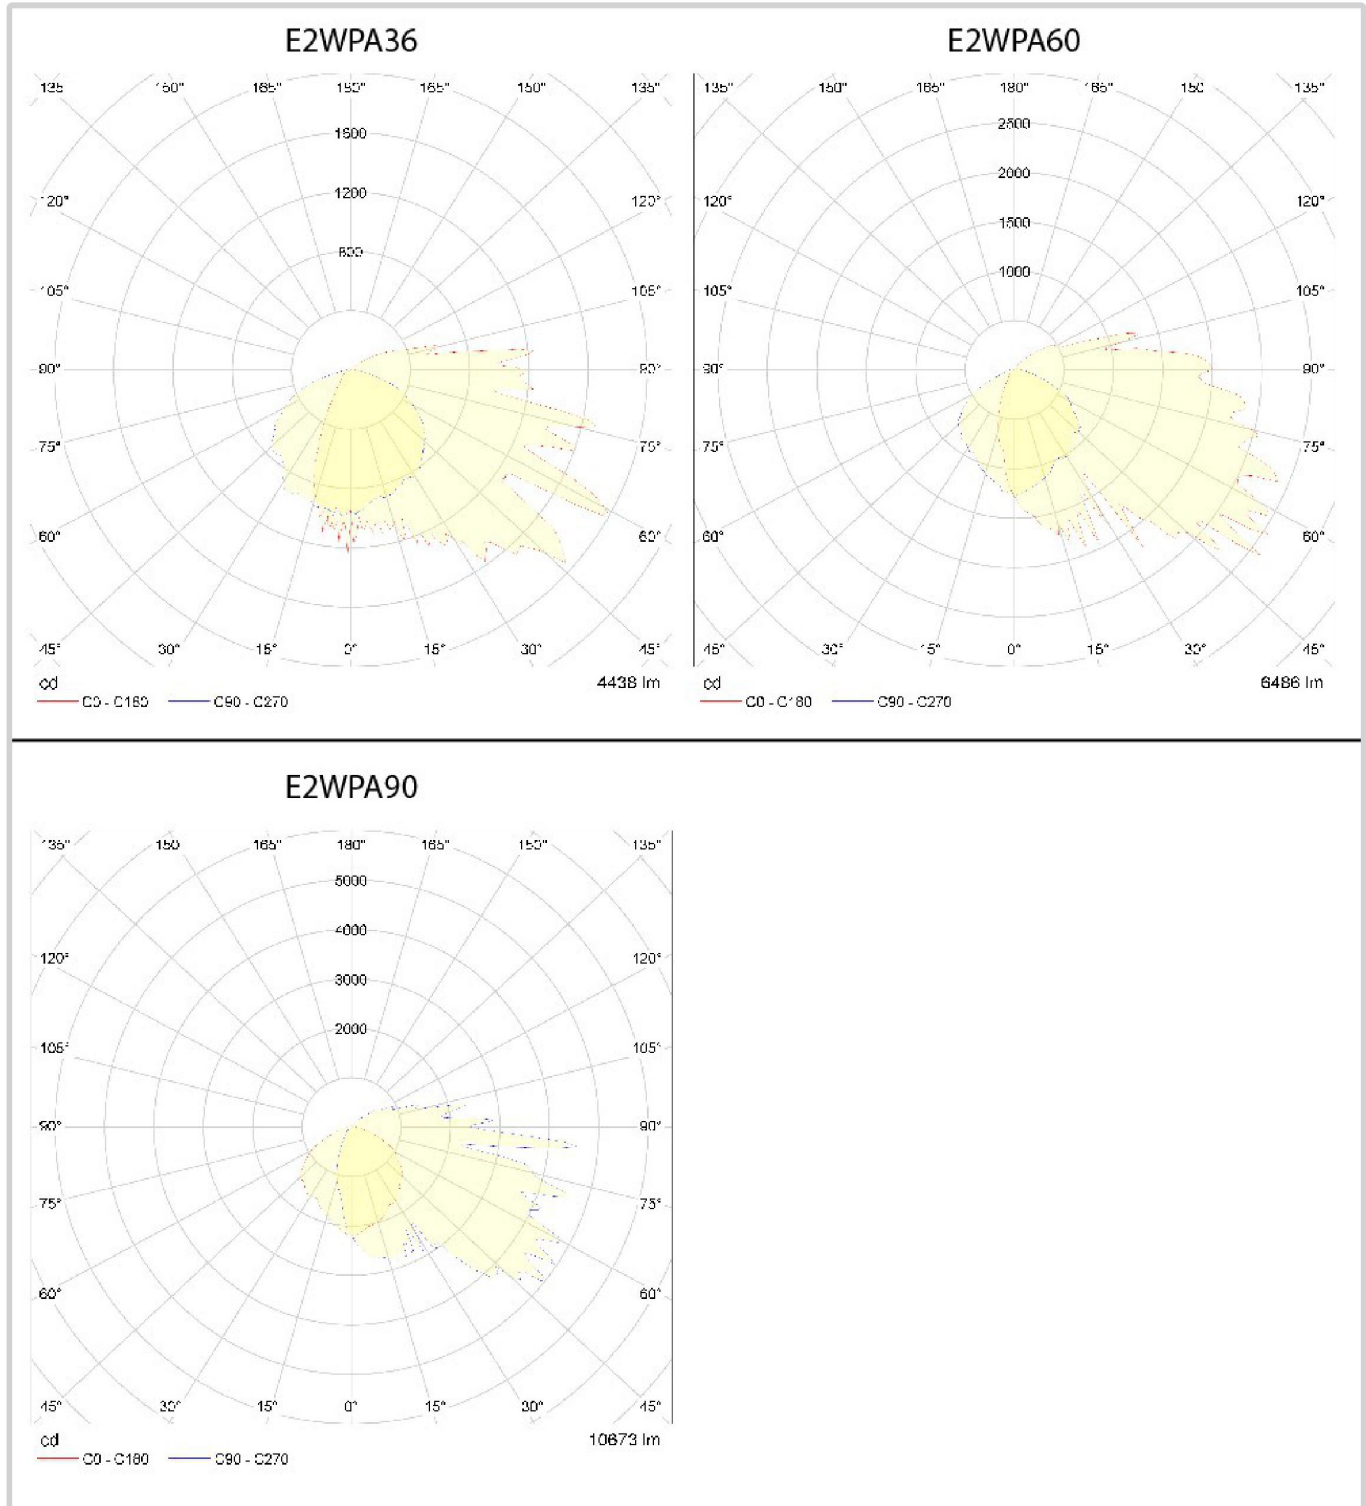

Dimensions and Packaging Info

Model Number	E2WPA36L-750WH	E2WPA60L-750WH	E2WPA36L-750	E2WPA60L-750	E2WPA90L-750
Item UPC	8 4594000765 4	8 4594000764 7	8 4594000709 8	8 4594000635 0	8 4594000636 7
Case UPC			10 8 4594000709 5	10 8 4594000635 7	10 8 4594000636 4
Master Carton UPC				20 8 4594000635 4	20 8 4594000636 1
Item(s) per pack	1	1	1 fixture per package	1 fixture per package	1 fixture per package
packs per case					
Case per Master					
Item weight	10.5 lbs	10.5 lbs	11 lbs	11 lbs	14 lbs
Case weight					
Master Weight					
Item pack dimensions	15.8"(w) x 11.7"(l) x 10"(h)	15.8"(w) x 11.7"(l) x 10"(h)	15.75"(L) x 11.4"(W) x 9.84"(H)	16"(L)x 12"(W) X 11"(H)	16"(L) x 11.5"(W) x 10"(H)
Case dimensions					
Master dimensions					