

LED DOWNLIGHT

Model No. DLC6-14W100swj

The Euri Lighting LED 6" commercial downlight features a switch on the unit which allows for adjustment of the color temperature 2700K/3000K/3500K/4000K/5000K. This downlight is made for easy installation in new construction, remodel, and retrofit projects. Its 90+ CRI and frosted lens allow for true color rendering to bring out vivid colors throughout, and glare-free lighting making it ideal for commercial use in retail spaces, hospitals, offices, and airports. Features include: dimming option, 5CCT selectable, damp rated, Title24 and Energy Star.



70W

REPLACEMENT

14W

14 Watts



5CCT Selectable



90+ CRI



Energy Efficient



Dimmable
(Using Triac)



Damp Rated

Electrical Specifications


| Model No. | Input Power | Input Voltage | Lumen Output | Beam Angle | Center Beam | CCT |
|----------------|-------------|---------------|--------------|------------|-------------|---------------------------------|
| DLC6-14W100swj | 14 W | 120 V | 900-1000 lm | 100° | N/A | 2700 /3000 /3500 4000 /5000K |

| CRI | Luminous Efficacy | Power Factor | Input Current | Base | Lamp Lifespan | Estimated Yearly Cost |
|-----|-------------------|--------------|---------------|-------------|---------------|-----------------------|
| 90+ | 64-71 lm/W | 0.9 | 0.125 A | E26 Adapter | 50,000 Hrs. | \$ 1.68 |

Mechanical Specifications

| Rating | Operational Temperature | Inner Box QTY. | Master Box QTY. | Dimensions(in.) | UPC Code |
|------------|-------------------------|----------------|-----------------|---------------------|--------------|
| Damp Rated | -4°F - 40°F | 1 pcs | 10 pcs | 7.40"(ø) x 2.99"(H) | 811174035060 |

Product Dimensions

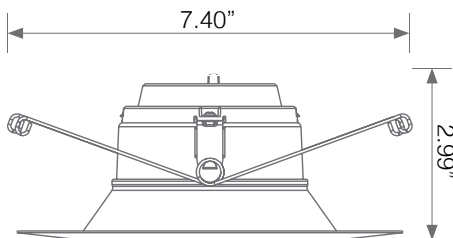

Product Photometric Data

