

Linear T5HE HO

Commercial Grade LED T5 Lamp



RetroFlex™
LED T5 LAMP • Simplicity.

Features & Benefits

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- Compatible with controls and sensors
- No Mercury, No UV
- Works in cold temperature applications
- Glass tube for superior optical performance
- Full Glass Design
- Wide View Angle, 120
- 5 Year Warranty

Product Certification




* EMERGENCY BALLAST RESTRICTIONS

Specification

Order Code ¹	Length	Lamp Wattage	System Wattage	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life	DLC
L24T5HO/830/9G-EB-AC	24 in	9W	12W	3000K	960	83	240	106	80	50000	No
L24T5HO/835/9G-EB-AC	24 in	9W	12W	3500K	960	83	240	106	80	50000	No
L24T5HO/840/9G-EB-AC	24 in	9W	12W	4000K	960	83	240	106	80	50000	No
L24T5HO/850/9G-EB-AC	24 in	9W	12W	5000K	960	83	240	106	80	50000	No

Wiring Diagram

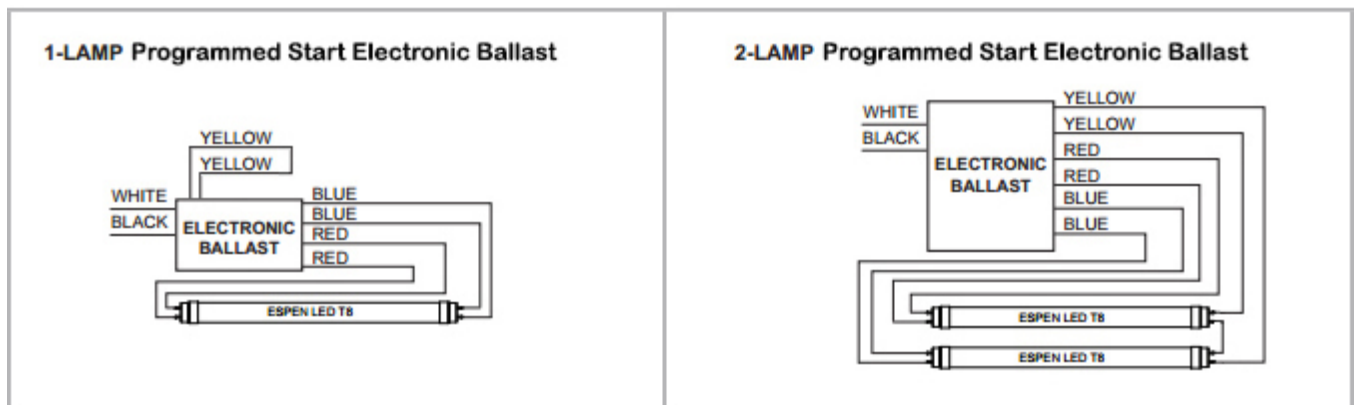

Dlc Information



Order Code	DLC Product ID	DLC Product Model	DLC Version
L24T5HO/830/9G-EB-AC	N/A	N/A	N/A
L24T5HO/835/9G-EB-AC	N/A	N/A	N/A
L24T5HO/840/9G-EB-AC	N/A	N/A	N/A
L24T5HO/850/9G-EB-AC	N/A	N/A	N/A

* Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.

* Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.