

# Single End 0-10V dimming Lamps

Internal Driver LED Lamp Single End Input



**Flex™**  
Internal Driver LED Lamp

## Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Utilizes non-shunted(rapid start) sockets
- Compatible 0-10V Dimming System
- Works in cold temperature applications
- Suitable for damp and dry locations
- -20° F to 130° F ambient operating temperature
- Glass tube for superior optical performance
- 5 Year Warranty
- Superior Wide View Angle

## Product Certification



\* EMERGENCY BALLAST RESTRICTIONS

## Specification

Model No.	Length	Base type	Lamp Wattage	Input Voltage	CCT	Initial Lumens	CRI	Beam Angle	LPW	Power Factor	THD
L24T8/830/9G-ID-10V	24	G13	9	120-277	3000	1100	83	325	115	0.9	<20%
L24T8/835/9G-ID-10V	24	G13	9	120-277	3500	1100	83	325	115	0.9	<20%
L24T8/840/9G-ID-10V	24	G13	9	120-277	4000	1100	83	325	115	0.9	<20%
L24T8/850/9G-ID-10V	24	G13	9	120-277	5000	1100	83	325	115	0.9	<20%


## Order Information

**EXAMPLE: L48T8/840/14G-ID-10V**


L	48	T8	8	40	14 G	-	ID	-	10V
<b>Manufacturer's Code</b>	<b>Normal Lamp Length</b> 48=48"	<b>Lamp Shape</b> T8=T8	<b>CRI</b> 8=>80	<b>CCT</b> 50=5000K 40=4000K 35=3500K	<b>Wattage</b> 14G-14W		<b>Internal Driver</b>		<b>0-10V dimming</b>

Wiring Diagram

Note: Will not operate on shunted sockets. Use only with non-shunted(rapid start) sockets.

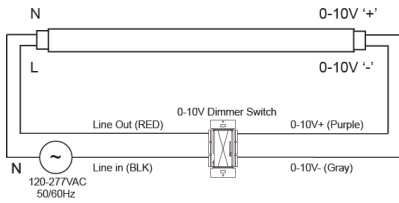

Non-Shunted(rapid Start Socket)

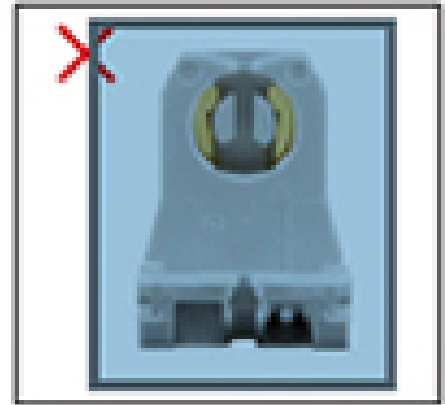

Shunted(Instant Start Socket)

## Dlc Information

Model No.	DLC Product ID	DLC Product Model	DLC Version
L24T8/830/9G-ID-10V	N/A	N/A	N/A
L24T8/835/9G-ID-10V	N/A	N/A	N/A
L24T8/840/9G-ID-10V	N/A	N/A	N/A
L24T8/850/9G-ID-10V	N/A	N/A	N/A