

# Single End 0-10V dimming Lamps

Internal Driver LED Lamp Single End Input



### Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Utilizes non-shunted(rapid start) sockets
- Compatible 0-10V Dimming System
- Works in cold temperature applications
- Suitable for damp and dry locations
- -20° F to 130° F ambient operating temperature
- Glass tube for superior optical performance
- 5 Year Warranty
- Superior Wide View Angle



### Product Certification

\* EMERGENCY BALLAST RESTRICTIONS

## Specification


Model No.	Length	Base type	Lamp Wattage	Input Voltage	CCT	Initial Lumens	CRI	Beam Angle	LPW	Power Factor	THD
L48T8/830/17G-ID-10V	48	G13	17	120-277	3000	2200	83	325	125	0.9	<20%
L48T8/835/17G-ID-10V	48	G13	17	120-277	3500	2200	83	325	125	0.9	<20%
L48T8/840/17G-ID-10V	48	G13	17	120-277	4000	2200	83	325	125	0.9	<20%
L48T8/850/17G-ID-10V	48	G13	17	120-277	5000	2200	83	325	125	0.9	<20%

## Order Information


EXAMPLE: L48T8/840/14G-ID-10V											
L	48	T8	8	40	14 G	-	ID	-	10V		
Manufacturer's Code	Normal Lamp Length 48=48"	Lamp Shape T8=T8	CCT 8=>80	50=5000K	Wattage 14G-14W	Internal Driver	0-10V dimming				
				40=4000K				35=3500K			

Wiring Diagram

Note: Will not operate on shunted sockets. Use only with non-shunted(rapid start) sockets.

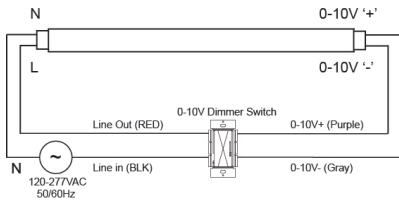

Non-Shunted(rapid Start Socket)

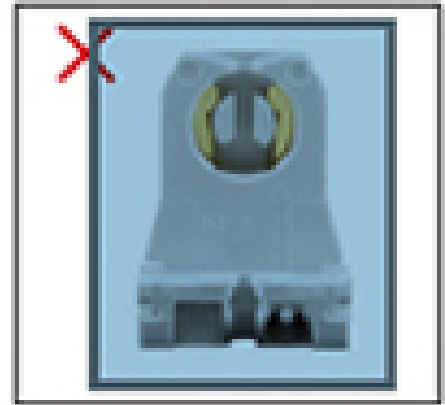

Shunted(Instant Start Socket)

## Dlc Information

Model No.	DLC Product ID	DLC Product Model	DLC Version
L48T8/830/17G-ID-10V	P3YKCNX3	L48T8/830/17G-ID-10V	5.1
L48T8/835/17G-ID-10V	PDLNDBUJ	L48T8/835/17G-ID-10V	5.1
L48T8/840/17G-ID-10V	P7J25EL4	L48T8/840/17G-ID-10V	5.1
L48T8/850/17G-ID-10V	PPZTW4ID	L48T8/850/17G-ID-10V	5.1