

# Linear T5HE HO

Commercial Grade LED T5 Lamp

## Features & Benefits

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- Compatible with controls and sensors
- No Mercury, No UV
- Works in cold temperature applications
- Glass tube for superior optical performance
- High Performance PC Lens
- Super Wide View Angle, 180°
- 5 Year Warranty



**RetroFlex™**  
LED T5 LAMP • Simplicity.




Product Certification

\* EMERGENCY BALLAST RESTRICTIONS

## Specification

Order Code1	Length	Lamp Wattage	System Wattage	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life	DLC
L48T5/830/24P-EB	48 in	24W	27W	3000K	3100	83	240	129	115	50000	Pending
L48T5/835/24P-EB	48 in	24W	27W	3500K	3100	83	240	129	115	50000	Pending
L48T5/840/24P-EB	48 in	24W	27W	4000K	3200	83	240	133	118	50000	Pending
L48T5/850/24P-EB	48 in	24W	27W	5000K	3200	83	240	133	118	50000	Pending

## Wiring Diagram

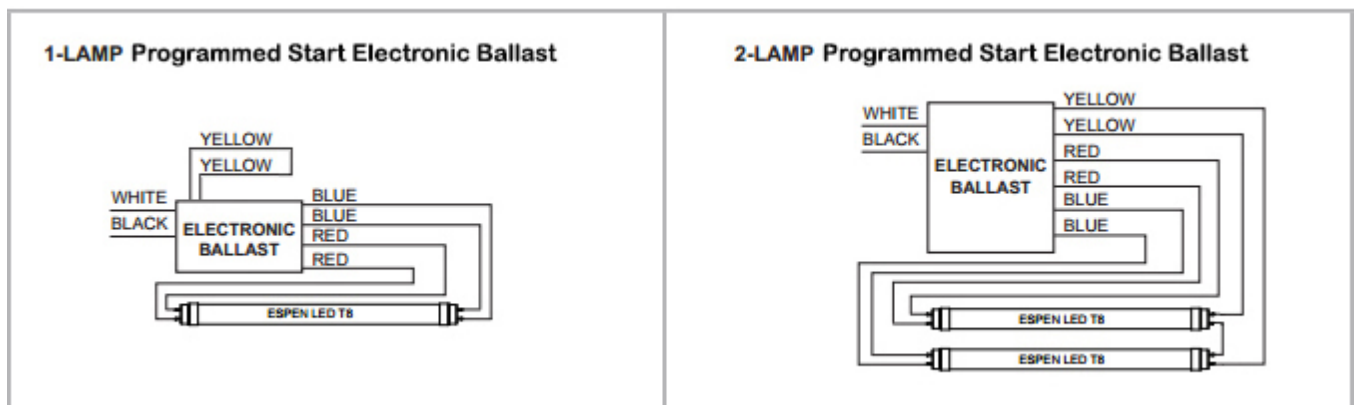

## Dlc Information



Order Code	DLC Product ID	DLC Product Model	DLC Version
L48T5/830/24P-EB	N/A	N/A	N/A
L48T5/835/24P-EB	N/A	N/A	N/A
L48T5/840/24P-EB	N/A	N/A	N/A
L48T5/850/24P-EB	N/A	N/A	N/A

\* Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.

\* Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.