

# Double End Flex lamp

Commercial Grade LED T8 Lamp



**Flex™**  
Internal Driver LED Lamp



Product Certification

## Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Utilizes Fa8 sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- Suitable for damp and dry locations
- -20° F to 130° F ambient operating temperature
- Glass tube for superior optical performance
- 5 Year Warranty

## Specification Data


ModelNo.	Length	Basetype	LampWattage	InputVoltage	CCT	InitialLumens	CRI	BeamAngle	LPW	PowerFactor	THD	Life(h)
L96T8/830/42G-ID DE	96	Fa8	42	120-277	3000K	5500	82	325	130	0.9	<20%	50000
L96T8/835/42G-ID DE	96	Fa8	42	120-277	3500K	5500	82	325	130	0.9	<20%	50000
L96T8/840/42G-ID DE	96	Fa8	42	120-277	4000K	5500	82	325	130	0.9	<20%	50000
L96T8/850/42G-ID DE	96	Fa8	42	120-277	5000K	5500	82	325	130	0.9	<20%	50000

## Order Information

### EXAMPLE: L48T8/840/14G-ID DE

L	48	T8	8	40	14 G	-	ID	DE
Manufacturer's Code	<b>Normal Length</b> 48=48"	<b>Lamp Shape</b> T8=T8	<b>CRI</b> 8=>80	<b>CCT</b> 50=5000K 40=4000K 35=3500K	<b>Wattage</b> 14G-14W		<b>Internal Driver</b>	<b>Double End Input</b>

## Wiring Diagram

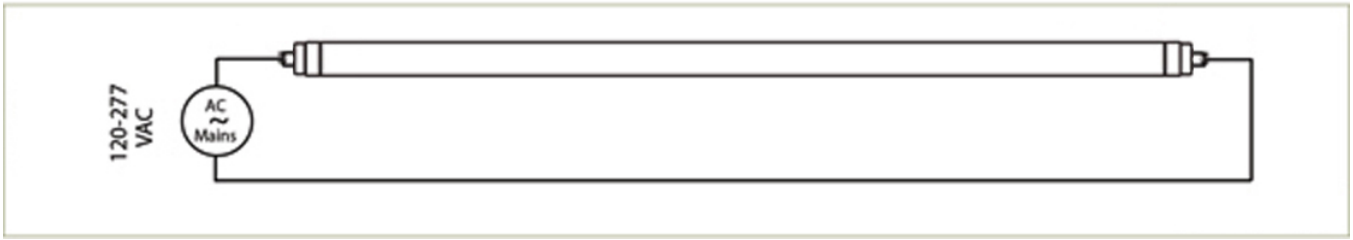

### Dlc Information

Model No.	DLC Product ID	DLC Product Model	DLC Version
L96T8/830/42G-ID DE	PL45UZI4265N	L96T8/830/42G-ID DE	5
L96T8/835/42G-ID DE	PLB1DY1167TU	L96T8/835/42G-ID DE	5
L96T8/840/42G-ID DE	PL6XTC356QHU	L96T8/840/24G-ID DE	5
L96T8/850/42G-ID DE	PL3ACJEKJ37O	L96T8/850/24G-ID DE	5