

Features & Benefits

Type A Application:

- Works on existing compatible Instant Start, Programmed Start, Dimming electronic ballast

Type B Application:

- Internal Driver (Direct 120-277VAC input)
- Long life | High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing instant start or rapid start sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- Glass tube for superior optical performance
- 5 Year Warranty



* EMERGENCY BALLAST RESTRICTIONS




UniFlex™

Commercial Grade LED T8 Lamp

Specification Data (with Normal Ballast Factor)

Order Code	Length	Input Voltage	Power Direct AC	Power w/ Ballast	CCT	Lumen	CRI	Beam Angle	Lamp Efficacy Direct AC	System Efficacy w/ Ballast	Life	DLC
L24T8/830/9G-AB	24	120-277V	9	12	3000K	1350	83	325	150	112	50000	Yes
L24T8/835/9G-AB	24	120-277V	9	12	3500K	1350	83	325	150	112	50000	Yes
L24T8/840/9G-AB	24	120-277V	9	12	4000K	1350	83	325	150	112	50000	Yes
L24T8/850/9G-AB	24	120-277V	9	12	5000K	1350	83	325	150	112	50000	Yes

Wiring diagram

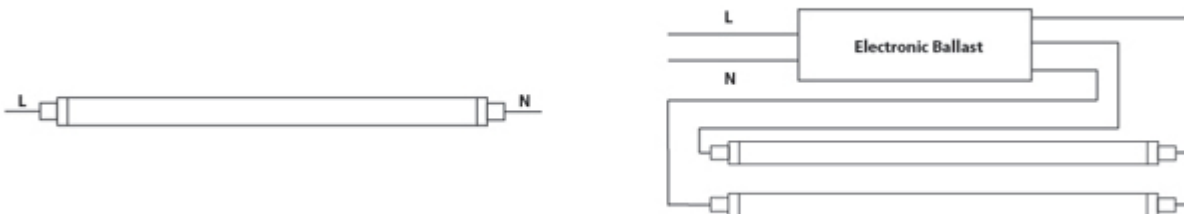

* Please refer to this ["Ballast Compatibility List"](#) for compatible models.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All Specifications are nominal unless noted otherwise.

Copyright © 2018 ESPEN TECHNOLOGY INC. All Rights Reserved.
Eспен Technology Inc. | 12257 Florence Ave. | Santa Fe Springs, CA 90670

Toll Free: (866) 933-7736 | Tel.: (562) 529-2938 | Fax: (562) 529-2978 | Email: info@espentech.com

www.espentech.com