

Double End Flex lamp

Commercial Grade LED T8 Lamp



Flex™
Internal Driver LED Lamp



Product Certification

Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Utilizes shunted or unshunted G13 sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- Suitable for damp and dry locations
- -20° F to 130° F ambient operating temperature
- Glass tube for superior optical performance
- 5 Year Warranty


Specification Data

ModelNo.	Length	Basetype	LampWattage	InputVoltage	CCT	InitialLumens	CRI	BeamAngle	LPW	PowerFactor	THD	Life(h)
L48T8/830/14G-ID DE	48	G13	14	120-277	3000K	1800	82	325	128	0.9	<20%	50000
L48T8/835/14G-ID DE	48	G13	14	120-277	3500K	1800	82	325	128	0.9	<20%	50000
L48T8/840/14G-ID DE	48	G13	14	120-277	4000K	1800	82	325	128	0.9	<20%	50000
L48T8/850/14G-ID DE	48	G13	14	120-277	5000K	1800	82	325	128	0.9	<20%	50000

Order Information

EXAMPLE: L48T8/840/14G-ID DE												
L	48	T8	8	40	14 G	-	ID	DE				
Manufacturer's Code	Normal Length 48=48"	Lamp Shape T8=T8	CRI 8=>80	CCT 50=5000K 40=4000K 35=3500K	Wattage 14G-14W		Internal Driver	Double End Input				

Wiring Diagram

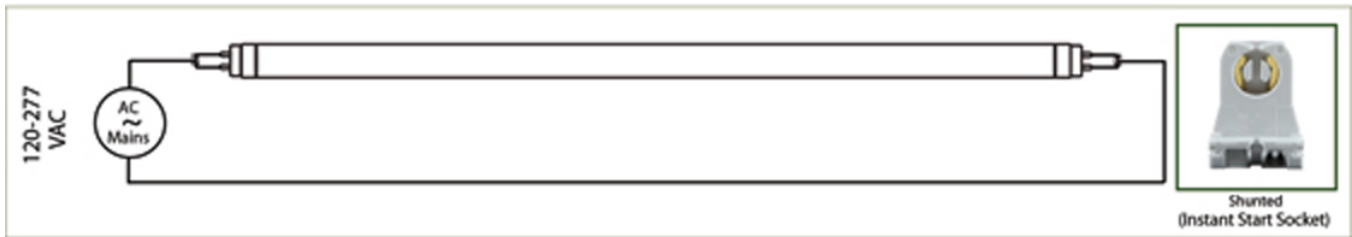

Dlc Information

Model No.	DLC Product ID	DLC Product Model	DLC Version
L48T8/830/14G-ID DE	P7EJ6X3M	L48T8/830/14G-ID DE	5.1
L48T8/835/14G-ID DE	PKBA9N5T	L48T8/835/14G-ID DE	5.1
L48T8/840/14G-ID DE	PCG3GEYZ	L48T8/840/14G-ID DE	5.1
L48T8/850/14G-ID DE	P7A4HPZ9	L48T8/850/14G-ID DE	5.1