

# Linear T8

Commercial Grade LED T8 Lamp



### Features & Benefits

- No rewiring needed
- Works with fluorescent electronic ballast (Instant Start, Programmed Start, and Dimming)\*
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing instant start or rapid start sockets
- Compatible with controls and sensors
- Dimmable
- Works in cold temperature applications
- Glass tube for superior optical performance
- 5 Year Warranty



### Product Certification

\* EMERGENCY BALLAST RESTRICTIONS


## Specification

Order Code 1	Length	Lamp Wattage	System Wattage	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life
L48T8/830/14G-EB	48	14	16	3000K	2100	80+	325	150	131	50000
L48T8/835/14G-EB	48	14	16	3500K	2100	80+	325	150	131	50000
L48T8/840/14G-EB	48	14	16	4000K	2100	80+	325	150	131	50000
L48T8/850/14G-EB	48	14	16	5000K	2100	80+	325	150	131	50000

## System Performance

Lamp Model	Low Ballast Factor				High Ballast Factor			
	Lamp Power	System Power	Lumen Output	Lamp Efficacy	Lamp Power	System Power	Lumen Output	Lamp Efficacy
L48T8/830/14G-EB	11.5	14	1750	152	20	23	2800	140
L48T8/835/14G-EB	11.5	14	1750	152	20	23	2800	140
L48T8/840/14G-EB	11.5	14	1750	152	20	23	2800	140
L48T8/850/14G-EB	11.5	14	1750	152	20	23	2800	140

## Wiring Diagram

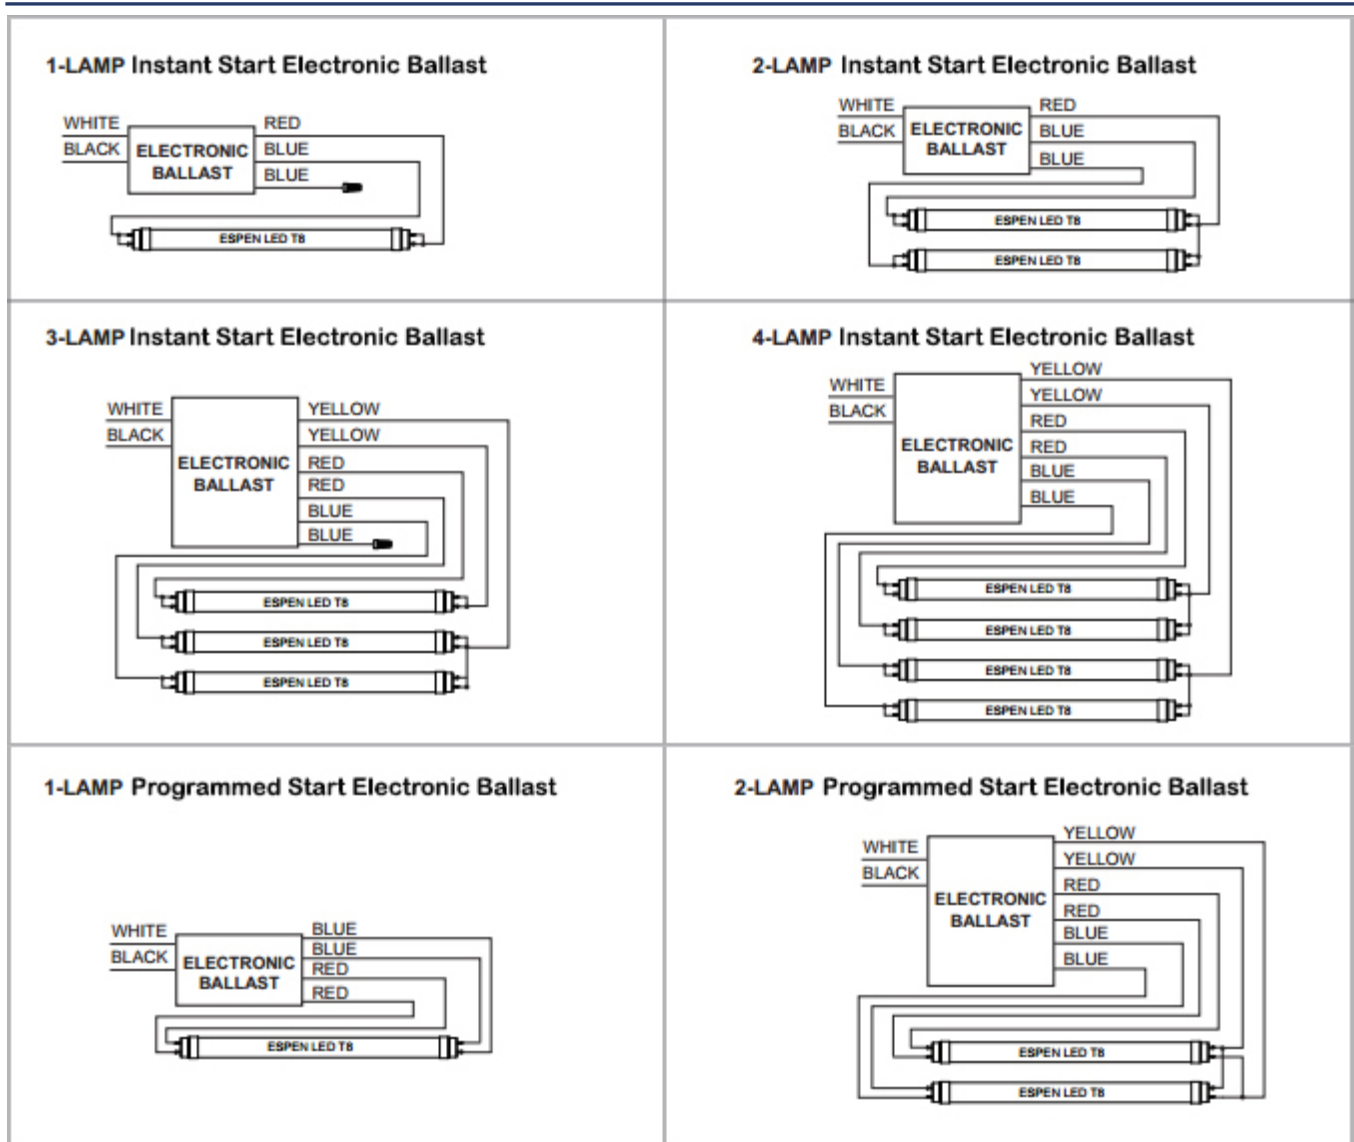

## Dlc Information

Order Code	DLC Product ID	DLC Product Model	DLC Version
L48T8/830/14G-EB	P4YHTK3V	L48T8/830/14G-EB (-aa)	5.1
L48T8/835/14G-EB	P2K7FYDA	L48T8/835/14G-EB (-aa)	5.1
L48T8/840/14G-EB	P2FDVI53	L48T8/840/14G-EB (-aa)	5.1
L48T8/850/14G-EB	PKBW0JV1	L48T8/850/14G-EB (-aa)	5.1

\* Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.

\* Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.