

Double End Flex lamp

Commercial Grade LED T8 Lamp



Flex™
Internal Driver LED Lamp



Product Certification

Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Utilizes shunted or unshunted G13 sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- Suitable for damp and dry locations
- -20° F to 130° F ambient operating temperature
- Glass tube for superior optical performance
- 5 Year Warranty

Specification Data


ModelNo.	Length	Basetype	LampWattage	InputVoltage	CCT	InitialLumens	CRI	BeamAngle	LPW	PowerFactor	THD	Life(h)
L48T8/830/10G-ID DE (HE)	48	G13	9.5	120-277	3000K	1600	82	325	168	0.9	<20%	50000
L48T8/835/10G-ID DE (HE)	48	G13	9.5	120-277	3500K	1600	82	325	168	0.9	<20%	50000
L48T8/840/10G-ID DE (HE)	48	G13	9.5	120-277	4000K	1600	82	325	168	0.9	<20%	50000
L48T8/850/10G-ID DE (HE)	48	G13	9.5	120-277	5000K	1600	82	325	168	0.9	<20%	50000

Order Information

EXAMPLE: L48T8/840/14G-ID DE

L	48	T8	8	40	14 G	-	ID	DE
Manufacturer's Code	Normal Length 48=48"	Lamp Shape T8=T8	CRI 8=>80	CCT 50=5000K 40=4000K 35=3500K	Wattage 14G-14W		Internal Driver	Double End Input

Wiring Diagram

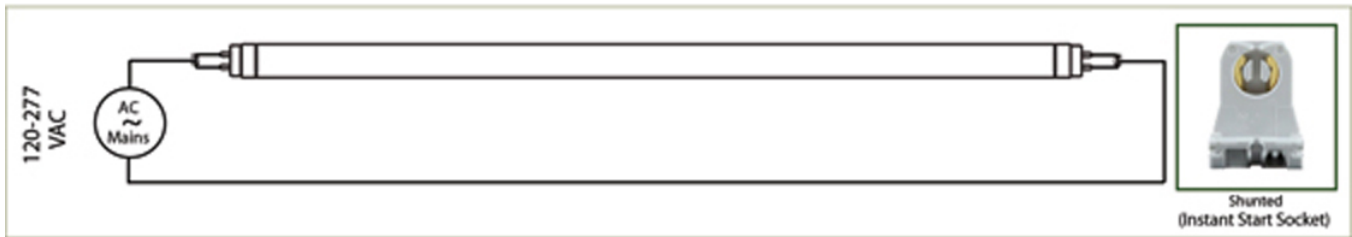

Dlc Information

Model No.	DLC Product ID	DLC Product Model	DLC Version
L48T8/830/10G-ID DE (HE)	P4DT2E48	L48T8/830/10G-ID DE	5.1
L48T8/835/10G-ID DE (HE)	PRG932AC	L48T8/835/10G-ID DE	5.1
L48T8/840/10G-ID DE (HE)	P7ZXETCG	L48T8/840/10G-ID DE	5.1
L48T8/850/10G-ID DE (HE)	PQMN70JX	L48T8/850/10G-ID DE	5.1