

# Nano Plastic Double End Lamp

Commercial Grade LED Lamp Double End Input



## Features & Benefits

- Shatterproof Nano Plastic Tube
- NSF2 Rated
- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Input from Both Ends
- Utilizes shunted or unshunted G13 sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- Superior Wide View Angle
- Suitable for damp and dry locations
- -20° F to 130° F ambient operating temperature
- High performance plastic series
- 5 Year Warranty


## Specification Data

ModelNo.	Length	Basetype	LampWattage	InputVoltage	CCT	InitialLumens	CRI	BeamAngle	LPW	PowerFactor	THD
L36T8/830/12P-ID DE	36	G13	12	120-277	3000K	1500	82	325	125	0.9	<20%
L36T8/835/12P-ID DE	36	G13	12	120-277	3500K	1500	82	325	125	0.9	<20%
L36T8/840/12P-ID DE	36	G13	12	120-277	4000K	1500	82	325	125	0.9	<20%
L36T8/850/12P-ID DE	36	G13	12	120-277	5000K	1500	82	325	125	0.9	<20%

## Order Information

EXAMPLE: L48T8/840/14G-ID DE											
L	48	T8	8	40	12 P	-	ID	DE			
Manufacturer's Code	<b>Normal Leng</b> 48=48"	<b>Lamp Shape</b> T8=T8	<b>CRI</b> 8=>80	<b>CCT</b> 50=5000K 40=4000K 35=3500K	<b>Wattage</b> 12P-12W		<b>Internal Driver</b>	<b>Double End Input</b>			

## Wiring Diagram

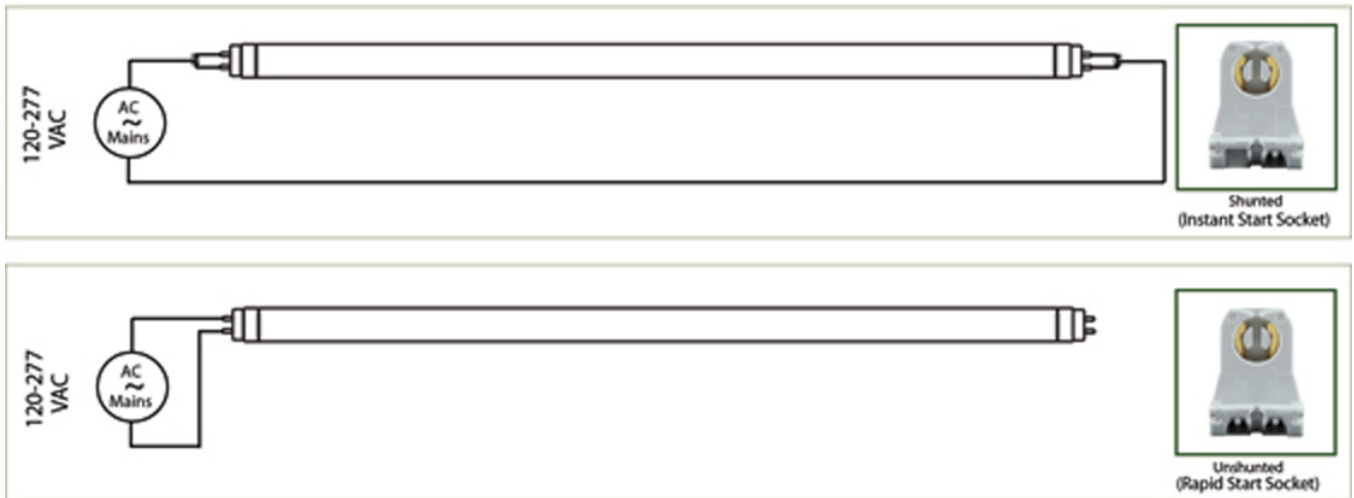

### Dlc Information

Model No.	DLC Product ID	DLC Product Model	DLC Version
L36T8/830/12P-ID DE	PL3WUQTCE2F8	L36T8/830/12P-ID DE(-aa)	5
L36T8/835/12P-ID DE	N/A	N/A	5
L36T8/840/12P-ID DE	PL7HP3FDNCQT	L36T8/840/12P-ID DE(-aa)	5
L36T8/850/12P-ID DE	PLQ4IWAVD8E3	L36T8/850/12P-ID DE(-aa)	5