

#### Features

- 0-10V dimming (10-100%)
- No Polarity: lamp ends can be reversed
- Same wiring as fluorescent lamp/ballast system
- UL 1598C for safety
- Full glass as fluorescent T8
- No Mercury, No UV
- Suitable for Dry and Damp Locations
- Low Temperature Operation
- Instant On
- 50,000 hours with no limitation on On/Off Cycles
- 5-year Warranty
- Evaluated for use in totally enclosed, recessed luminaires, surface mount wall and ceiling luminaires, outdoor luminaires (open surface mount luminaires with compartment protection from weather)
- For use with Class 2 driver only




LED Lamp

## CoreTech LED Series

### Specification Data

Model	Lamp Input Current	System Wattage	Lamp Wattage	Length	CRI	Initial Lumens	Lamp Efficacy (lm/W)	System Efficacy (lm/W)	Beam Angle	CCT
L24T8/940/8G-XT	250mA	10	8	24"	90	1230	153	123	325	4000K
L24T8/940/8G-XT	300mA	11	9	24"	90	1350	150	123	325	4000K
L24T8/940/8G-XT	360mA	12	10	24"	90	1500	150	125	325	4000K

### Wiring Diagram

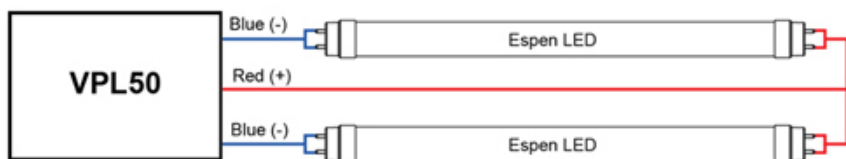

## DLC Information

Order Code	Lamp Input Current	DLC Product ID	DLC Product Model	DLC Product Version
L24T8/940/8G-XT	250mA	N/A	N/A	N/A
L24T8/940/8G-XT	300mA	N/A	N/A	N/A
L24T8/940/8G-XT	360mA	P8HBWNFO	L24T8/940/8G-XT	5.1

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.