

Features & Benefits

- **Type A mode: Compatible with electronic ballast VE259MVHIP and VE259120HIP**
- **Type B mode: Internal Driver (Direct 120-277VAC input)**
- Long life | High CRI
- Instant on, no delay
- Convenient and quick installation
- Accessory: Fa8 and R17d End Cap Adapter Converter, Mounting Clip
- Compatible with controls and sensors
- Works in cold temperature applications
- Glass tube with ArmorCoat Shatterproof Coating
- 5 Year Warranty



* EMERGENCY BALLAST RESTRICTIONS



UniFlex™


Commercial Grade LED T8 Lamp

Specification Data (with Normal Ballast Factor)


Order Code	Length	Input Voltage	Power Direct AC	Power w/ Ballast	CCT	Lumen	CRI	Beam Angle	Lamp Efficacy Direct AC	System Efficacy w/ Ballast	Life	DLC
L96T8HO/830/42G-AB	96	120-277V	42	45	3000K	5500	83	325	130	122	50000	Yes
L96T8HO/835/42G-AB	96	120-277V	42	45	3500K	5500	83	325	130	122	50000	Yes
L96T8HO/840/42G-AB	96	120-277V	42	45	4000K	5500	83	325	130	122	50000	Yes
L96T8HO/850/42G-AB	96	120-277V	42	45	5000K	5500	83	325	130	122	50000	Yes

Wiring diagram


1-LAMP VE259MVHIP/VE250120HIP Wiring (Type A mode)

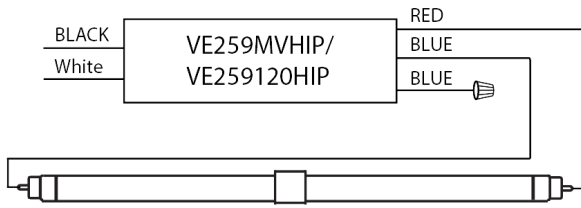

2-LAMP VE259MVHIP/VE250120HIP Wiring (Type A mode)

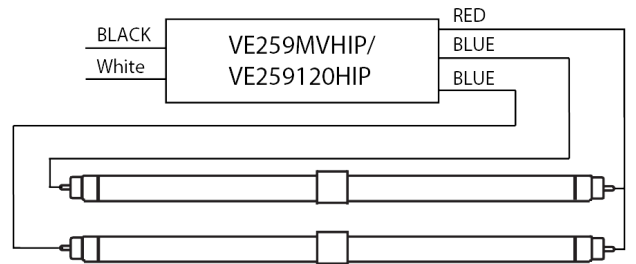

1-LAMP 120-277Vac Direct Wiring (Type B mode)

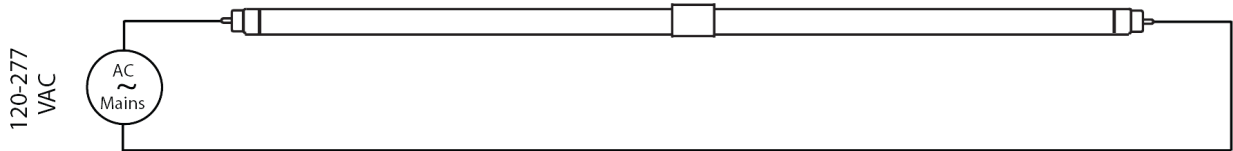

Assembling Demonstration

