

# LED DOWNLIGHT

Model No. **DLC6G-13W105se**

The Euri Lighting **DLC6G-13W105se** Gimbal Downlight, 5CCT selectable, recessed downlight is designed to give you the option between 2700K/3000K/3500K/4000K/5000K all conveniently in one downlight. Its spring-action clips allow for easy, hassle-free installation with no need for housing, reducing maintenance worries. At 650 Lumens and 13 Watts (100 Watt equivalent) input power, the 6" gimbal downlight has an average of 50,000 hours of life and is ENERGY STAR and T24 certified. The **DLC6G-13W105se** is IC Rated, recessed and best suited for low residential ceilings working on AC 120V. Its edge-lit LED technology guarantees a long life of uniform light distribution.



**100W**  
REPLACEMENT

**13W**

13 Watts



5CCT Selectable



Dimmable  
(Triac)



IC  
RATED  
Abutted and  
Covered



90+  
CRI



Wet Rated



## Electrical Specifications


Model No.	Input Power	Input Voltage	Lumen Output	Beam Angle	Center Beam	CCT
DLC6G-13W105se	13 W	120 V	1000 lm	45°	N/A	2700 /3000 /3500 4000 /5000K

CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Estimated Yearly Cost
90+	77 lm/W	0.9	0.111 A	Junction Box	50,000 Hrs.	\$ 1.56

## Mechanical Specifications

Rating	Operational Temperature	Inner Box QTY.	Master Box QTY.	Dimensions(in.)	UPC Code
Wet Rated	-4°F - 104°F	1 pc	24 pcs	6.1"(Ø) x 1.4"(H)	811174037125

## Product Dimensions

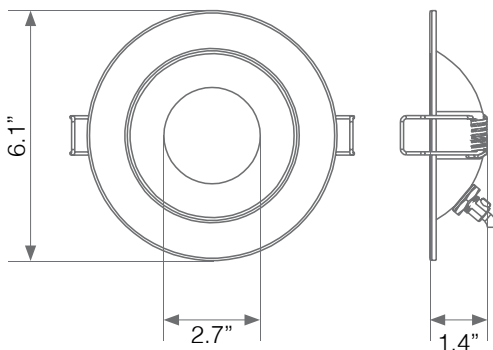

## Product Photometric Data

