

WALL LIGHT

DESCRIPTION




RESIDENTIAL OUTDOOR LIGHT

MODEL: FWL110/FWL220/FWL330/FWL440



NOMENCLATURE	LUMENS(LM)	EFFICACY(LPW)	INPUT VOLTAGE	CRI	DISTRIBUTION	EQUIVALENCY(W)	OPERATING TEMP	WARRANTY
FWL110-15W	1700LM	UP TO 118LPW	120V	>70	N/A	70W MH	-30-40°C	5 YEARS
FWL110-15W-CCT	1700LM	UP TO 118LPW	120V	>70	N/A	70W MH	-30-40°C	5 YEARS
FWL220-28W	3200LM	UP TO 118LPW	120V	>70	N/A	100W MH	-30-40°C	5 YEARS
FWL220-28W-CCT	3200LM	UP TO 118LPW	120V	>70	N/A	100W MH	-30-40°C	5 YEARS
FWL330-45W	5200LM	UP TO 118LPW	120V	>70	N/A	175W MH	-30-40°C	5 YEARS
FWL440-75W	8400LM	UP TO 118LPW	120V	>70	N/A	250W MH	-30-40°C	5 YEARS

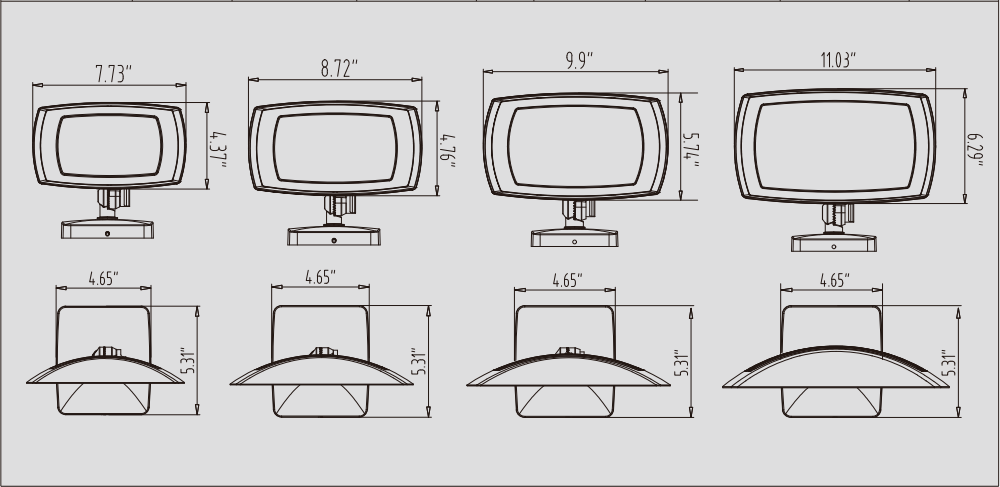

- Wallpack and Floodlight combo. Adjustable wall mount and knuckle are quickly field-installable allowing the fixture to be seamlessly a wallpack and floodlight
- Universal mounting plate with integral wire hooks for easy hands free wall mount installation.
- Impact & weather resistant fixture with die cast housings and clear polycarbonate lenses.
- Photocell included with optional photocell cover
- 2700K, 3000K, 3500K, 4000K, 5000K, CCT adjustable by remote @ 15W/28W
- Name brand chip and DOB technology @ 5 year warranty