




Product Appearance



Product Features

- 1. UL ,FCC,DLC listed.
- 2. Power optional: 4FT 20W-40W-50W-60W-70W, 8FT 60W-70W-80W-90W-100W.
- 3. Lumen efficiency: 150 lm/w.
- 4. Input voltage: 120-277VAC .
- 5. Surface mounting Installation//Suspension Installation.
- 6. Five years'warranty.
- 7. Product Rating : IP65 Rated,Wet Rated.
- 8. Optional Built-in Installation of Sensor and Emergency Power Unit.


Product Dimension

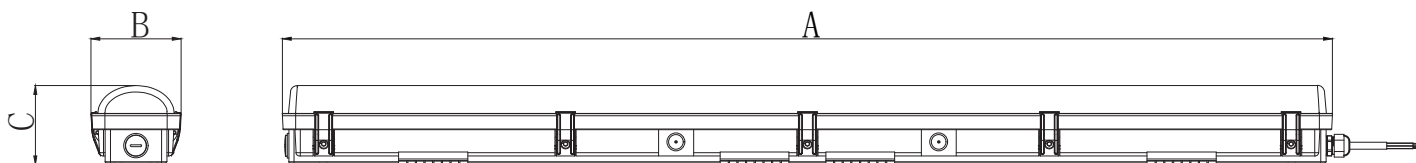

Mode	Size	A (inch)(mm)	B (inch)(mm)	A (inch)(mm)
GL-ST01-70W- HY-XXXXK	4FT	47.24" 1200mm	4.33" 110mm	3.46" 88mm
GL-ST03-100W- HY-XXXXK	8FT	94.49" 2400mm	4.33" 110mm	3.46" 88mm

Specification

Mode	Size	Power	Input Voltage	Dimmable	PF	Light Efficacy	Ra	CCT
GL-ST01-70W-HY-XXXXK	4FT	20W-40W-50W-60W-70W	AC120-277V	0-10V	>0.9	150 lm/w	80	3000K 3500K 4000K 5000K 6500K
GL-ST03-100W-HY-XXXXK	8FT	60W-70W-80W-90W-100W						

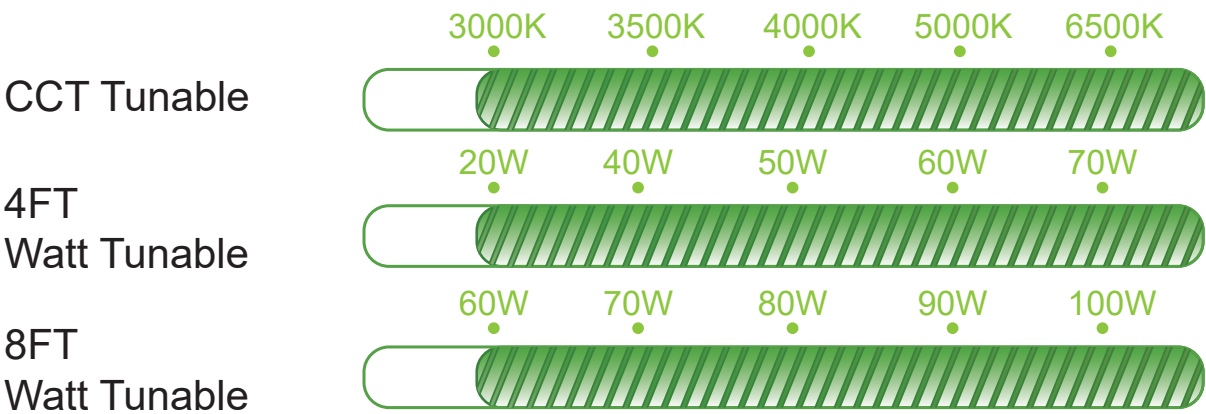


Installation

Surface Mounted Installation

Notice: cut off the power supply and ensure all operations are performed under power-off conditions.

Standard Bill of Materials

*for 8FT fixture



Ceiling mount accessories

4FT×2 PCS

8FT×4 PCS



Expansion tubes

4FT×4 PCS

8FT×8 PCS



Washers

4FT×4 PCS


8FT×8 PCS



Cross pan head self-tapping screws


4FT×4 PCS

8FT×8 PCS

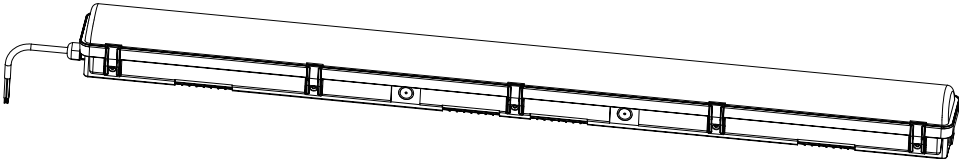


Light fixture ×1 PCS


1. Pre-drill holes on the ceiling according to the dimensions shown in the diagram.

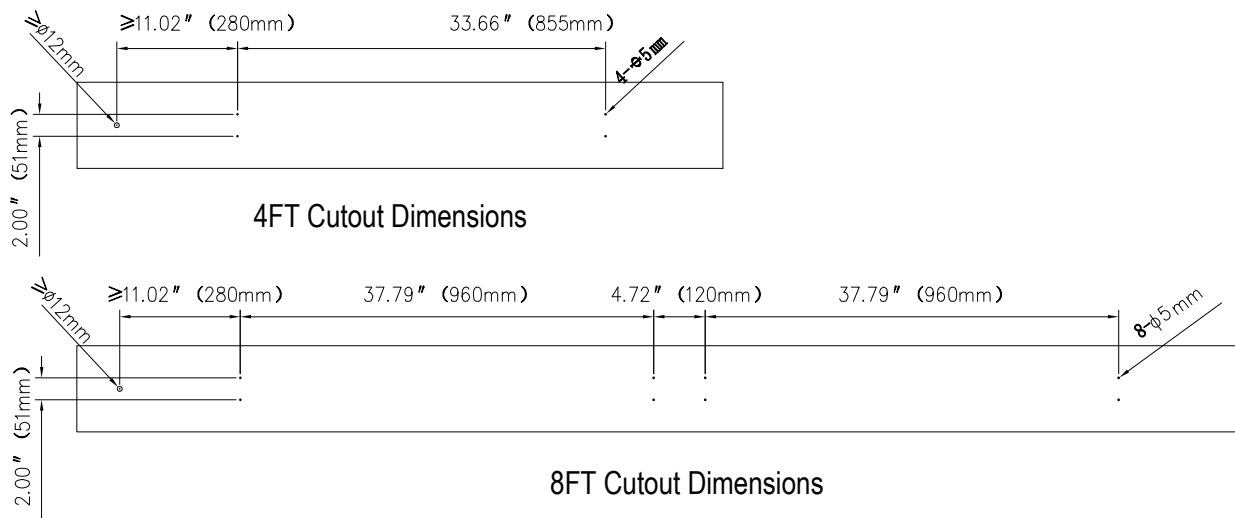

2. Insert the expansion tubes into the $\phi 5mm$ holes in sequence. Align the mounting holes on both sides of the ceiling mounting bracket with the expansion tube holes, place washers, and then tighten the screws.

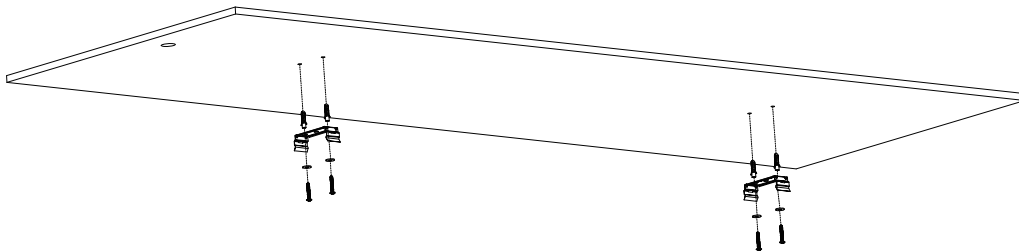

3. Align the luminaire with the slot of the ceiling mounting bracket and push it upward until it snaps into place.

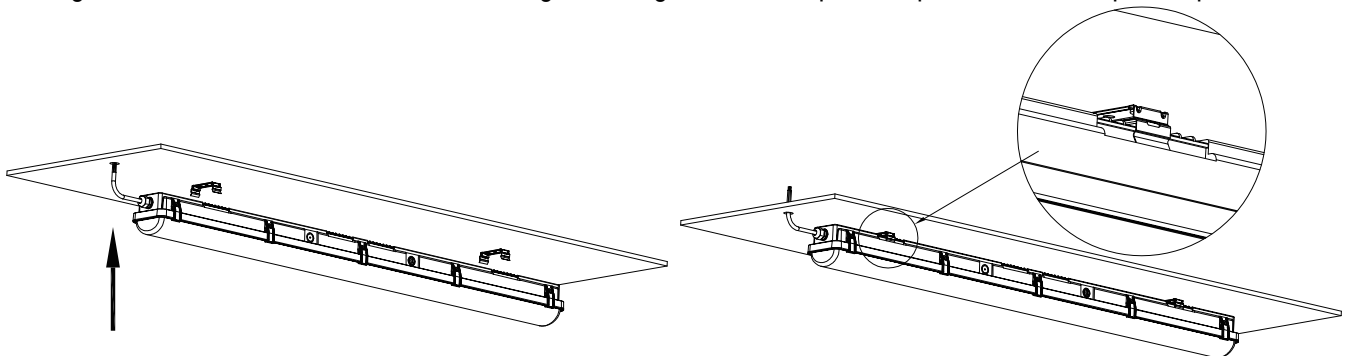

4. Connect the AC line of the luminaire to the mains power supply as shown in the wiring diagram. After completing the installation, restore power and check whether the luminaire functions properly.

