

COMPACT FLUORESCENT LAMPS



CONTENTS

- 58 How to Read a Table
- 59 Bare Spiral Lamps
- 63 Reflector Lamps
- 64 Decorative Lamps
- 65 Single Tube 2-Pin Lamps
- 65 Single Tube 4-Pin Lamps
- 65 Double Tube 2-Pin Lamps
- 66 Double Tube 4-Pin Electronic Lamps
- 66 Triple Tube 4-Pin Electronic Lamps
- 68 High Lumen Long 4-Pin Lamps
- 68 Flat Quad 4-Pin Electronic Lamps
- 69 Bulb and Base Identification
- 70 Cross Reference Guide
- 73 Symbols, Footnotes and Abbreviations

HOW TO READ A COMPACT FLUORESCENT LAMP TABLE

BULB

Designations indicate shape and size. Illustrations can be found on page 69 and at the top of each page.

BASE

Indicates base type. Full base descriptions and illustrations can be found on page 69.

PRODUCT CODE

Abbreviated product description can also be used for ordering. A key to abbreviations can be found on page 74.

PACKAGE QUANTITY

Indicates minimum sell quantity and smallest shipping carton.

COLOR TEMP.

A term used to describe the color of a light source and is expressed in degrees "Kelvin" (K).

AVERAGE LIFE

Average rated life expressed in hours.

MOL

Indicates maximum overall length in inches.

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
------	------	----------------	-----------	--------------	-------------	-----------	-------------	-----	--------	-----------	-----	-----

ProLume CFL Reflector

11 WATT

PAR20	Med.	46005	\$ 2,4,8	CFL11/27/PAR20	Warm White Flood	6/24	2700	82	380	10000	3.86"	2.48"
		46006	\$ 2,4,8	CFL11/35/PAR20	White Flood	6/24	3500	82	380	10000	3.86"	2.48"
		46007	\$ 2,4,8	CFL11/41/PAR20	Cool White Flood	6/24	4100	82	380	10000	3.86"	2.48"
		46008	\$ 2,4,8	CFL11/50/PAR20	Natural White Flood	6/24	5000	82	380	10000	3.86"	2.48"
R20	GU24	46542	\$ 2,4,8	CFL11/27/R20/GU24	Warm White Flood	6/24	2700	82	340	10000	4.02"	2.50"

WATTS

Indicates the power consumed by the lamp during operation.

FOOTNOTES & SYMBOLS

Related footnotes can be found on page 73.

DESCRIPTION

Bulb finish and other important information.

LUMENS

Represents average light output.

PRODUCT NUMBER

Use this number when placing an order.

CRI


An international scale from 0 to 100 that indicates the relative color rendering value of a light source. The color rendering index expresses the degree to which colors will look "natural" under a given light source.

MOD

Indicates maximum overall diameter in inches.

COMPACT FLUORESCENT LAMPS

Self-Ballasted




Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
ProLume CFL Bare Spiral												
5 WATT												
T2	Cand.	45011	\$,1,3,4	CFL5/27/E12	Warm White	10/50	2700	82	250	10000	3.50"	1.38"
		45015	X \$ 1,3,4	CFL5/35/E12	White	10/50	3500	82	250	10000	3.50"	1.38"
		45017	X \$ 1,3,4	CFL5/41/E12	Cool White	10/50	4100	82	250	10000	3.50"	1.38"
		45019	X \$ 1,3,4	CFL5/50/E12	Natural White	10/50	5000	82	250	10000	3.50"	1.38"
	Med.	45010	\$ 1,3,4	CFL5/27	Warm White	10/50	2700	82	250	10000	3.56"	1.38"
		46600	X \$ 1,3,4	CFL5/27/FS	Warm White Full Spiral	10/50	2700	82	300	12000	2.98"	1.93"
		45014	X \$ 1,3,4	CFL5/35	White	10/50	3500	82	250	10000	3.56"	1.38"
		45016	\$ 1,3,4	CFL5/41	Cool White	10/50	4100	82	250	10000	3.56"	1.38"
		45018	\$ 1,3,4	CFL5/50	Natural White	10/50	5000	82	250	10000	3.56"	1.38"
		9 WATT										
T2	Cand.	45031	\$ 1,3,4	CFL9/27/E12	Warm White	10/50	2700	82	500	10000	4.00"	1.57"
		45035	X \$ 1,3,4	CFL9/35/E12	White	10/50	3500	82	500	10000	4.00"	1.57"
		45037	X \$ 1,3,4	CFL9/41/E12	Cool White	10/50	4100	82	500	10000	4.00"	1.57"
		45039	X \$ 1,3,4	CFL9/50/E12	Natural White	10/50	5000	82	500	10000	4.00"	1.57"
	Med.	45030	\$ 1,3,4	CFL9/27	Warm White	10/50	2700	82	500	10000	4.06"	1.57"
		46605	X \$ 1,3,4	CFL9/27/FS	Warm White Full Spiral	10/50	2700	82	500	12000	3.41"	1.93"
		45034	\$ 1,3,4	CFL9/35	White	10/50	3500	82	500	10000	4.06"	1.57"
		45036	\$ 1,3,4	CFL9/41	Cool White	10/50	4100	82	500	10000	4.06"	1.57"
		45038	X \$ 1,3,4	CFL9/50	Natural White	10/50	5000	82	500	10000	4.06"	1.57"
		11 WATT										
T3	Med.	109240	\$ 1,3,4	CFL11/27	Warm White	10/50	2700	82	700	12000	4.29"	1.85"
		109242	\$ 1,3,4	CFL11/41	Cool White	10/50	4100	82	700	12000	4.29"	1.85"
		109244	\$ 1,3,4	CFL11/50	Natural White	10/50	5000	82	700	12000	4.29"	1.85"
		109224	\$ 1,3,4	CFL11/BLU	Blue	10/50	-	-	-	8000	4.29"	1.85"
		109226	X \$ 1,3,4	CFL11/GRN	Green	10/50	-	-	-	8000	4.29"	1.85"
		109220	\$ 1,3,4	CFL11/RED	Red	10/50	-	-	-	8000	4.29"	1.85"
		109222	\$ 1,3,4	CFL11/YEL	Yellow	10/50	-	-	-	8000	4.29"	1.85"
13 WATT												
T2	Cand.	45052	\$ 1,3,4	CFL13/27/T2/E12	Warm White	10/50	2700	82	900	10000	4.19"	1.81"
		45055	\$ 1,3,4	CFL13/35/T2/E12	White	10/50	3500	82	900	10000	4.19"	1.81"
		45057	\$ 1,3,4	CFL13/41/T2/E12	Cool White	10/50	4100	82	850	10000	4.19"	1.81"
		45059	\$ 1,3,4	CFL13/50/T2/E12	Natural White	10/50	5000	82	900	10000	4.19"	1.81"
	Med.	45049	\$ 1,3,4	CFL13/27/T2	Warm White	10/50	2700	82	900	12000	4.19"	1.81"
		45071	\$ 1,3,4	CFL13/27/T2/4PK	Warm White 4-Pack	20/60	2700	82	900	12000	4.19"	1.81"

Compact Fluorescent lamp symbols, footnotes and abbreviations are located on pages 73-74.

COMPACT FLUORESCENT LAMPS


Self-Ballasted



Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
ProLume CFL Bare Spiral continued												
13 WATT continued												
T2	Med.	46610	\$ 1,3,4	CFL13/27/FS	Warm White Full Spiral	10/50	2700	82	840	12000	3.84"	1.93"
		45054	\$ 1,3,4	CFL13/35/T2	White	10/50	3500	82	900	10000	4.19"	1.81"
		45056	\$ 1,3,4	CFL13/41/T2	Cool White	10/50	4100	82	850	10000	4.19"	1.81"
		45073	\$ 1,3,4	CFL13/41/T2/4PK	Cool White 4-Pack	20/60	4100	82	850	10000	4.19"	1.81"
		45058	\$ 1,3,4	CFL13/50/T2	Natural White	10/50	5000	82	900	10000	4.19"	1.81"
	GU24	46506	\$ 1,3,4	CFL13/27/GU24	Warm White	10/50	2700	82	800	10000	3.63"	1.81"
		46525	\$ 1,3,4	CFL13/35/GU24	White	10/50	3500	82	800	10000	3.63"	1.81"
		46526	\$ 1,3,4	CFL13/41/GU24	Cool White	10/50	4100	82	800	10000	3.63"	1.81"
		46527	\$ 1,3,4	CFL13/50/GU24	Natural White	10/50	5000	82	800	10000	3.63"	1.81"
		T3	Med.	45101	\$ 1,3,4	CFL13/27	Warm White	10/50	2700	82	900	10000
45103	\$ 1,3,4			CFL13/35	White	10/50	3500	82	900	10000	4.41"	1.97"
45104	\$ 1,3,4			CFL13/41	Cool White	10/50	4100	82	900	10000	4.41"	1.97"
45105	\$ 1,3,4			CFL13/50	Natural White	10/50	5000	82	900	10000	4.41"	1.97"
45107	\$ 1,3,4			CFL13/65	Daylight	10/50	6500	82	850	10000	4.41"	1.97"
GU24	46544	\$ 3,5,6	CFL13/27/GU24/DIM	Warm White Dimmable	10/50	2700	82	800	10000	4.00"	1.81"	
13/20/25 WATT												
T3	Med.	45720	\$ 4,5,8	CFL25/27/3WAY	Warm White 3-Way	10/50	2700	82	900/ 1200/ 1600	8000	6.13"	2.36"
		45721	\$ 4,5,8	CFL25/41/3WAY	Cool White 3-Way	10/50	4100	82	900/ 1200/ 1600	8000	6.13"	2.36"
15 WATT												
T3	Med.	109252	\$ 4,5,8	CFL15/27	Warm White	10/50	2700	82	950	10000	4.94"	1.85"
		109330	\$ 4,5,8	CFL15/35	White	10/50	3500	82	950	10000	4.94"	1.85"
		109261	\$ 4,5,8	CFL15/41	Cool White	10/50	4100	82	950	10000	4.94"	1.85"
		109272	\$ 4,5,8	CFL15/50	Natural White	10/50	5000	82	950	10000	4.94"	1.85"
		109270	\$ 4,5,8	CFL15/BLB	Blacklight-Blue	1/20	-	-	-	12000	4.94"	1.85"
		109288	\$ 4,5,8	CFL15/YEL	Yellow	1/50	-	-	-	12000	4.94"	1.85"
		46330	\$ 1,3,6	CFL15/27/DIM	Warm White Dimmable	10/50	2700	82	900	10000	4.92"	1.81"
18 WATT												
T2	Med.	45062	\$ 1,3,4	CFL18/27/T2	Warm White	10/50	2700	82	1100	10000	4.56"	2.13"
		45064	\$ 1,3,4	CFL18/35/T2	White	10/50	3500	82	1100	10000	4.56"	2.13"
		45065	\$ 1,3,4	CFL18/41/T2	Cool White	10/50	4100	82	1100	10000	4.56"	2.13"
		45066	\$ 1,3,4	CFL18/50/T2	Natural White	10/50	5000	82	1100	10000	4.56"	2.13"
		GU24	46512	\$ 1,3,4	CFL18/27/GU24	Warm White	10/50	2700	82	1200	10000	3.90"
	46519		\$ 1,3,4	CFL18/35/GU24	White	10/50	3500	82	1200	10000	3.90"	2.13"
	46520		\$ 1,3,4	CFL18/41/GU24	Cool White	10/50	4100	82	1200	10000	3.90"	2.13"
	46521		\$ 1,3,4	CFL18/50/GU24	Natural White	10/50	5000	82	1200	10000	3.90"	2.13"

COMPACT FLUORESCENT LAMPS

Self-Ballasted




Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
ProLume CFL Bare Spiral continued												
18 WATT continued												
T3	Med.	45120	\$ 1,3,4	CFL18/27	Warm White	10/50	2700	82	1200	12000	5.24"	2.05"
		45122	\$ 1,3,4	CFL18/35	White	10/50	3500	82	1200	12000	5.24"	2.05"
		45123	\$ 1,3,4	CFL18/41	Cool White	10/50	4100	82	1200	12000	5.24"	2.05"
		45124	\$ 1,3,4	CFL18/50	Natural White	10/50	5000	82	1200	12000	5.24"	2.05"
	GU24	46546	\$ 3,5,6	CFL18/27/GU24/DIM	Warm White Dimmable	10/50	2700	82	1200	10000	4.40"	2.05"
20 WATT												
T3	Med.	109254	\$ 1,3,4	CFL20/27	Warm White	10/50	2700	82	1250	12000	5.25"	2.05"
		109263	\$ 1,3,4	CFL20/41	Cool White	10/50	4100	82	1250	12000	5.25"	2.05"
		109274	\$ 1,3,4	CFL20/50	Natural White	10/50	5000	82	1250	12000	5.25"	2.05"
23 WATT												
T2	Med.	45075	\$ 1,3,4	CFL23/27/T2	Warm White	10/50	2700	82	1600	10000	4.92"	2.13"
		46620	X \$ 1,3,4	CFL23/27/FS	Warm White	10/50	2700	82	1600	12000	4.65"	2.28"
		45077	\$ 1,3,4	CFL23/41/T2	Cool White	10/50	4100	82	1600	10000	4.92"	2.13"
		45079	\$ 1,3,4	CFL23/50/T2	Natural White	10/50	5000	82	1600	10000	4.92"	2.13"
	GU24	46518	\$ 1,3,4	CFL23/27/GU24	Warm White	10/50	2700	82	1600	10000	4.41"	2.13"
		46522	\$ 1,3,4	CFL23/35/GU24	White	10/50	3500	82	1600	10000	4.41"	2.13"
		46523	\$ 1,3,4	CFL23/41/GU24	Cool White	10/50	4100	82	1600	10000	4.41"	2.13"
		46524	\$ 1,3,4	CFL23/50/GU24	Natural White	10/50	5000	82	1600	10000	4.41"	2.13"
T3	Med.	45250	\$ 1,3,4	CFL23/27	Warm White	10/50	2700	82	1600	10000	5.04"	2.05"
		46334	\$ 4,5,6,8	CFL23/27/DIM	Warm White Dimmable	10/50	2700	82	1600	10000	5.59"	2.13"
		45252	\$ 1,3,4	CFL23/35	White	10/50	3500	82	1600	10000	5.04"	2.05"
		45253	\$ 1,3,4	CFL23/41	Cool White	10/50	4100	82	1600	10000	5.04"	2.05"
		45254	\$ 1,3,4	CFL23/50	Natural White	10/50	5000	82	1600	10000	5.04"	2.05"
		GU24	46548	\$ 3,5,6	CFL23/27/GU24/DIM	Warm White Dimmable	10/50	2700	82	1600	10000	4.73"
	26 WATT											
T3	GU24	46528	\$ 1,3,4	CFL26/27/GU24	Warm White	10/50	2700	82	1750	10000	5.20"	2.13"
		46531	\$ 1,3,4	CFL26/35/GU24	White	10/50	3500	82	1750	10000	5.20"	2.13"
		46529	\$ 1,3,4	CFL26/41/GU24	Cool White	10/50	4100	82	1750	10000	5.20"	2.13"
		46530	\$ 1,3,4	CFL26/50/GU24	Natural White	10/50	5000	82	1750	10000	5.20"	2.13"
27 WATT												
T3	Med.	109310	\$ 3,4,5	CFL27/27	Warm White	10/50	2700	82	1900	10000	5.44"	2.44"
		45255	\$ 3,4,5	CFL27/35	White	10/50	3500	82	1850	10000	5.44"	2.44"
		109312	\$ 3,4,5	CFL27/41	Cool White	10/50	4100	82	1850	10000	5.44"	2.44"
		109314	\$ 3,4,5	CFL27/50	Natural White	10/50	5000	82	1750	10000	5.44"	2.44"

Compact Fluorescent lamp symbols, footnotes and abbreviations are located on pages 73-74.

COMPACT FLUORESCENT LAMPS

Self-Ballasted




Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
ProLume CFL Bare Spiral continued												
32 WATT												
T3	Med.	109316	\$ 4,5,8	CFL32/27	Warm White	10/50	2700	82	2250	8000	5.56"	2.76"
		109318	\$ 4,5,8	CFL32/41	Cool White	10/50	4100	82	2200	8000	5.56"	2.76"
		109306	\$ 4,5,8	CFL32/50	Natural White	10/50	5000	82	2200	8000	5.56"	2.76"
42 WATT												
T3	Med.	109328	\$ 4,5,8	CFL42/27	Warm White	6/24	2700	82	2900	12000	7.06"	2.83"
		109336	\$ 4,5,8	CFL42/41	Cool White	6/24	4100	82	2800	12000	7.06"	2.83"
		109338	\$ 4,5,8	CFL42/50	Natural White	6/24	5000	82	2800	12000	7.06"	2.83"
65 WATT												
T5	Med.	45600	\$ 4,5,7	CFL65/27	Warm White	1/6	2700	82	4300	10000	9.50"	3.54"
		45604	\$ 4,5,7	CFL65/50	Natural White	1/6	5000	82	4300	10000	9.50"	3.54"
85 WATT												
T5	Med.	45606	\$ 4,5,7	CFL85/27	Warm White	1/6	2700	82	5700	10000	10.00"	4.02"
		45610	\$ 4,5,7	CFL85/50	Natural White	1/6	5000	82	5700	10000	10.00"	4.02"
	Mog.	45500	\$ 4,5,7	CFL85/50/E39	Natural White	1/6	5000	82	5700	10000	10.50"	4.02"
105 WATT												
T5	Med.	45618	\$ 4,5,7	CFL105/50	Natural White	1/6	5000	82	7000	10000	10.75"	4.02"
		45502	\$ 4,5,7,9	CFL105/50/277V	Natural White 277V	1/6	5000	82	7000	10000	10.75"	4.02"
	Mog.	45614	\$ 4,5,7	CFL105/50/E39	Natural White	1/6	5000	82	7000	10000	11.25"	4.02"
		45504	\$ 4,5,7,9	CFL105/50/E39/277V	Natural White 277V	1/6	5000	82	7000	10000	11.25"	4.02"
150 WATT												
T6	EX39	47000	\$ 4,5,7	CFL150/50/EX39	Natural White	1/6	5000	82	8800	10000	13.03"	4.72"
180 WATT												
T6	EX39	47001	\$ 4,5,7	CFL180/50/EX39	Natural White	1/6	5000	82	11100	10000	14.33"	4.72"

Compact Fluorescent lamp symbols, footnotes and abbreviations are located on pages 73-74.

COMPACT FLUORESCENT LAMPS

Self-Ballasted

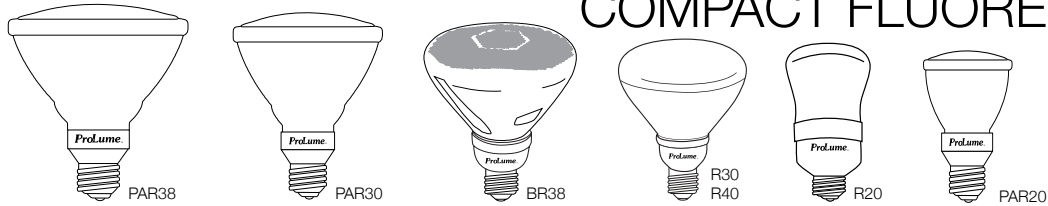


Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
ProLume CFL Reflector												
11 WATT												
PAR20	Med.	46005	\$ 2,4,8	CFL11/27/PAR20	Warm White Flood	6/24	2700	82	380	10000	3.86"	2.48"
		46006	\$ 2,4,8	CFL11/35/PAR20	White Flood	6/24	3500	82	380	10000	3.86"	2.48"
		46007	\$ 2,4,8	CFL11/41/PAR20	Cool White Flood	6/24	4100	82	380	10000	3.86"	2.48"
		46008	\$ 2,4,8	CFL11/50/PAR20	Natural White Flood	6/24	5000	82	380	10000	3.86"	2.48"
R20	GU24	46542	\$ 2,4,8	CFL11/27/R20/GU24	Warm White Flood	6/24	2700	82	340	10000	4.02"	2.50"
14 WATT												
R20	Med.	46011	\$ 4,5,8	CFL14/30/R20	Soft White Flood	6/24	3000	82	500	8000	4.94"	2.52"
		46014	\$ 4,5,8	CFL14/50/R20	Natural White Flood	6/24	5000	82	500	8000	4.94"	2.52"
15 WATT												
PAR30	Med.	46550	\$ 2,6,8	CFL15/27/PAR30/DIM	Warm White Dimmable Flood	6/24	2700	82	700	10000	4.60"	3.74"
		46001	\$ 2,4,8	CFL15/27/PAR30	Warm White Flood	6/24	2700	82	750	10000	4.60"	3.74"
		46002	\$ 2,4,8	CFL15/35/PAR30	White Flood	6/24	3500	82	750	10000	4.60"	3.74"
		46003	\$ 2,4,8	CFL15/41/PAR30	Cool White Flood	6/24	4100	82	750	10000	4.60"	3.74"
		46004	\$ 2,4,8	CFL15/50/PAR30	Natural White Flood	6/24	5000	82	750	10000	4.60"	3.74"
R30	Med.	46328	\$ 5,6,8	CFL15/27/R30/DIM	Warm White Dimmable Flood	6/24	2700	82	680	8000	6.01"	3.74"
		109056	X \$ 1,4	CFL15/BLU/R30	Blue Flood	6/24	-	82	720	8000	5.10"	3.78"
		109058	X \$ 1,4	CFL15/GRN/R30	Green Flood	6/24	-	82	720	8000	5.10"	3.78"
		109054	X \$ 1,4	CFL15/PNK/R30	Pink Flood	6/24	-	82	720	8000	5.10"	3.78"
		109062	X \$ 1,4	CFL15/YEL/R30	Yellow Flood	6/24	-	82	720	8000	5.10"	3.78"
	GU24	46538	\$ 1,4,8	CFL15/27/R30/GU24	Warm White	6/24	2700	82	750	10000	4.76"	3.74"
16 WATT												
R30	Med.	46101	\$ 4,5,8	CFL16/30/R30/ES	Soft White, Energy Saver	6/24	3000	82	750	10000	5.60"	3.78"
		46104	\$ 4,5,8	CFL16/41/R30	Cool White Flood	6/24	4100	82	750	10000	5.60"	3.78"
		46105	\$ 4,5,8	CFL16/50/R30	Natural White Flood	6/24	5000	82	750	10000	5.60"	3.78"
23 WATT												
BR38	Med.	109216	\$ 2,4,8	CFL23/30/BR38	Soft White Flood	6/24	3000	82	1300	10000	6.40"	4.72"
PAR38	Med.	46201	\$ 2,4,8	CFL23/27/PAR38	Warm White Flood	6/24	2700	82	1100	10000	5.06"	4.76"
		46202	\$ 2,4,8	CFL23/35/PAR38	White Flood	6/24	3500	82	1100	10000	5.06"	4.76"
		46203	\$ 2,4,8	CFL23/41/PAR38	Cool White Flood	6/24	4100	82	1100	10000	5.06"	4.76"
		46204	\$ 2,4,8	CFL23/50/PAR38	Natural White Flood	6/24	5000	82	1100	10000	5.06"	4.76"
R40	Med.	46329	\$ 5,6,8	CFL23/27/R40/DIM	Warm White Dimmable Flood	6/24	2700	82	1090	10000	6.97"	5.00"
		46210	\$ 4,5,8	CFL23/27/R40	Warm White Flood	6/24	2700	82	1090	10000	6.50"	5.00"
		109286	\$ 4,5,8	CFL23/30/R40	Soft White Flood	6/24	3000	82	1090	10000	6.50"	5.00"
		46206	\$ 4,5,8	CFL23/50/R40	Natural White Flood	6/24	5000	82	1090	10000	6.50"	5.00"
		46208	\$ 4,5,8	CFL23/PB/R40	Pool Bright Flood	6/24	6500	82	1000*	10000	6.50"	5.00"

*Scotopic Lumens
Compact Fluorescent lamp symbols, footnotes and abbreviations are located on pages 73-74.

COMPACT FLUORESCENT LAMPS

Self-Ballasted

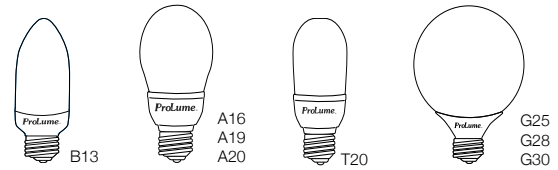


Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
ProLume CFL Decorative												
5 WATT												
A16	Med.	45730	X \$ 1,3,4	CFL5/27/A16	Warm White	10/50	2700	82	250	8000	4.07"	2.13"
		45732	X \$ 1,3,4	CFL5/41/A16	Cool White	10/50	4100	82	250	8000	4.07"	2.13"
B13	Med.	45761	X \$ 1,4,8	CFL5/30/B13	Soft White	10/50	3000	82	200	8000	4.57"	1.57"
	Cand.	45762	X \$ 1,4,8	CFL5/30/B13/E12	Soft White	10/50	3000	82	200	8000	3.86"	1.57"
9 WATT												
A16	Med.	45734	\$ 1,3,4	CFL9/27/A16	Warm White	10/50	2700	82	470	8000	4.50"	2.20"
B13	Med.	45763	\$ 1,4,8	CFL9/30/B13	Soft White	10/50	3000	82	470	8000	4.92"	1.61"
	Cand.	45764	\$ 1,4,8	CFL9/30/B13/E12	Soft White	10/50	3000	82	470	8000	4.43"	1.61"
G25	Med.	45703	† \$ 1,3,4	CFL9/27/G25/ES	Warm White	6/24	2700	82	500	10000	4.33"	3.11"
		45705	\$ 1,3,4	CFL9/50/G25	Natural White	6/24	5000	82	500	10000	4.33"	3.11"
14 WATT												
A19	Med.	45738	\$ 1,3,4	CFL14/27/A19	Warm White	10/50	2700	82	800	10000	4.63"	2.28"
		45739	\$ 1,3,4	CFL14/35/A19	White	10/50	3500	82	800	10000	4.63"	2.28"
		45740	\$ 1,3,4	CFL14/41/A19	Cool White	10/50	4100	82	800	10000	4.63"	2.28"
		45741	\$ 1,3,4	CFL14/50/A19	Natural White	10/50	5000	82	800	10000	4.63"	2.28"
T20	Med.	45755	X \$ 4,5,8	CFL14/27/T20	Warm White	6/24	2700	82	800	8000	5.44"	2.48"
		45758	\$ 4,5,8	CFL14/50/T20	Natural White	6/24	5000	82	800	8000	5.44"	2.48"
15 WATT												
A19	GU24	46540	X \$ 4,5,8	CFL15/27/A19/GU24	Warm White	6/24	2700	82	800	10000	4.82"	2.64"
G25	GU24	46536	X \$ 1,4,8	CFL15/27/G25/GU24	Warm White	6/24	2700	82	750	10000	4.80"	3.31"
G28	Med.	45713	\$ 1,3,4	CFL15/27/G28	Warm White	6/24	2700	82	850	10000	4.73"	3.73"
		45717	\$ 1,3,4	CFL15/50/G28	Natural White	6/24	5000	82	850	10000	4.73"	3.73"
16 WATT												
G30	Med.	45725	\$ 4,5,8	CFL16/27/G30	Warm White	6/24	2700	82	900	10000	5.07"	3.70"
		46533	\$ 4,5,8	CFL16/50/G30	Natural White	6/24	5000	82	900	10000	5.07"	3.70"
20 WATT												
A20	Med.	45743	\$ 1,4,8	CFL20/27/A20	Warm White	6/24	2700	82	1100	8000	5.56"	2.80"

Compact Fluorescent lamp symbols, footnotes and abbreviations are located on pages 73-74.

COMPACT FLUORESCENT LAMPS

Plug-In

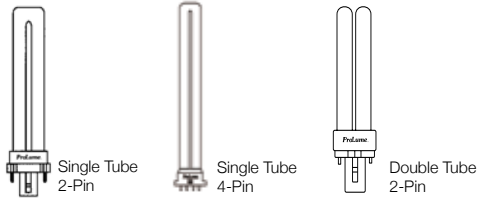


Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
ProLume Single Tube 2-Pin Eco-Shield®												
5 WATT												
T4	G23	109100	\$ 10,11	PL5S/27/ECO	Warm White	1/50	2700	82	250	12000	4.25"	-
		109102	\$ 10,11	PL5S/41/ECO	Cool White	1/50	4100	82	250	12000	4.25"	-
7 WATT												
T4	G23	109106	\$ 11	PL7S/27/ECO	Warm White	1/50	2700	82	400	12000	5.43"	-
		109107	\$ 11	PL7S/35/ECO	White	1/50	3500	82	400	12000	5.43"	-
		109108	\$ 11	PL7S/41/ECO	Cool White	1/50	4100	82	400	12000	5.43"	-
9 WATT												
T4	G23	109112	\$ 11	PL9S/27/ECO	Warm White	1/50	2700	82	600	12000	6.61"	-
		109144	\$ 11	PL9S/35/ECO	White	1/50	3500	82	600	12000	6.61"	-
		109116	\$ 11	PL9S/41/ECO	Cool White	1/50	4100	82	600	12000	6.61"	-
		109118	\$ 11	PL9S/50/ECO	Natural White	1/50	5000	82	600	12000	6.61"	-
13 WATT												
T4	GX23	109126	\$ 11	PL13S/27/ECO	Warm White	1/50	2700	82	825	12000	7.20"	-
		109128	\$ 11	PL13S/35/ECO	White	1/50	3500	82	825	12000	7.20"	-
		109130	\$ 11	PL13S/41/ECO	Cool White	1/50	4100	82	825	12000	7.20"	-
		109132	\$ 11	PL13S/50/ECO	Natural White	1/50	5000	82	825	12000	7.20"	-
ProLume Single Tube 4-Pin Eco-Shield®												
13 WATT												
T4	2GX7	109134	\$ 12,13	PL13S/E/27/ECO	Warm White	1/50	2700	82	825	12000	6.30"	-
		109136	\$ 12,13	PL13S/E/35/ECO	White	1/50	3500	82	825	12000	6.30"	-
		109138	\$ 12,13	PL13S/E/41/ECO	Cool White	1/50	4100	82	825	12000	6.30"	-
		109140	\$ 12,13	PL13S/E/50/ECO	Natural White	1/50	5000	82	825	12000	6.30"	-
ProLume Double Tube 2-Pin Eco-Shield®												
9 WATT												
T4	G23-2	109110	\$ 11	PL9D/27/ECO	Warm White	1/50	2700	82	525	12000	4.25"	-
		109120	\$ 11	PL9D/41/ECO	Cool White	1/50	4100	82	525	12000	4.25"	-
13 WATT												
T4	GX23-2	109146	\$ 11	PL13D/27/ECO	Warm White	1/50	2700	82	900	12000	4.65"	-
		109148	\$ 11	PL13D/35/ECO	White	1/50	3500	82	900	12000	4.65"	-
		109150	\$ 11	PL13D/41/ECO	Cool White	1/50	4100	82	900	12000	4.65"	-
		109149	\$ 11	PL13D/50/ECO	Natural White	1/50	5000	82	900	12000	4.65"	-
18 WATT												
T4	G24d-2	109152	\$ 11	PL18D/27/ECO	Warm White	1/50	2700	82	1200	12000	6.02"	-
		109154	\$ 11	PL18D/35/ECO	White	1/50	3500	82	1200	12000	6.02"	-
		109156	\$ 11	PL18D/41/ECO	Cool White	1/50	4100	82	1200	12000	6.02"	-
		109159	X \$ 11	PL18D/50/ECO	Natural White	1/50	5000	82	1200	12000	6.02"	-

Compact Fluorescent lamp symbols, footnotes and abbreviations are located on pages 73-74.


COMPACT FLUORESCENT LAMPS

Plug-In



Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
ProLume Double Tube 2-Pin continued												
22 WATT												
T5	GX32d-2	109862	\$ 11	PL22D/28	Warm White 15mm Cluster	1/50	2800	82	1200	10000	6.15"	-
		109864	\$ 11	PL22D/50	Natural White 15mm Cluster	1/50	5000	82	1200	10000	6.15"	-
26 WATT												
T5	G24d-3	109158	\$ 11	PL26D/27/ECO	Warm White	1/50	2700	82	1800	12000	6.77"	-
		109160	\$ 11	PL26D/35/ECO	White	1/50	3500	82	1800	12000	6.77"	-
		109162	\$ 11	PL26D/41/ECO	Cool White	1/50	4100	82	1800	12000	6.77"	-
		109163	\$ 11	PL26D/50/ECO	Natural White	1/50	5000	82	1800	12000	6.77"	-
28 WATT												
T5	GX32d-3	109870	\$ 11	PL28D/28	Warm White 15mm Cluster	1/50	2800	82	1800	12000	6.60"	-
		109868	\$ 11	PL28D/50	Natural White 15mm Cluster	1/50	5000	82	1800	12000	6.60"	-
ProLume Double Tube 4-Pin Electronic Eco-Shield®												
13 WATT												
T4	G24q-1	109037	\$ 12,13	PL13D/E/27/ECO	Warm White	1/50	2700	82	900	15000	5.16"	-
		109035	\$ 12,13	PL13D/E/30/ECO	Soft White	1/50	3000	82	900	15000	5.16"	-
		109038	\$ 12,13	PL13D/E/35/ECO	White	1/50	3500	82	900	15000	5.16"	-
		109039	\$ 12,13	PL13D/E/41/ECO	Cool White	1/50	4100	82	900	15000	5.16"	-
		109122	\$ 12,13	PL13D/E/50/ECO	Natural White	1/50	5000	82	900	15000	5.16"	-
18 WATT												
T4	G24q-2	109010	\$ 12,13	PL18D/E/27/ECO	Warm White	1/50	2700	82	1200	15000	5.75"	-
		109012	\$ 12,13	PL18D/E/35/ECO	White	1/50	3500	82	1200	15000	5.75"	-
		109013	\$ 12,13	PL18D/E/41/ECO	Cool White	1/50	4100	82	1200	15000	5.75"	-
		109074	\$ 12,13	PL18D/E/50/ECO	Natural White	1/50	5000	82	1200	15000	5.75"	-
26 WATT												
T4	G24q-3	109090	\$ 12,13	PL26D/E/27/ECO	Warm White	1/50	2700	82	1800	15000	6.57"	-
		109092	\$ 12,13	PL26D/E/35/ECO	White	1/50	3500	82	1800	15000	6.57"	-
		109094	\$ 12,13	PL26D/E/41/ECO	Cool White	1/50	4100	82	1800	15000	6.57"	-
		109096	\$ 12,13	PL26D/E/50/ECO	Natural White	1/50	5000	82	1800	15000	6.57"	-
ProLume Triple Tube 4-Pin Electronic Eco-Shield®												
18 WATT												
T4	GX24q-2	44800	\$ 12,13	PL18T/E/27/ECO	Warm White	1/50	2700	82	1200	15000	4.57"	-
		44801	\$ 12,13	PL18T/E/35/ECO	White	1/50	3500	82	1200	15000	4.57"	-
		44803	\$ 12,13	PL18T/E/41/ECO	Cool White	1/50	4100	82	1200	15000	4.57"	-
		44804	X \$ 12,13	PL18T/E/50/ECO	Natural White	1/50	5000	82	1200	15000	4.57"	-

Compact Fluorescent lamp symbols, footnotes and abbreviations are located on pages 73-74.



COMPACT FLUORESCENT LAMPS


Plug-In

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
ProLume Triple Tube 4-Pin Electronic Eco-Shield® continued												
26 WATT												
T4	GX24q-3	109020	Shield \$ 12,13	PL26T/E/27/ECO	Warm White	1/50	2700	82	1800	15000	5.28"	-
		109022	Shield \$ 12,13	PL26T/E/35/ECO	White	1/50	3500	82	1800	15000	5.28"	-
		109024	Shield \$ 12,13	PL26T/E/41/ECO	Cool White	1/50	4100	82	1800	15000	5.28"	-
		109076	Shield \$ 12,13	PL26T/E/50/ECO	Natural White	1/50	5000	82	1800	15000	5.28"	-
32 WATT												
T4	GX24q-3	109026	Shield \$ 12,13	PL32T/E/27/ECO	Warm White	1/50	2700	82	2400	15000	5.79"	-
		109028	Shield \$ 12,13	PL32T/E/35/ECO	White	1/50	3500	82	2400	15000	5.79"	-
		109030	Shield \$ 12,13	PL32T/E/41/ECO	Cool White	1/50	4100	82	2400	15000	5.79"	-
		109070	Shield \$ 12,13	PL32T/E/50/ECO	Natural White	1/50	5000	82	2400	15000	5.79"	-
42 WATT												
T4	GX24q-4	109032	Shield \$ 12,13	PL42T/E/27/ECO	Warm White	1/50	2700	82	3200	15000	6.61"	-
		109034	Shield \$ 12,13	PL42T/E/35/ECO	White	1/50	3500	82	3200	15000	6.61"	-
		109036	Shield \$ 12,13	PL42T/E/41/ECO	Cool White	1/50	4100	82	3200	15000	6.61"	-
		109072	Shield \$ 12,13	PL42T/E/50/ECO	Natural White	1/50	5000	82	3200	15000	6.61"	-
57 WATT												
T4	GX24q-5	44806	Shield X \$ 12,13	PL57T/E/27/ECO	Warm White	1/50	2700	82	4200	12000	7.57"	-
		44807	Shield \$ 12,13	PL57T/E/41/ECO	Cool White	1/50	4100	82	4200	12000	7.57"	-
		44808	Shield \$ 12,13	PL57T/E/50/ECO	Natural White	1/50	5000	82	4200	12000	7.57"	-

Compact Fluorescent lamp symbols, footnotes and abbreviations are located on pages 73-74.

COMPACT FLUORESCENT LAMPS

Plug-In



Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Avg. Life	MOL	MOD
ProLume. High Lumen Long 4-Pin												
18 WATT												
T5	2G11	109700	\$ 13	PLL18/835/ECO	White	10/40	3500	82	1250	12000	8.94"	-
		109702	\$ 13	PLL18/841/ECO	Cool White	10/40	4100	82	1250	12000	8.94"	-
24 WATT												
T5	2G11	109704	\$ 13	PLL24/835/ECO	White	10/40	3500	82	1800	12000	12.70"	-
		109706	\$ 13	PLL24/841/ECO	Cool White	10/40	4100	82	1800	12000	12.70"	-
36 WATT												
T5	2G11	109708	\$ 13	PLL36/835/ECO	White	10/40	3500	82	2800	12000	16.45"	-
		109710	\$ 13	PLL36/841/ECO	Cool White	10/40	4100	82	2800	12000	16.45"	-
40 WATT												
T5	2G11	109712	\$ 13	PLL40/830/RS/ECO	Soft White	10/40	3000	82	3150	20000	22.50"	-
		109714	\$ 13	PLL40/835/RS/ECO	White	10/40	3500	82	3150	20000	22.50"	-
		109716	\$ 13	PLL40/841/RS/ECO	Cool White	10/40	4100	82	3150	20000	22.50"	-
		44900	\$ 13	PLL40/850/RS/ECO	Natural White	10/40	5000	82	3150	20000	22.50"	-
55 WATT												
T5	2G11	109718	\$ 13	PLL55/835/ECO	White	10/40	3500	82	4700	12000	21.20"	-
		109720	\$ 13	PLL55/841/ECO	Cool White	10/40	4100	82	4700	12000	21.20"	-
ProLume. Flat Quad 4-Pin Electronic												
27 WATT												
T5	GX10q-2	109238	\$ 13	FML27/NDL	Natural White	1/50	5000	82	1700	10000	5.90"	3.23"

Compact Fluorescent lamp symbols, footnotes and abbreviations are located on pages 73-74.

COMPACT FLUORESCENT LAMPS

Bulb and Base Identification Guide

Bulb Shapes




Single Tube
2-Pin




Single Tube
4-Pin




Double Tube
2-Pin/4-Pin



Triple Tube
4-Pin




Flat Quad
4-Pin



Double
15mm




PLL
4-Pin



BR38



R20




R30/R40




Plug-In R40




A-Shape




G
Globe



PAR20



PAR30



PAR38



B13
Torpedo



Spiral
GU24



TS EX39




Spiral




T20
Tubular


Base Types




G23



GX23



GX23-2




G24q-1




G24q-2




G24q-3




G24d-2



GU24




GX24q-3




GX24q-4




GX24q-5




GX24d-3




2G11



2GX7



Medium
E26/27



E12



EX39

COMPACT FLUORESCENT LAMPS

Cross Reference Guide

HALCO	G.E.	PHILIPS	OSRAM/SYLVANIA
Single Tube 2-Pin			
PL5S/27/ECO	F5BX/827/ECO	PL-S 5W/827/2P/ALTO	CF5DS/827
PL5S/41/ECO	F5BX/841/ECO	PL-S 5W/841/2P/ALTO	CF5DS/841
PL7S/27/ECO	F7BX/827/ECO	PL-S 7W/827/2P/ALTO	CF7DS/827
PL7S/35/ECO	F7BX/835/ECO	PL-S 7W/835/2P/ALTO	CF7DS/835
PL7S/41/ECO	F7BX/841/ECO	PL-S 7W/841/2P/ALTO	CF7DS/841
PL9S/27/ECO	F9BX/827/ECO	PL-S 9W/827/2P/ALTO	CF9DS/827
PL9S/35/ECO	F9BX/835/ECO	PL-S 9W/835/2P/ALTO	CF9DS/835
PL9S/41/ECO	F9BX/841/ECO	PL-S 9W/841/2P/ALTO	CF9DS/841
PL9S/50/ECO	-	PL-S 9W/850/2P/ALTO	CF9DS/850
PL13S/27/ECO	F13BX/827/ECO	PL-S 13W/827/2P/ALTO	CF13DS/827
PL13S/35/ECO	F13BX/835/ECO	PL-S 13W/835/2P/ALTO	CF13DS/835
PL13S/41/ECO	F13BX/841/ECO	PL-S 13W/841/2P/ALTO	CF13DS/841
PL13S/50/ECO	F13BX/850/ECO	PL-S 13W/850/2P/ALTO	CF13DS/850
Double Tube 2-Pin			
PL9D/27/ECO	F9DBX23/827/ECO	-	CF9DD/827
PL9D/41/ECO	F9DBX23/841/ECO	-	CF9DD/841
PL13D/27/ECO	F13DBX23/827/ECO	PL-C 13W/827/USA/ALTO	CF13DD/827
PL13D/35/ECO	F13DBX23/835/ECO	PL-C 13W/835/USA/ALTO	CF13DD/835
PL13D/41/ECO	F13DBX23/841/ECO	PL-C 13W/841/USA/ALTO	CF13DD/841
PL13D/50/ECO	-	-	-
PL18D/27/ECO	F18DBX/827/ECO	PL-C 18W/827/ALTO	CF18DD/827
PL18D/35/ECO	F18DBX/835/ECO	PL-C 18W/835/ALTO	CF18DD/835
PL18D/41/ECO	F18DBX/841/ECO	PL-C 18W/841/ALTO	CF18DD/841
PL18D/50/ECO	-	-	-
PL26D/27/ECO	F26DBX/827/ECO	PL-C 26W/827/ALTO	CF26DD/827
PL26D/35/ECO	F26DBX/835/ECO	PL-C 26W/835/ALTO	CF26DD/835
PL26D/41/ECO	F26DBX/841/ECO	PL-C 26W/841/ALTO	CF26DD/841
PL26D/50/ECO	-	-	-
PL22D/28	-	PL-C 15MM/22W/827	-
PL22D/50	-	-	-
PL28D/28	-	PL-C 15MM/28W/827	-
PL28D/50	-	-	-
Single Tube 4-Pin Electronic			
PL13S/E/27/ECO	-	-	CF13DS/E/827
PL13S/E/35/ECO	-	-	-
PL13S/E/41/ECO	-	-	CF13DS/E/841
PL13S/E/50/ECO	-	-	-

COMPACT FLUORESCENT LAMPS

Cross Reference Guide

HALCO	G.E.	PHILIPS	OSRAM/SYLVANIA
Double Tube 4-Pin Electronic			
PL13D/E/27/ECO	F13DBX/827/ECO4P	PL-C 13W/827/4P/ALTO	CF13DD/E/827
PL13D/E/30/ECO	F13DBX/830/ECO4P	PL-C 13W/830/4P/ALTO	CF13DD/E/830
PL13D/E/35/ECO	F13DBX/835/ECO4P	PL-C 13W/835/4P/ALTO	CF13DD/E/835
PL13D/E/41/ECO	F13DBX/841/ECO4P	PL-C 13W/841/4P/ALTO	CF13DD/E/841
PL13D/E/50/ECO	-	-	-
PL18D/E/27/ECO	F18DBX/827/ECO4P	PL-C 18W/827/4P/ALTO	CF18DD/E/827
PL18D/E/35/ECO	F18DBX/835/ECO4P	PL-C 18W/835/4P/ALTO	CF18DD/E/835
PL18D/E/41/ECO	F18DBX/841/ECO4P	PL-C 18W/841/4P/ALTO	CF18DD/E/841
PL18D/E/50/ECO	-	-	-
PL26D/E/27/ECO	F26DBX/827/ECO4P	PL-C 26W/827/4P/ALTO	CF26DD/E/827
PL26D/E/35/ECO	F26DBX/835/ECO4P	PL-C 26W/835/4P/ALTO	CF26DD/E/835
PL26D/E/41/ECO	F26DBX/841/ECO4P	PL-C 26W/841/4P/ALTO	CF26DD/E/841
PL26D/E/50/ECO	-	-	-
Triple Tube 4-Pin Electronic			
PL18T/E/27/ECO	F18TBX/827/A/ECO	PL-T 18W/827/4P/ALTO	CF18DT/E/IN/827
PL18T/E/35/ECO	F18TBX/835/A/ECO	PL-T 18W/835/4P/ALTO	CF18DT/E/IN/835
PL18T/E/41/ECO	F18TBX/841/A/ECO	PL-T 18W/841/4P/ALTO	CF18DT/E/IN/841
PL18T/E/50/ECO	-	-	-
PL26T/E/27/ECO	F26TBX/827/A/ECO	PL-T 26W/827/4P/ALTO	CF26DT/E/IN/827
PL26T/E/35/ECO	F26TBX/835/A/ECO	PL-T 26W/835/4P/ALTO	CF26DT/E/IN/835
PL26T/E/41/ECO	F26TBX/841/A/ECO	FL-T 26W/841/4P/ALTO	CF26DT/E/IN/841
PL26T/E/50/ECO	-	-	-
PL32T/E/27/ECO	F32TBX/827/A/ECO	PL-T 32W/827/4P/ALTO	CF32DT/E/IN/827
PL32T/E/35/ECO	F32TBX/835/A/ECO	PL-T 32W/835/4P/ALTO	CF32DT/E/IN/835
PL32T/E/41/ECO	F32TBX/841/A/ECO	PL-T 32W/841/4P/ALTO	CF32DT/E/IN/841
PL32T/E/50/ECO	-	-	-
PL42T/E/27/ECO	F42TBX/827/A/ECO	PL-T 42W/827/4P/ALTO	CF42DT/E/IN/827
PL42T/E/35/ECO	F42TBX/835/A/ECO	PL-T 42W/835/4P/ALTO	CF42DT/E/IN/835
PL42T/E/41/ECO	F42TBX/841/A/ECO	PL-T 42W/841/4P/ALTO	CF42DT/E/IN/841
PL42T/E/50/ECO	-	-	-
PL57T/E/27/ECO	F57QBX/827/A/ECO	-	CF57DT/E/IN/827
PL57T/E/41/ECO	F57QBX/841/A/ECO	PL-T 57W/841/4P/A	CF57DT/E/IN/841
PL57T/E/50/ECO	F57QBX/850/A/ECO	-	CF57DT/E/IN/850

COMPACT FLUORESCENT LAMPS


Cross Reference Guide

HALCO	G.E.	PHILIPS	OSRAM/SYLVANIA
High Lumen Long 4-Pin			
PLL18/835/ECO	F18BX/SPX35	PL-L 18W/835/4P	FT18DL/835/RS
PLL18/841/ECO	F18BX/SPX41	PL-L 18W/841/4P	FT18DL/841/RS
PLL24/835/ECO	F27BX/SPX35/RS	PL-L 24W/835/4P	FT24DL/835
PLL24/841/ECO	F27BX/SPX41/RS	PL-L 24W/841/4P	FT24DL/841
PLL36/835/ECO	F39BX/SPX35/RS	PL-L 36W/835/4P	FT36DL/835
PLL36/841/ECO	F39BX/SPX41/RS	PL-L 36W/841/4P	FT36DL/841
PLL40/830/RS/ECO	F40/30BX/SPX30	PL-L 40W/830/4P/RS/IS	FT40DL/830/RS
PLL40/835/RS/ECO	F40/30BX/SPX35	PL-L 40W/835/4P/RS/IS	FT40DL/835/RS
PLL40/841/RS/ECO	F40/30BX/SPX41	PL-L 40W/841/4P/RS/IS	FT40DL/841/RS
PLL40/850/RS/ECO	F40/30BX/SPX50	-	FT40DL/850/RS
PLL55/835/ECO	F55BX/835	PL-L 50W/835/4P/RS	FT55DL/835
PLL55/841/ECO	F55BX/840	PL-L 50W/841/4P/RS	FT55DL/841

COMPACT FLUORESCENT LAMPS

Symbols, Footnotes and Abbreviations

SYMBOLS

\$	Energy saving product.
	ProLume® Eco-Shield® Low-Mercury Fluorescent lamps pass the Federal TCLP for hazardous wastes.
†	New product introduced within the past year.
X	Product will be discontinued when inventory is depleted.

FOOTNOTES

1	UL approved for damp location in base-up position only. All other base positions must be in a dry environment or in a weatherproof fixture.
2	UL approved for wet location in base-up position only. All other base positions must be in a dry environment or in a weatherproof fixture.
3	UL approved for totally enclosed fixtures with a max ballast case temperature of 90°C for GU24 base, 75°C for medium base lamps.
4	Not intended for use with emergency exit fixtures, dimmers, timing devices, photo sensors or occupancy sensors.
5	Do not use where lamp is exposed to moisture.
6	For use on analog dimmers only - may not be compatible with all dimmers.
7	Do not use in totally enclosed fixtures or in recessed fixtures.
8	Do not use in totally enclosed fixtures or insulated contact air tight (ICAT) rated fixtures.
9	Use only on 277 Volts, 60-hertz frequency.
10	PL 5 watt lamps should not be used in socket or adapters rated for 7 or 9 watt lamps.
11	Total wattage consumption for adapter systems is higher than lamp wattage due to ballast losses. Total system wattage equals lamp wattage plus 2 ballast watts.
12	This 4-Pin Electronic lamp has an internal end-of-life (EOL) mechanism that shuts the lamp down to prevent abnormal end-of-life failure.
13	Operate this lamp on a high-frequency Compact Fluorescent ballast with an end-of-life shut down circuit.

COMPACT FLUORESCENT LAMPS

Symbols, Footnotes and Abbreviations

ABBREVIATIONS

/27	Suffix used to indicate color temperature of 2700K.
/30	Suffix used to indicate color temperature of 3000K.
/35	Suffix used to indicate color temperature of 3500K.
/3WAY	Suffix used to indicate 3-Way lamps.
/41	Suffix used to indicate color temperature of 4100K.
/4PK	Suffix used to indicate a package of (4) Compact Fluorescent lamps.
/50	Suffix used to indicate color temperature of 5000K.
/65	Suffix used to indicate color temperature of 6500K.
BLB	Code abbreviation for Blacklight-Blue lamps.
CFL	Code abbreviation for ProLume® Self-Ballasted Compact Fluorescent lamps.
BLU	Code abbreviation for Blue lamps.
/CS	Suffix used to indicate CoverShield® safety coated lamps.
D	Code abbreviation for Double Tube lamps.
/DIM	Suffix used to indicate Dimmable lamps.
/E	Suffix used to indicate Electronic 4-Pin Plug-In lamps.
/ECO	Suffix used to indicate Eco-Shield® TCLP compliant lamps.
GRN	Code abbreviation for Green lamps.
/PB	Suffix used to indicate Pool Bright pool lamps color temperature of 6450K.
PL	Code abbreviation for ProLume® Plug-In Compact Fluorescent lamps.
PLL	Code abbreviation for ProLume® Plug-In High Lumen long lamps.
PNK	Code abbreviation for Pink lamps.
S	Code abbreviation for Single Tube Plug-In lamps.
SP	Code abbreviation for Spiral Tube Plug-In lamps.
T	Code abbreviation for Triple Tube Plug-In lamps.
YEL	Code abbreviation for Yellow lamps.