

## LED Luminaires

### ProLED SekTor Area Light Series G2

- Lumen Packages Covering 9,400-45,000 Lumens
- Field-interchangeable Optics & Selectable CCT and Lumen Output
- Integrated Z-10 Receptacle for Control Solution
- Toolless Entry Design For Quick Lens Change & Easier Maintenance

### Specifications

#### Description

The SekTor Area Light is a highly versatile and performance-driven outdoor luminaire designed to meet a wide range of site lighting applications. Featuring field-interchangeable optics, it allows seamless distribution changes between Type II, III, IV, and V, along with lumen and CCT selectability to accommodate varied project needs. Equipped with a built-in Zhaga Z-10 receptacle, the SekTor enables flexible integration with plug-and-play blue-tooth controls or standalone sensor solutions, supporting advanced lighting controls and energy savings. Its heavy-duty, die-cast aluminum housing is engineered for optimal heat dissipation and long-term durability. The tool-less entry door frame enhances serviceability and supports sustainable maintenance practices. With a wide selection of installer-friendly mounting options and hundreds of configurable combinations, the SekTor Area Light delivers reliable, adaptable performance for virtually any outdoor lighting environment.

#### Performance

- Lumen Selectable 9,400/12,000/15,000 - 15,000/18,000/22,000 - 22,000/28,000/31,000 - 31,000/38,000/45,000
- Selectable Color Temperatures 3000K, 4000K, 5000K
- Field-interchangeable optics, Type III installed, Type V included. Type II and Type IV lenses sold separately.
- Up to 160 Lumens per Watt
- 80+ CRI
- L70 Lumen Maintenance > 100,000 Hours
- 5 Year Limited Warranty
- 120-277VAC Standard, 277-480VAC Option

#### Construction

- Die-cast aluminum housing with powder-coat finish
- Tool less housing and door access for easier maintenance
- Compact lightweight design with low EPA rating
- High efficiency polycarbonate total internal reflection (TIR) optics
- Mounts are sold Separately



#### Applications

- General outdoor area & site lighting
- Auto dealerships
- Parking lot
- Roadway
- Security lighting
- Campuses

#### Certifications

- DLC 5.1 Premium
- cULus
- IP65, UL Wet location
- ANSI 3G vibration
- FCC
- RoHS compliant

#### Controls

- 0-10 VDC dimming
- 3PR Receptacle (Photocell Sold Separately)
- Zhaga Z-10 receptacle for Bluetooth control solutions

## Product Description Ordering Logic EX: SAL-200-T3-40-U-7PR

Series	Size	Lumen Selectable	Color Selectable	Distribution Type	Voltage	Color	Surge Protector	Options Lighting Controls
SAL2	1 = 60W-80W-100W 2 = 100W-120W-150W 3 = 150W-180W-200W 4 = 200W-250W-300W	<b>LS = Lumen Selectable</b> 1 = 9,400-12,000-15,000 Lumens 2 = 15,000-18,000-22,000 Lumens 3 = 22,000-28,200-31,000 Lumens 4 = 31,000-38,000-45,000 Lumens	<b>CS =</b> 3000K-4000K-5000K	<b>T35X =</b> Type III Factory Installed, (Type V in box)	<b>U =</b> 120-277VAC <b>H =</b> 277-480VAC (2)	<b>BZ = Bronze</b> <b>WH = White</b> (1)	<b>Blank =</b> 10kv Surge Protector	<b>Blank =</b> 3 Pin Receptacle w/ Shorting Cap, Z10 Receptacle w/ Cap <b>7PR =</b> 7 Pin Receptacle w/ Shorting Cap, Z10 Receptacle w/ Cap (2)

Footnote 1 - White fixture only available with SAL2-2 and SAL2-4 Footnote 2 - For options and non-stock items - lead times apply Footnote 3 - Mounting ordered separately

## Ordering Information

Product SKU	Product Code	Product Description
<b>Stock Fixtures</b>		
25400	SAL2-1-LS-CS-T35X-U-BZ	Sektor Area Light G2 Lumen Selectable (9,400/12,000/15,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable (3000K-4000K-5000K), 120-277VAC, Bronze, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KVA Surge Protection(60-80-100W)
25401	SAL2-2-LS-CS-T35X-U-BZ	Sektor Area Light G2 Lumen Selectable (15,000/18,000/22,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable (3000K-4000K-5000K), 120-277VAC, Bronze, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, , 10KVA Surge Protection,(100-120-150W)
25402	SAL2-3-LS-CS-T35X-U-BZ	Sektor Area Light G2 Lumen Selectable (22,000/28,000/31,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable (3000K-4000K-5000K), 120-277VAC, Bronze, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KVA Surge Protection, (150-180-200W)
25403	SAL2-4-LS-CS-T35X-U-BZ	Sektor Area Light G2 Lumen Selectable (31,000/38,000/45,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable(3000K-4000K-5000K), 120-277VAC, Bronze, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KV Surge Protection (200-250-300W)
25404	SAL2-2-LS-CS-T35X-U-WH	Sektor Area Light G2 Lumen Selectable (15,000/18,000/22,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable (3000K-4000K-5000K), 120-277VAC, White, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KVA Surge Protection, (100-120-150W)
25405	SAL2-4-LS-CS-T35X-U-WH	Sektor Area Light G2 Lumen Selectable (31,000/38,000/45,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable (3000K-4000K-5000K), 120-277VAC, White, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KVA Surge Protection, (200-250-300W)
<b>Made-to-Order Non Stocking SKUs</b>		
25500	SAL2-1-LS-CS-T35X-H-BZ	Sektor Area Light G2 High Voltage Lumen Selectable (9,400/12,000/15,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable (3000K-4000K-5000K), 277-480VAC, Bronze, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KVA HV Surge Protection, (60-80-100W)
25501	SAL2-2-LS-CS-T35X-H-BZ	Sektor Area Light G2 High Voltage Lumen Selectable (15,000/18,000/22,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable (3000K-4000K-5000K), 277-480VAC, Bronze, 3 Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KVA HV Surge Protection, (100-120-150W)
25502	SAL2-3-LS-CS-T35X-H-BZ	Sektor Area Light G2 High Voltage Lumen Selectable (22,000/28,000/31,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable (3000K-4000K-5000K), 277-480VAC, Bronze, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KVA HV Surge Protection, (150-180-200W)
25503	SAL2-4-LS-CS-T35X-H-BZ	Sektor Area Light G2 High Voltage Lumen Selectable (31,000/38,000/45,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable(3000K-4000K-5000K), 277-480VAC, Bronze, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KVA HV Surge Protection (200-250-300W)

## Ordering Information Continued

Product SKU	Product Code	Product Description
25504	SAL2-2-LS-CS-T35X-H-WH	Sektor Area Light G2 High Voltage Lumen Selectable (15,000/18,000/22,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable (3000K-4000K-5000K), 277-480VAC, White, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KVA HV Surge Protection, (100-120-150W)
25505	SAL2-4-LS-CS-T35X-H-WH	Sektor Area Light G2 High Voltage Lumen Selectable (31,000/38,000/45,000), Field Adjustable Type 3 (Installed) and 5 Lens, Color Selectable (3000K-4000K-5000K), 277-480VAC, White, 3-Pin Receptacle with Shorting Cap, and Z10 Sensor Base with Cover, 10KVA HV Surge Protection, (200-250-300W)

## Accessory Ordering Information

Product SKU	Product Code	Product Description
<b>Mounting Arms</b>		
24870	SEK-SF	SekTor Slipfit Knuckle Mount, Bronze, (for 100W-300W Product)
24988	SEK-SF-S	SekTor Slipfit Knuckle Mount, Bronze (for SAL2 Area Light only 100W-150W Product)
24871	SEK-QM	SekTor Straight Arm Quick Mount, Bronze (for 100W-300W Product)
24872	SEK-TR	SekTor Trunnion Mount, Bronze (for 100W-300W Product)
24908	SEK-PM	SekTor Adjustable Universal Pole Mount, Bronze (for 100W-300W Product)
24984	SEK-SF-WH	SekTor Slipfit Knuckle Mount, White (for 100W-300W Product)
24989	SEK-SF-S-WH	SekTor Slipfit Knuckle Mount, White (for SAL2 Area Light only 100W-150W Product)
24985	SEK-QM-WH	SekTor Straight Arm Quick Mount, White (for 100W-300W Product)
24986	SEK-TR-WH	SekTor Trunnion Mount, White (for 100W-300W Product)
24987	SEK-PM-WH	SekTor Adjustable Universal Pole Mount, White (for 100W-300W Product)
<b>Shields &amp; Lens</b>		
24969	SAL2-BLS-BZ-S	Sektor Area G2 Backlight Shield (Small 100W-150W Product), Bronze
24970	SAL2-BLS-BZ-L	Sektor Area G2 Backlight Shield (Large 200W-300W Product), Bronze
24971	SAL2-SS-BZ-S	Sektor Area G2 Side Shield (Small 100W-150W Product), Bronze
24972	SAL2-SS-BZ-L	Sektor Area G2 Side Shield (Large 200W-300W Product), Bronze
24973	SAL2-BLS-WH-S	Sektor Area G2 Backlight Shield (Small 100W-150W Product), White
24974	SAL2-BLS-WH-L	Sektor Area G2 Backlight Shield (Large 200W-300W Product), White
24976	SAL2-SS-WH-S	Sektor Area G2 Side Shield (Small 100W-150W Product), White
24977	SAL2-SS-WH-L	Sektor Area G2 Side Shield (Large 200W-300W Product), White
24961	SAL2-LENS-T2-T4-S	Sektor Area G2 Lens Pair 100W-150W (one Type 2 & one Type 4 Lens included)
24962	SAL2-LENS-T2-T4-L	Sektor Area G2 Lens Pair 200W-300W (one Type 2 & one Type 4 Lens included)

## Accessory Ordering Information Continued

Product SKU	Product Code	Product Description
<b>Bluetooth Sensors / Controllers *COMING SOON - Q1 2026*</b>		
25412	SAL2-PIR-PSC-ZKV-I-Z10	TruBlu Mesh Passive Infrared Outdoor Sensor-Controller Bronze (can not be used with 3PR or 7PR Twistlock Sensor)
25413	SAL2-CNTL	TruBlu Wireless Fixture Controller with Quick Connector Bronze, Z10 0-10V Base and Controller/Node
25414	SAL2-CNTL-BLU	TruBlu Mesh 0-10V Outdoor Controller with Long Range Antenna
25416	SAL2-PIR-PSC-ZKV-I-Z10-WH	TruBlu Mesh Passive Infrared Outdoor Sensor-Controller White (can not be used with 3PR or 7PR Twistlock Sensor)
25417	SAL2-CNTL-WH	TruBlu Wireless Fixture Controller with Quick Connector White, Z10 0-10V Base and Controller/Node
<b>Standalone PIR Sensors</b>		
24981	HSN-SEN-PIR-DAY-010-Z10-BZ	Haisen PIR Sensor Indoor/Outdoor Wet Location Rated, Bronze Housing, Z10 base Compatible, Daylight Harvesting, 0-10V Dimming, Remote 90555 and/or Dial Quick Setting Option (for Area Lights, Highbays, Floods)
24982	HSN-SEN-PIR-DAY-010-Z10-WH	Haisen PIR Sensor Indoor/Outdoor Wet Location Rated, White Housing, Zhaga18 or Z10 base Compatible, Daylight Harvesting, 0-10V Dimming, Remote 24983 and/or Dial Quick Setting Option (For Area Lights, Highbays, Floods)
90555	HSN-REMCON-HD06R	Haisen Remote Control for Standalone PIR and Microwave Sensors (Halco 24981, 24982, 30291, 90550, 28083)
30292	LHB-MS-RC	PIR and Microwave Motion Control Sensor Remote for Programming #90550, #90552, #30291 (While Supplies Last)
<b>Photocells</b>		
24997	SEK-PC-3PR	Sektor 3-Pin Photocell Twist Lock 120 277VAC (LT124B-NC) for G2 Area Light & Flood (3 standard wires)
24998	SEK-PC-3PR-HV	Sektor 3-Pin HV Photocell Twist Lock 480VAC (LT153E-NC) for G2 Area Light & Flood (3 standard wires)
24980	SEK-7PR	Sektor 7PR (7-Pin) Receptacle & Shorting Cap (for Sektor Area Lights and Floods) Twist Lock with 4 Contactors

## Product Selector Guide

### Halco Area Lights – Gen 2

Image	Color	Base Part	Lumens	Watts	Color Temp	Distribution Lens Type	Included Features	High Voltage	Included Features
	Dark Bronze	25400	9400-15000Lum	60-80-100W	3000K, 4000K or 5000K	Type 3 & 5 Included	3-pin Receptacle, Z10 Sensor Base, 10 KVA Surge Protection	25500	3-pin Receptacle, Z10 Sensor Base, 10 KVA Surge Protection
		25401	15000-22000Lum	100-120-150W				25501	
		25402	22000-31000Lum	150-180-200W				25502	
		25403	31000-45000Lum	200-250-300W				25503	
	White	25404	15000-22000Lum	100-120-150W	3000K, 4000K or 5000K	Type 3 & 5 Included	3-pin Receptacle, Z10 Sensor Base, 10 KVA Surge Protection	25504	3-pin Receptacle, Z10 Sensor Base, 10 KVA Surge Protection
		25405	31000-45000Lum	200-250-300W				25505	

### Mounts (Sold Separately)

Image	Color	Part #	Image	Color	Part #	Works With	Description
	Dark Bronze	24870		White	24984	100W-300W	Sektor Slipfit Knuckle Mount Dark Bronze or White (all size area lights) Adjustable for Mounting on Tenon
		24988			24989	100W-150W Only	Sektor Slipfit Knuckle Mount Dark Bronze or White (for small size area lights) Adjustable for Mounting on Tenon
		24871			24985	100W-300W	Sektor Straight Arm Quick Mount Dark Bronze or White (all size area lights) for Side Mount on Pole or Wall
		24908			24987	100W-300W	Sektor Adjustable Universal Arm Mount Dark Bronze or White (for all size area lights) for Mounting on Side of Pole or Wall.
		24872			24986	100W-300W	Sektor Trunnion Mount Dark Bronze or White (for all size area lights) for Mounting on Side of Square Pole or Wall.

## Product Selector Guide Continued

### Side and Back Shields

Image	Color	Part #	Image	Color	Part #	Works With	Description
	Dark Bronze	24971		White	24976	60W-150W Only	Sektor Side Shield Dark Bronze or White for Small Size Area Lights
		24972			24977	150W-300W Only	Sektor Side Shield Dark Bronze or White for Large Size Area Lights
		24969			24973	60W-150W Only	Sektor Back Shield Dark Bronze or White for Small Size Area Lights
		24970			24974	150W-300W Only	Sektor Back Shield Dark Bronze or White for Large Size Area Lights

### Distribution Type 2 & 4 Lenses

Image	Size	Part #	Image	Size	Part #	Description
	Small 60W-150W	24961		Large 150W-300W	24962	Pair of Lenses (One Distribution Type 2 and One Distribution Type 4) Quick Field Install to Switch out Lens Type.

### Standalone Sensors

Image	Color	Part #	Image	Color	Part #	Description
	Bronze	24981		White	24982	Haisen PIR Sensor Indoor/Outdoor Wet Location Rated, Bronze or White Housing, Z10 base Compatible, Daylight Harvesting, 0-10V Dimming, Remote 90555 and/or Dial Quick Setting Option
	White Supplies Last	30292		New Model	90555	Haisen Remote Control for Programming the PIR Sensor Above. SKU 30292 is phasing out to newer model 90555 (Both work with the Sensors above)

### Bluetooth MW Connect Sensors & Controllers (Nodes) \*COMING SOON - Q1 2026\*

Image	Color	Part #	Image	Color	Part #	Description
	Bronze	25412		White	25416	TruBlu SIG Mesh PIR Highbay/Lowbay 0-10V Dimming Sensor controller, 12-24VDC, Z-10 with photocell, Bronze or White
	Bronze	25413		White	25417	TruBlu SIG Mesh Fixture Node/Controller, 12-24VDC, Single Channel 0-10 Volt Dimming, Z10, Bronze or White
	Clear	25414				TruBlu SIG Mesh Fixture Node/Controller, 12-24VDC, Single Channel 0-10 Volt Dimming, Z10, with Long Range Antenna, Clear

### Photocell (Fixture ships with 3-Pin Receptacle)

Image	Voltage	Part #	Image	Voltage	Part #	Description
	120-277VAC	24997		480 (HV)	24998	Sektor 3-Pin Photocell Twist Lock 120 277VAC (LT124B-NC) for G2 Area Light & Flood (3 standard wires)
	120-277VAC	24980				Sektor 7PR (7-Pin) Receptacle & Shorting Cap (for Sektor Area Lights and Floods) Twist Lock with 4 Contactors (Required with 7-Pin Photocell)

Area Lights with the 7-Pin Receptacle installed are available on a made to order basis.

## Performance Table

SKU	Product Code	Selectable Wattage(W)	Distribution (Type)	CCT=3000K			CCT=4000K			CCT=5000K		
				Lumen(lm)	Efficacy (lm/W)	Bug Rating	Lumen(lm)	Efficacy (lm/W)	Bug Rating	Lumen(lm)	Efficacy (lm/W)	Bug Rating
25400	SAL2-1-LS-CS-T35X-U-BZ	60	II	9180	153	B3-U0-G3	9600	160	B3-U0-G3	9420	157	B3-U0-G3
			III	8880	148	B3-U0-G3	9600	160	B3-U0-G3	9480	158	B3-U0-G3
			IV	9000	150	B3-U0-G3	9720	162	B3-U0-G3	9120	152	B3-U0-G3
			V	9180	153	B3 U0 G2	9600	160	B3 U0 G2	9480	158	B3 U0 G2
		80	II	12240	153	B3-U0-G3	12320	154	B3-U0-G3	12560	157	B3-U0-G3
			III	11600	145	B3-U0-G3	12480	156	B3-U0-G3	12000	150	B3-U0-G3
			IV	11920	149	B3-U0-G3	12560	157	B3-U0-G3	12320	154	B3-U0-G3
			V	11920	149	B3 U0 G2	12560	157	B3 U0 G2	12240	153	B3 U0 G2
		100	II	14500	145	B3-U0-G3	15100	151	B3-U0-G3	15200	152	B3-U0-G3
			III	14000	140	B3-U0-G3	15300	153	B3-U0-G3	15000	150	B3-U0-G3
			IV	14500	145	B3-U0-G3	15500	155	B3-U0-G3	15000	150	B3-U0-G3
			V	14500	146	B3 U0 G2	15400	154	B3 U0 G2	14800	148	B3 U0 G2
25401	SAL2-2-LS-CS-T35X-U-BZ	100	II	14200	142	B3-U0-G3	15200	152	B3-U0-G3	15300	153	B3-U0-G3
			III	14500	145	B3-U0-G3	15600	156	B3-U0-G3	15100	151	B3-U0-G3
			IV	14700	147	B3-U0-G3	15700	157	B3-U0-G3	15100	151	B3-U0-G3
			V	14600	146	B3 U0 G2	15600	156	B3 U0 G2	15000	150	B3 U0 G2
		120	II	16560	138	B3-U0-G3	18120	151	B3-U0-G3	17280	144	B3-U0-G3
			III	16800	140	B3-U0-G3	18360	153	B3-U0-G3	17640	147	B3-U0-G3
			IV	17040	142	B3-U0-G3	18360	153	B3-U0-G3	17520	146	B3-U0-G3
			V	17040	142	B3 U0 G2	18240	152	B3 U0 G2	17400	145	B3 U0 G2
		150	II	20100	134	B3-U0-G3	22200	148	B3-U0-G3	21300	142	B3-U0-G3
			III	20550	137	B3-U0-G3	22500	150	B3-U0-G3	21750	145	B3-U0-G3
			IV	20400	136	B3-U0-G3	22200	148	B3-U0-G3	21000	140	B3-U0-G3
			V	20400	136	B3 U0 G2	22200	148	B3 U0 G2	20700	138	B3 U0 G2

## Performance Table continued

SKU	Product Code	Selectable Wattage(W)	Distribution (Type)	CCT=3000K			CCT=4000K			CCT=5000K		
				Lumen(lm)	Efficacy (lm/W)	Bug Rating	Lumen(lm)	Efficacy (lm/W)	Bug Rating	Lumen(lm)	Efficacy (lm/W)	Bug Rating
25402	SAL2-3-LS-CST35X-U-BZ	150	II	22500	150	B4-U0-G4	23700	158	B4-U0-G4	23100	154	B4-U0-G4
			III	22800	152	B4-U0-G4	24000	160	B4-U0-G4	23550	157	B4-U0-G4
			IV	22350	149	B4-U0-G4	23850	159	B4-U0-G4	23400	156	B4-U0-G4
			V	22800	152	B4 U0 G2	24300	162	B4 U0 G2	23250	155	B4 U0 G2
		180	II	25740	143	B4-U0-G4	28440	158	B4-U0-G4	27000	150	B4-U0-G4
			III	26280	146	B4-U0-G4	28440	158	B4-U0-G4	27900	155	B4-U0-G4
			IV	25920	144	B4-U0-G4	28440	158	B4-U0-G4	27360	152	B4-U0-G4
			V	26640	148	B4 U0 G2	28800	160	B4 U0 G2	27000	150	B4 U0 G2
		200	II	28400	142	B4-U0-G4	30800	154	B4-U0-G4	29800	149	B4-U0-G4
			III	28800	144	B4-U0-G4	31000	155	B4-U0-G4	30400	152	B4-U0-G4
			IV	28600	143	B4-U0-G4	30800	154	B4-U0-G4	29800	149	B4-U0-G4
			V	29000	145	B4 U0 G2	31200	156	B4 U0 G2	29200	146	B4 U0 G2
25403	SAL2-4-LS-CST35X-U-BZ	200	II	28200	141	B4-U0-G4	31000	155	B4-U0-G4	29800	149	B4-U0-G4
			III	28600	143	B4-U0-G4	31000	155	B4-U0-G4	30400	152	B4-U0-G4
			IV	28400	142	B4-U0-G4	30800	154	B4-U0-G4	30200	151	B4-U0-G4
			V	29000	145	B4 U0 G2	31400	157	B4 U0 G2	30200	151	B4 U0 G2
		250	II	34500	138	B4-U0-G4	37750	151	B4-U0-G4	36250	145	B4-U0-G4
			III	34750	139	B4-U0-G4	38250	153	B4-U0-G4	36250	145	B4-U0-G4
			IV	34500	138	B4-U0-G4	38000	152	B4-U0-G4	35750	143	B4-U0-G4
			V	35000	140	B4 U0 G2	38000	152	B4 U0 G2	36250	145	B4 U0 G2
		300	II	39600	132	B4-U0-G4	45000	150	B4-U0-G4	42000	140	B4-U0-G4
			III	40500	135	B4-U0-G4	44400	148	B4-U0-G4	42000	140	B4-U0-G4
			IV	39000	130	B4-U0-G4	44400	148	B4-U0-G4	42000	140	B4-U0-G4
			V	40500	135	B4 U0 G2	44400	148	B4 U0 G2	41700	139	B4 U0 G2

## Performance Table continued

SKU	Product Code	Selectable Wattage(W)	Distribution (Type)	CCT=3000K			CCT=4000K			CCT=5000K		
				Lumen(lm)	Efficacy (lm/W)	Bug Rating	Lumen(lm)	Efficacy (lm/W)	Bug Rating	Lumen(lm)	Efficacy (lm/W)	Bug Rating
25404	SAL2-2-LS-CS-T35X-U-WH	100	II	14200	142	B3-U0-G3	15200	152	B3-U0-G3	15300	153	B3-U0-G3
			III	14500	145	B3-U0-G3	15600	156	B3-U0-G3	15100	151	B3-U0-G3
			IV	14700	147	B3-U0-G3	15700	157	B3-U0-G3	15100	151	B3-U0-G3
			V	14500	145	B3 U0 G2	15600	156	B3 U0 G2	14800	148	B3 U0 G2
		120	II	16560	138	B3-U0-G3	18120	151	B3-U0-G3	17280	144	B3-U0-G3
			III	16800	140	B3-U0-G3	18360	153	B3-U0-G3	17640	147	B3-U0-G3
			IV	17040	142	B3-U0-G3	18360	153	B3-U0-G3	17520	146	B3-U0-G3
			V	16800	140	B3 U0 G2	18240	152	B3 U0 G2	17400	145	B3 U0 G2
		150	II	20100	134	B3-U0-G3	22200	148	B3-U0-G3	21300	142	B3-U0-G3
			III	20550	137	B3-U0-G3	22500	150	B3-U0-G3	21750	145	B3-U0-G3
			IV	20400	136	B3-U0-G3	22200	148	B3-U0-G3	21000	140	B3-U0-G3
			V	20400	136	B3 U0 G2	22200	148	B3 U0 G2	21300	142	B3 U0 G2
25405	SAL2-4-LS-CS-T35X-U-WH	200	II	28200	141	B4-U0-G4	31000	155	B4-U0-G4	29800	149	B4-U0-G4
			III	28600	143	B4-U0-G4	31000	155	B4-U0-G4	30400	152	B4-U0-G4
			IV	28400	142	B4-U0-G4	30800	154	B4-U0-G4	30200	151	B4-U0-G4
			V	29000	145	B4 U0 G2	31400	157	B4 U0 G2	30200	151	B4 U0 G2
		250	II	34500	138	B4-U0-G4	37750	151	B4-U0-G4	36250	145	B4-U0-G4
			III	34750	139	B4-U0-G4	38250	153	B4-U0-G4	36250	145	B4-U0-G4
			IV	34500	138	B4-U0-G4	38000	152	B4-U0-G4	35750	143	B4-U0-G4
			V	35000	140	B4 U0 G2	38000	152	B4 U0 G2	36250	145	B4 U0 G2
		300	II	39600	132	B4-U0-G4	45000	150	B4-U0-G4	42000	140	B4-U0-G4
			III	40500	135	B4-U0-G4	44400	148	B4-U0-G4	42000	140	B4-U0-G4
			IV	39000	130	B4-U0-G4	44400	148	B4-U0-G4	42000	140	B4-U0-G4
			V	40500	135	B4 U0 G2	44400	148	B4 U0 G2	41700	139	B4 U0 G2


## Specifications Table

	SAL2-1-LS-CS-T35X-U-BZ	SAL2-2-LS-CS-T35X-U-BZ	SAL2-3-LS-CS-T35X-U-BZ	SAL2-4-LS-CS-T35X-U-BZ
<b>Nominal Wattage</b>	60W/80W/100W Selectable	100W/120W/150W Selectable	150W/180W/200W Selectable	200W/250W/300W Selectable
<b>Delivered Lumens</b>	9,400/12,000/15,000	15,000/18,000/22,000	22,000/28,000/31,000	31,000/38,000/45,000
<b>Efficacy (lm/W)</b>	154-160	148-157	154-160	148-157
<b>Amperage</b>	120VAC(1.0A) 277VAC(0.4A)	120VAC(1.5A) 277VAC(0.6A)	120VAC(2.0A) 277VAC(0.8A)	120VAC(3.0A) 277VAC(1.2A)
<b>Distribution</b>	Field-Interchangeable Type III (installed) & V (included), Type II&IV Pair Sold as Accessory			
<b>CCT</b>	3000K/4000K/5000K Selectable			
<b>CRI</b>	>80 CRI			
<b>L70 Lifetime (hrs)</b>	>100,000 Hrs			
<b>Voltage</b>	Universal 120-277VAC & High Voltage 277-480VAC			
<b>Power Factor</b>	>0.9			
<b>Dimming</b>	0-10VDC Dimming			
<b>Housing Material</b>	Die-cast Aluminum with Powder Coated Finish			
<b>Lens</b>	PC TIR (Total Internal Reflection) Optics			
<b>Operating Temperature (Min)</b>	-40° C			
<b>Operating Temperature (Max)</b>	50° C			
<b>Listings</b>	UL, cUL, DLC 5.1 Premium, FCC			
<b>Environment</b>	IP 65, UL Wet Location Rating			
<b>Weight (lbs.)</b>	11.79	13.23	18.39	19.31
<b>Warranty (Years)</b>	5 Years Standard			


DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_  
 TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_

## Mounting Bracket Options


Slip Fitter Mount <i>Fits 2 3/8" Tennon</i>		
Product SKU	Product Code	Description
24870	SEK-SF	SekTor Slipfit Knuckle Mount Bronze
24984	SEK-SF-WH	SekTor Slipfit Knuckle Mount White

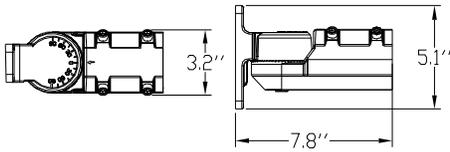


Slip Fitter Mount <i>Fits 2 3/8" Tennon</i>		
Product SKU	Product Code	Description
24988	SEK-SF-S	SekTor Slipfit Knuckle Mount, Bronze (for SAL2 Area Light only 100W-150W Product)
24989	SEK-SF-S-WH	SekTor Slipfit Knuckle Mount, White (for SAL2 Area Light only 100W-150W Product)

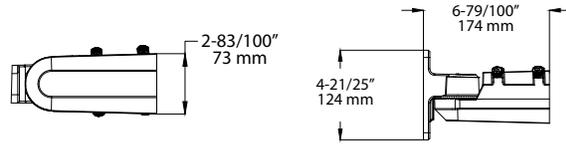


Trunnion Mount		
Product SKU	Product Code	Description
24872	SEK-TR	SekTor Trunnion Mount Bronze
24986	SEK-TR-WH	SekTor Trunnion Mount White

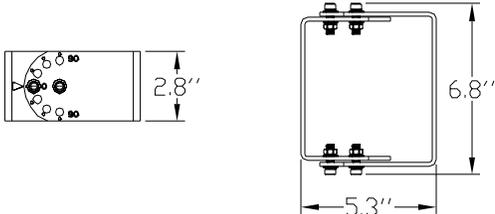

Quick Mount Arm <i>Fits Square and Round Poles (between 3" - 6")</i>		
Product SKU	Product Code	Description
24871	SEK-QM	SekTor Straight Arm Quick Mount Bronze
24985	SEK-QM-WH	SekTor Straight Arm Quick Mount White



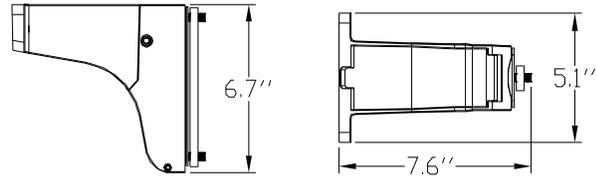


Adjustable Pole Mount <i>Fits Square and Round Poles (between 3" - 6")</i>		
Product SKU	Product Code	Description
24908	SEK-PM	SekTor Adjustable Pole Mount Bronze
24987	SEK-PM-WH	SekTor Adjustable Pole Mount White

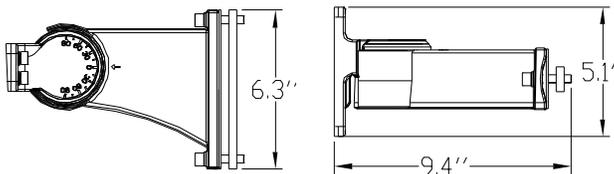



## Housing Dimensions with Mounting Arms (Sold Separately)

### 100W & 150W Housing

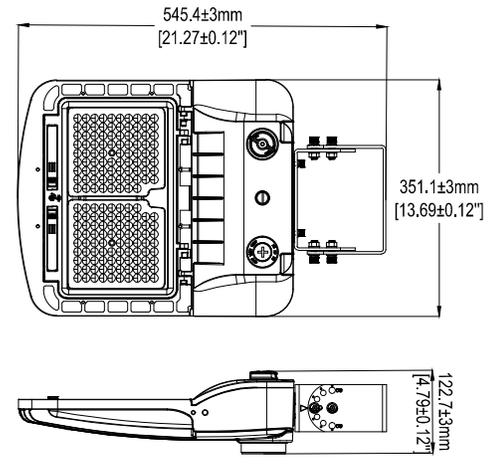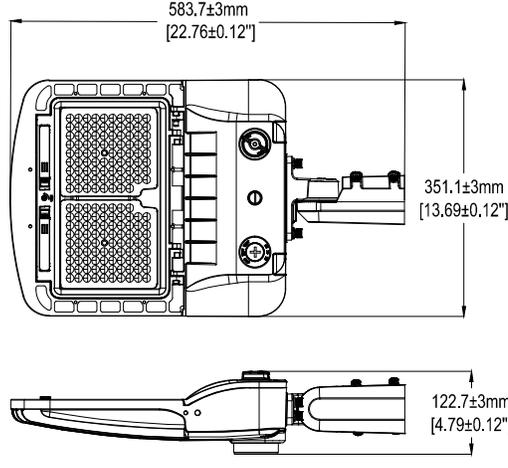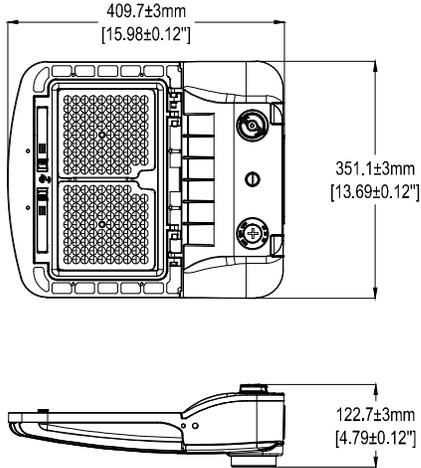

**SekTor Slipfit Knuckle Mount**

**Trunion Mount**



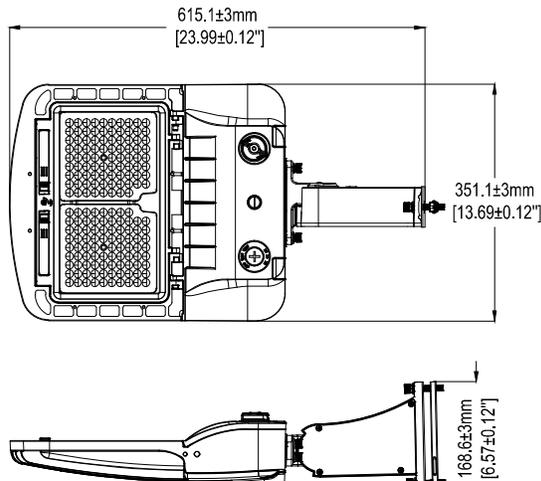
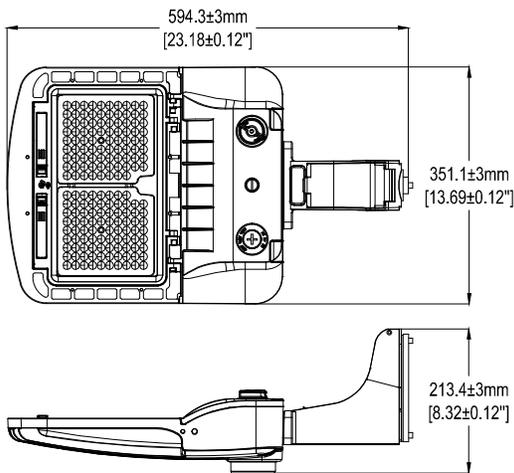


**Straight Arm Quick Mount**





**Adjustable Universal Pole Mount**

## Housing Dimensions with Mounting Arms (Sold Separately)

### 200W, 240W & 300W Housing

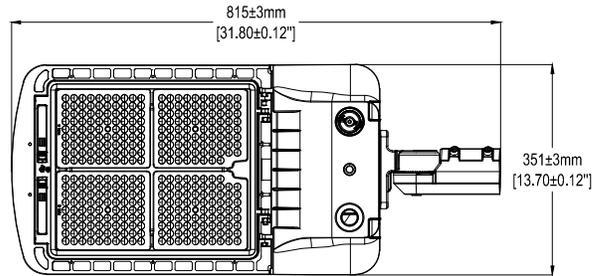
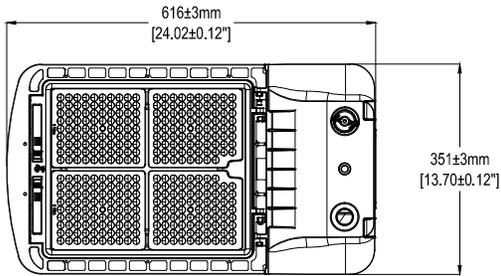


**SekTor Slipfit Knuckle Mount**

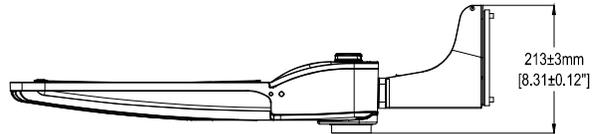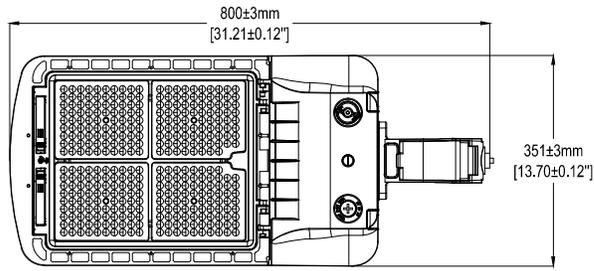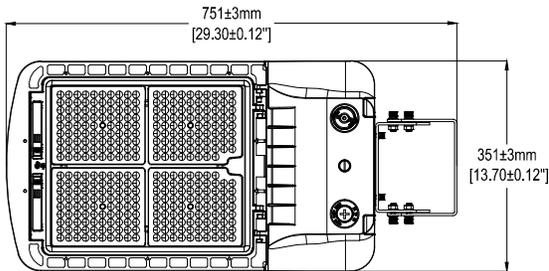

**Trunnion Mount**


**Straight Arm Quick Mount**

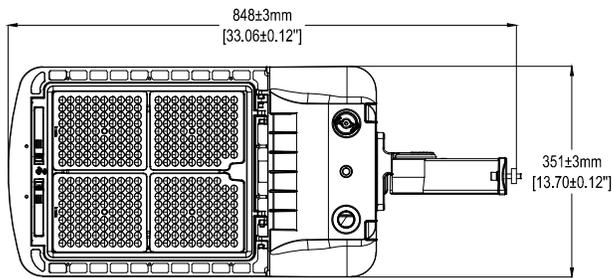


**Adjustable Universal Pole Mount**

## Drill Patterns

SEK-QM Drill Patterns

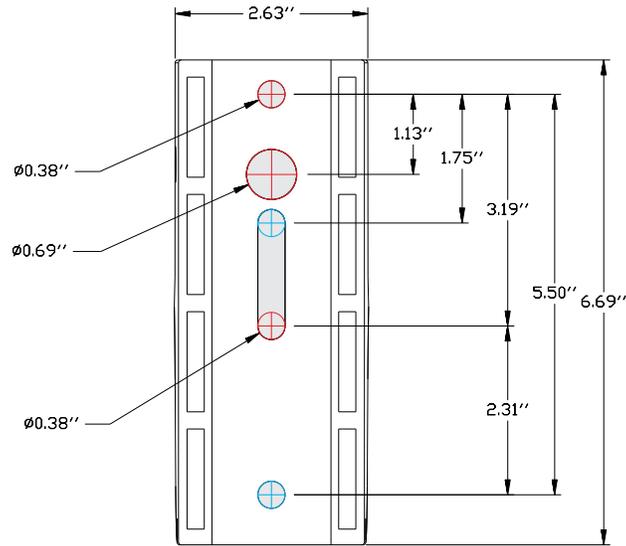


SEK-PM Drill Patterns

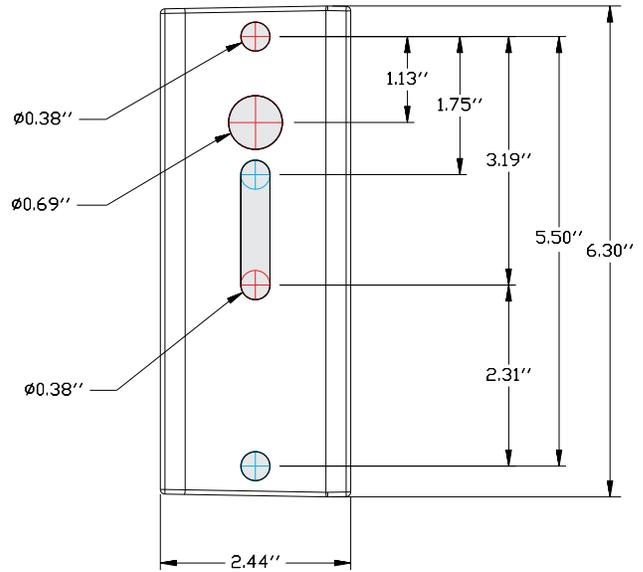


## EPA

### 100W & 150W Housing

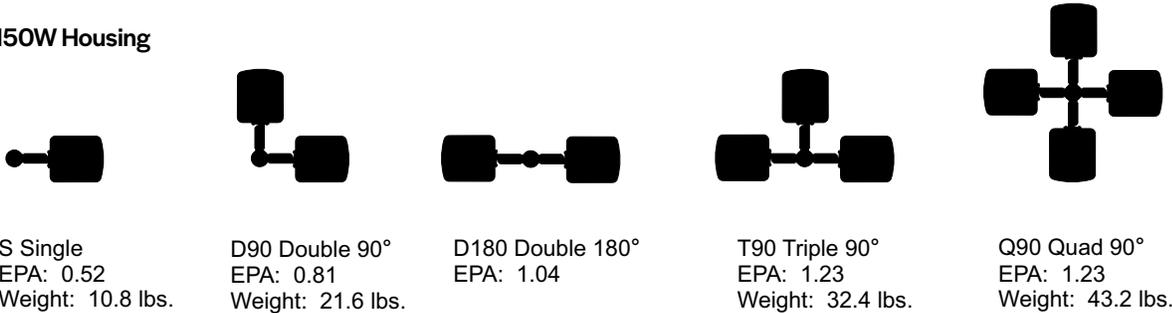

### 200W, 240W & 300W Housing






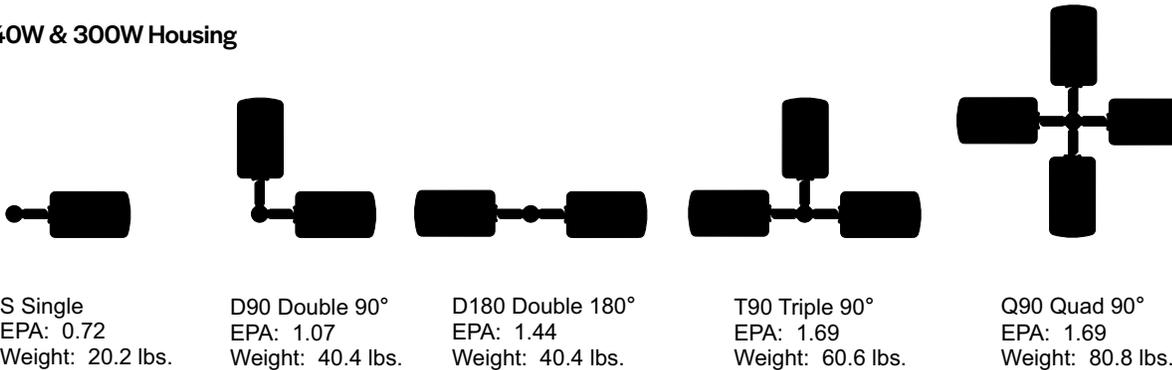


Note-Double requires 2 mount accessories, Triple requires 3 mount accessories and Quad needs 4 mount accessories sold separately.  
 There is a fixed mount Product ID: Bronze Straight Arm Mount-24871, White Straight Arm Mount-24985. Adjustable mount Product ID: Bronze Adjustable Mount 24908, White Adjustable Mount 24987.

LED Luminaires

## Photometry

\*The below diagrams and zonal lumen summaries represent the stock Type 3 and Type 5 fixtures at highest wattage and 4000K. For complete photometry/IES files, please visit the resources tab on the product page.

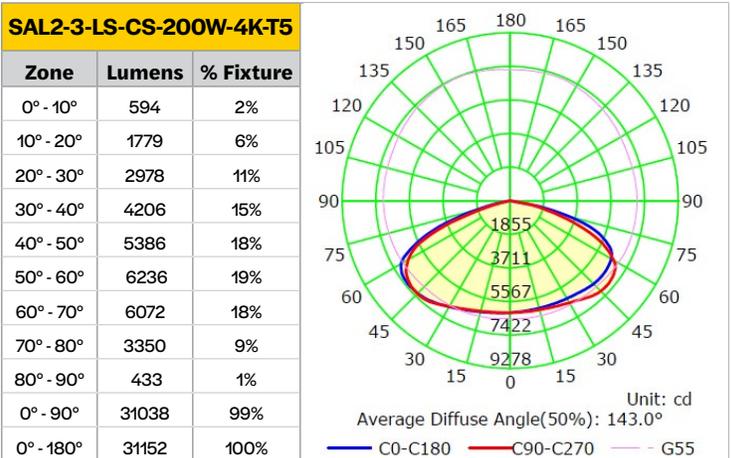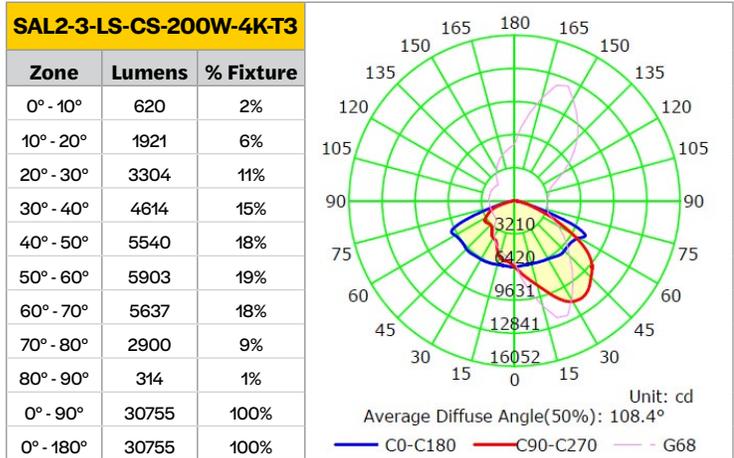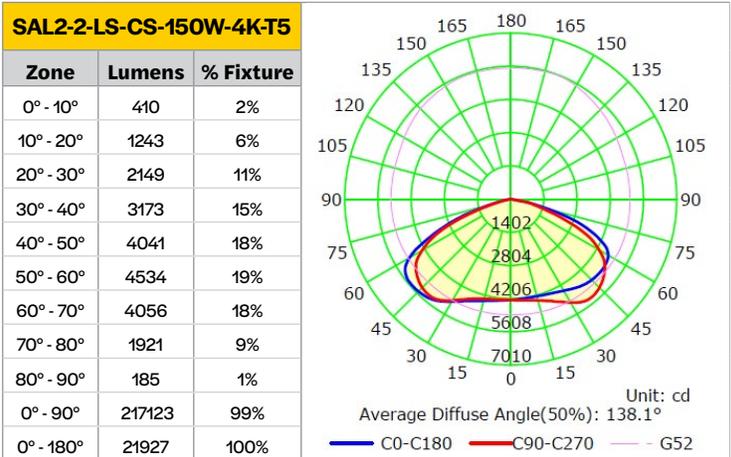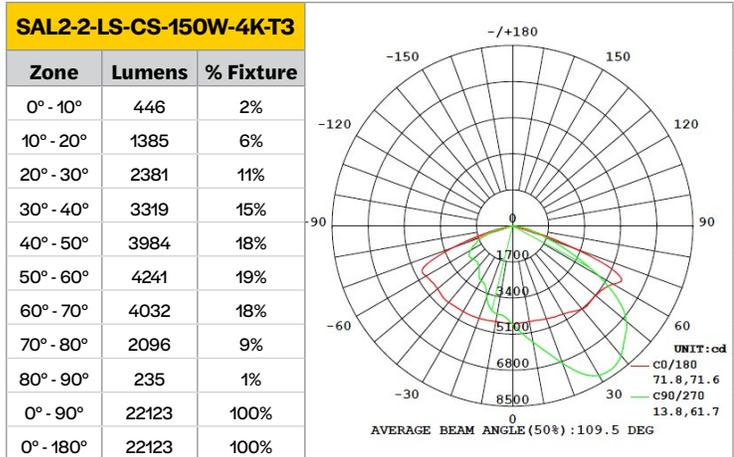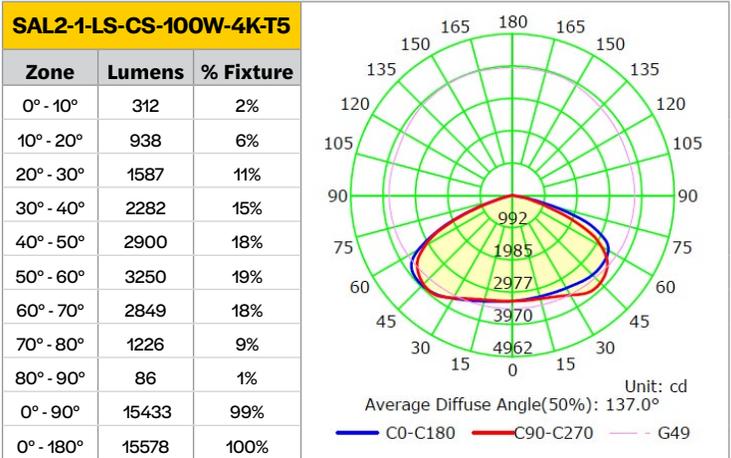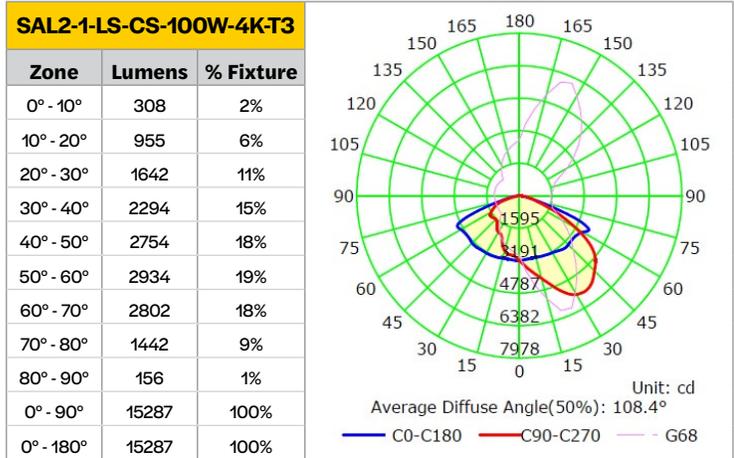

## Photometry

\*The below diagrams and zonal lumen summaries represent the stock Type 3 and Type 5 fixtures at highest wattage and 4000K.  
 For complete photometry/IES files, please visit the resources tab on the product page.

