

LED Lamps

Decorative LED Filament A19 Lamps

- 40W, 60W and 100W Incandescent Equivalents
- Classic A-Shapes Glass
- High Color Quality with 90+ CRI
- Title 20 Compliant
- Select Models Meet Title 24 Requirements

Specifications

Description

Halco's Decorative LED Filament A19 Series brings together the classic look of a traditional bulb with the flexibility of modern LED technology. Featuring standard, color-selectable, and lumen-selectable models, this versatile series delivers up to 1600 lumens with a vivid 90+ CRI for vibrant, true-to-life light. Offered in warm and daylight tones, these lamps provide consistent, high-quality illumination for both decorative and everyday applications. With options for Triac or 3-step dimming, they're an ideal choice for residential, hospitality, retail, and commercial settings where style and performance matter.

Performance

- Color temperature options: 2700K, 3000K, 5000K
- Selectable color temperatures 2700K, 3000K, 3500K, 4000K, 5000K (color-selectable model)
- Up to 114 lumens per watt
- 136 to 1600 lumen options
- CRI 90+
- L70 Lumen maintenance > 15,000 hours
- Triac dimmable (specific models)
- 3-step dimmable (lumen-selectable models)
- 120V
- -20°C to 40°C operating temperature
- 2 year limited warranty

Construction

- Clear, Frosted & Silver Bowl glass lens options
- Filament style LED
- E26 base options
- Nickel-plated aluminum base



Applications

- Residential General and Decorative Lighting
- Hospitality and Restaurant Lighting
- Retail Lighting and Displays
- Commercial and Office Accent Lighting
- Event and Specialty Lighting

Certifications

- UL listed for wet locations
- FCC part 15 compliant
- Title 20 compliant
- Title 24 compliant options

LED Lamps

Decorative LED Filament A19 Lamps

Ordering Logic:

Wattage / Shape	Finish	Technology / Generation	CRI / CCT	Base	Dimming	Standard	Option
5A19 = 5W, A19 Bulb 9A19 = 9W, A19 Bulb 14A19 = 14W, A19 Bulb LSA19 = Lumen Selectable, A19 Bulb	CL = Clear FR = Frosted	FLED4 = Filament LED Generation 4	927 = 90 CRI, 2700K 930 = 90 CRI, 3000K 950 = 90 CRI, 5000K 9CS = 90 CRI, Color Selectable 2700K-3000K-3500K-4000K-5000K	E26 = E26 Base	D = Dimmable	T24 = Title 24	SB = Silver Bowl

Ordering Information

Product SKU	Product Code	Product Description	Equiv Watts	Replaces
82524	5A19-CL-FLED4-927-E26-D-T24	A19 lamp with E26 base, 2700K and 450 lumens, Clear, Dimmable, T24 Compliant	40W	85037
82525	5A19-CL-FLED4-930-E26-D-T24	A19 lamp with E26 base, 3000K and 450 lumens, Clear, Dimmable, T24 Compliant	40W	
82526	5A19-CL-FLED4-950-E26-D-T24	A19 lamp with E26 base, 5000K and 450 lumens, Clear, Dimmable, T24 Compliant	40W	
82527	5A19-FR-FLED4-927-E26-D-T24	A19 lamp with E26 base, 2700K and 450 lumens, Frosted, Dimmable, T24 Compliant	40W	
82528	5A19-FR-FLED4-930-E26-D-T24	A19 lamp with E26 base, 3000K and 450 lumens, Frosted, Dimmable, T24 Compliant	40W	
82529	5A19-FR-FLED4-950-E26-D-T24	A19 lamp with E26 base, 5000K and 450 lumens, Frosted, Dimmable, T24 Compliant	40W	
82530	9A19-CL-FLED4-927-E26-D-T24	A19 lamp with E26 base, 2700K and 800 lumens, Clear, Dimmable, T24 Compliant	60W	85148; 85039
82531	9A19-CL-FLED4-930-E26-D-T24	A19 lamp with E26 base, 3000K and 800 lumens, Clear, Dimmable, T24 Compliant	60W	85144; 85142
82532	9A19-CL-FLED4-950-E26-D-T24	A19 lamp with E26 base, 5000K and 800 lumens, Clear, Dimmable, T24 Compliant	60W	
82533	9A19-CL-FLED4-9CS-E26-D	A19 lamp with E26 base, CCT selectable and 800 lumens, Clear, Dimmable	60W	85144; 85142; 85148; 85039
82534	9A19-FR-FLED4-927-E26-D-T24	A19 lamp with E26 base, 2700K and 800 lumens, Frosted, Dimmable, T24 Compliant	60W	85040
82535	9A19-FR-FLED4-930-E26-D-T24	A19 lamp with E26 base, 3000K and 800 lumens, Frosted, Dimmable, T24 Compliant	60W	
82536	9A19-FR-FLED4-950-E26-D-T24	A19 lamp with E26 base, 5000K and 800 lumens, Frosted, Dimmable, T24 Compliant	60W	
82537	LSA19-CL-FLED4-927-E26-D	A19 lamp with E26 base, 2700K and lumen selectable, Clear, Dimmable	60W	85148; 85039
82538	LSA19-CL-FLED4-930-E26-D	A19 lamp with E26 base, 3000K and lumen selectable, Clear, Dimmable	60W	85144; 85142
82539	LSA19-CL-FLED4-950-E26-D	A19 lamp with E26 base, 5000K and lumen selectable, Clear, Dimmable	60W	
82540	LSA19-FR-FLED4-927-E26-D	A19 lamp with E26 base, 2700K and lumen selectable, Frosted, Dimmable	60W	
82541	LSA19-FR-FLED4-930-E26-D	A19 lamp with E26 base, 3000K and lumen selectable, Frosted, Dimmable	60W	
82542	LSA19-FR-FLED4-950-E26-D	A19 lamp with E26 base, 5000K and lumen selectable, Frosted, Dimmable	60W	
82543	14A19-CL-FLED4-927-E26-D	A19 lamp with E26 base, 2700K and 1600 lumens, Clear, Dimmable	100W	
82544	14A19-CL-FLED4-930-E26-D	A19 lamp with E26 base, 3000K and 1600 lumens, Clear, Dimmable	100W	
82545	14A19-CL-FLED4-950-E26-D	A19 lamp with E26 base, 5000K and 1600 lumens, Clear, Dimmable	100W	
82546	14A19-FR-FLED4-927-E26-D	A19 lamp with E26 base, 2700K and 1600 lumens, Frosted, Dimmable	100W	
82547	14A19-FR-FLED4-930-E26-D	A19 lamp with E26 base, 3000K and 1600 lumens, Frosted, Dimmable	100W	
82548	14A19-FR-FLED4-950-E26-D	A19 lamp with E26 base, 5000K and 1600 lumens, Frosted, Dimmable	100W	
82711	9A19-CL-FLED4-927-E26-D-SB	A19 Silver Bowl lamp with E26 base, 2700K and 800 lumen, Clear, Dimmable	60W	

LED Lamps

Decorative LED Filament A19 Lamps

Performance Table

Product Code	Wattage	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (lm)	Efficacy (lm/W)								
5A19-CL-FLED4-9XX-E26-D-T24	5	450	90	450	90					450	90
5A19-FR-FLED4-9XX-E26-D-T24	5	450	90	450	90					450	90
9A19-CL-FLED4-9XX-E26-D-T24	9	810	90	810	90					810	90
9A19-CL-FLED4-9CS-E26-D	8.8	800	91	800	91	800	91	800	91	800	91
9A19-FR-FLED4-9XX-E26-D-T24	9	810	90	810	90					810	90
LSA19-CL-FLED4-9XX-E26-D	2	136	68	136	68					136	68
	4	450	113	450	113					450	113
	7	800	114	800	114					800	114
LSA19-FR-FLED4-9XX-E26-D	2	136	68	136	68					136	68
	4	450	113	450	113					450	113
	7	800	114	800	114					800	114
14A19-CL-FLED4-9XX-E26-D	14	1600	114	1600	114					1600	114
14A19-FR-FLED4-9XX-E26-D	14	1600	114	1600	114					1600	114
9A19-CL-FLED4-927-E26-D-SB	8.8	800	91								

Decorative LED Filament A19 Lamps

Specifications Table

	5A19-CL-FLED4-9XX-E26-D-T24	5A19-FR-FLED4-9XX-E26-D-T24	9A19-CL-FLED4-9XX-E26-D-T24	9A19-FR-FLED4-9XX-E26-D-T24	9A19-CL-FLED4-9CS-E26-D
Nominal Wattage	5W		9W		8.8W
Delivered Lumens	450		810		800
Efficacy (lm/W)	90 LPW				91 LPW
CCT	2700K, 3000K or 5000K				Selectable 2700K, 3000K, 3500K, 4000K or 5000K
CRI	90				90
L70 Lifetime (hrs)	15,000				15,000
Voltage	120V				120V
Power Factor	0.9				0.7
Dimming	Yes				Yes
Housing Material	Glass				Glass
Base Material	Nickel-plated aluminium				Nickel-plated aluminium
Operating Temperature (Min)	-20°C				-20°C
Operating Temperature (Max)	40°C				40°C
Listings	cULus - FCC - Title 20 - Title 24 - Wet Location Rated				cULus - FCC - Title 20 - Wet Location Rated
Environment	Wet Location				Wet Location
Warranty (Years)	2				2
Weight (lbs.)	0.079				0.088
Frequency	60Hz				60Hz

Decorative LED Filament A19 Lamps

Specifications Table continued

	LSA19-CL-FLED4-9XX-E26-D	LSA19-FR-FLED4-9XX-E26-D	14A19-CL-FLED4-9XX-E26-D	14A19-FR-FLED4-9XX-E26-D	9A19-CL-FLED4-927-E26-D-SB
Nominal Wattage	Selectable 2W / 4W / 7W		14W		8.8W
Delivered Lumens	136 / 450 / 800		1600		800
Efficacy (lm/W)	68 LPW - 114 LPW		114 LPW		91 LPW
CCT	2700K, 3000K or 5000K				2700K
CRI	90				90
L70 Lifetime (hrs)	15,000				15,000
Voltage	120V				120V
Power Factor	0.7				0.7
Dimming	Yes (3-Step)		Yes		Yes
Housing Material	Glass				Glass
Base Material	Nickel-plated aluminium				Nickel-plated aluminium
Operating Temperature (Min)	-20°C				-20°C
Operating Temperature (Max)	40°C				40°C
Listings	cULus - FCC - Title 20 - Wet Location Rated				cULus - FCC - Title 20 - Wet Location Rated
Environment	Wet Location				Wet Location
Warranty (Years)	2				2
Weight (lbs.)	0.079				0.071
Frequency	60Hz				60Hz



LED Lamps

Decorative LED Filament A19 Lamps

Dimensions

5A19-YY-FLED4-9XX-E26-D-T24
 9A19-YY-FLED4-9XX-E26-D-T24
 LSA19-YY-FLED4-9XX-E26-D
 14A19-YY-FLED4-9XX-E26-D
 9A19-CL-FLED4-927-E26-D-SB

9A19-CL-FLED4-9CS-E26-D

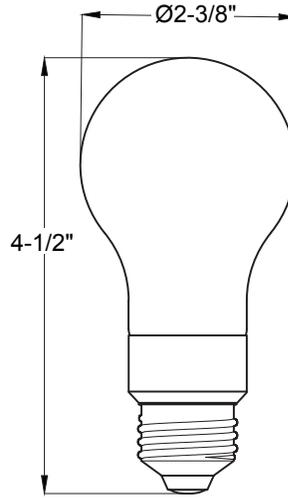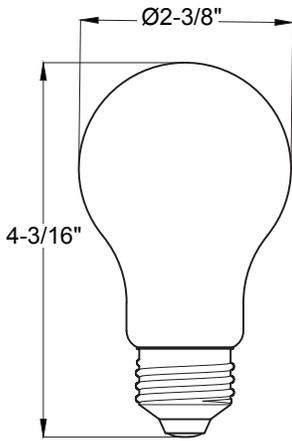

Dimmer Compatibility List

Dimmer Brand	Dimmer Model	5A19-YY-FLED4-9XX-E26-D-T24 9A19-YY-FLED4-9XX-E26-D-T24 9A19-CL-FLED4-9CS-E26-D	LSA19-YY-FLED4-9XX-E26-D	14A19-YY-FLED4-9XX-E26-D 9A19-CL-FLED4-927-E26-D-SB
Lutron	DVCL-153PR-WH	●	●	●
Lutron	MACL-153MLH-WH	●	●	●
Lutron	STCL-153PH-WH	●	●	●
Leviton	R00-RNLO6-OTW	●	●	●
Leviton	R02-DW6HD-2RW	●	●	●
KasaTP-link	HS220	●	●	●
Commercial Electric	HPDA311CWB	●	●	●