

## LED Lamps

### ProLED® Select A-19 Series

- 40W, 60W, 75W and 100W Equivalents
- Field Adjustable CCT
- E26 and GU24 Base Types
- 90+ CRI
- Title 20 Certified



### Specifications

#### Description

Halco's ProLED Select A19 Series combines classic design with advanced flexibility. Offered in both E26 and GU24 base options, each lamp features five selectable color temperatures and a high 90+ CRI for rich, true-to-life illumination. Ideal for homes, apartments, and light commercial spaces, these lamps make it easy to set the perfect mood without changing products. CEC Title 20 compliant and energy efficient, the Select A19 Series delivers the classic look customers love—backed by the modern performance they expect.

#### Performance

- Selectable color temperature  
2700K, 3000K, 3500K, 4000K, 5000K
- Up to 123 lumens per watt
- 484 to 1687 lumen options
- CRI 90+
- L70 Lumen maintenance > 15,000 hours
- Triac dimmable
- 120V
- -20°C to 40°C operating temperature
- 2 Year limited warranty

#### Applications

- Commercial
- Healthcare
- Retail
- Hospitality
- Residential
- K-12 Schools and Higher Education

#### Construction

- Frosted plastic lens
- Polybutylene terephthalate (PBT) plastic housing

#### Certifications

- ETL listed for damp locations
- RoHS compliant
- FCC part 15 compliant
- Title 20 compliant

## ProLED® Select A-19 Series

### Ordering Logic:

Wattage / Shape	Technology	CRI / CCT	Base	Dimming	Standard
<b>6A19</b> = 6W, A19 Lamp <b>9A19</b> = 9W, A19 Lamp <b>11A19</b> = 11W, A19 Lamp <b>15A19</b> = 15W, A19 Lamp	LED	<b>9CS</b> = 90 CRI, Color Selectable 2700K-3000K-3500K- 4000K-5000K	<b>E26</b> = E26 Base <b>GU24</b> = GU24 Base	D = Dimmable	T20 = Title 20

### Ordering Information

Product SKU	Product Code	Product Description	Equiv Watts
83211	6A19-LED-9CS-E26-D-T20	LED A19 Lamp Medium (E26) Base Color Selectable 2700K-5000K 6W 450 Lumens (40W Equiv) Dimmable T20	40W
83212	9A19-LED-9CS-E26-D-T20	LED A19 Lamp Medium (E26) Base Color Selectable 2700K-5000K 9W 800 Lumens (60W Equiv) Dimmable T20	60W
83213	11A19-LED-9CS-E26-D-T20	LED A19 Lamp Medium (E26) Base Color Selectable 2700K-5000K 11W 1100 Lumens (75W Equiv) Dimmable T20	75W
83214	15A19-LED-9CS-E26-D-T20	LED A19 Lamp Medium (E26) Base Color Selectable 2700K-5000K 15W 1600 Lumens (100W Equiv) Dimmable T20	100W
83215	9A19-LED-9CS-GU24-D-T20	LED A19 Lamp GU24 Base Color Selectable 2700K-5000K 9W 800 Lumens (60W Equiv) Dimmable T20	60W
83216	15A19-LED-9CS-GU24-D-T20	LED A19 Lamp GU24 Base Color Selectable 2700K-5000K 15W 1600 Lumens (100W Equiv) Dimmable T20	100W

## ProLED® Select A-19 Series

### Performance Table

Product Code	Wattage	2700K		3000K		3500K		4000K		5000K	
		Lumen (lm)	Efficacy (lm/W)	Lumen (lm)	Efficacy (lm/W)	Lumen (lm)	Efficacy (lm/W)	Lumen (lm)	Efficacy (lm/W)	Lumen (lm)	Efficacy (lm/W)
6A19-LED-9CS-E26-D-T20	6	484	87	521	93	543	97	541	97	507	91
9A19-LED-9CS-E26-D-T20	9	837	93	899	100	946	106	943	105	845	94
11A19-LED-9CS-E26-D-T20	11	1182	111	1225	114	1223	121	1273	119	1185	113
15A19-LED-9CS-E26-D-T20	15	1610	117	1626	117	1677	123	1681	120	1620	120
9A19-LED-9CS-GU24-D-T20	9	832	98	886	104	933	109	935	110	858	101
15A19-LED-9CS-GU24-D-T20	15	1613	117	1631	118	1686	122	1687	122	1623	118

## ProLED® Select A-19 Series


### Specifications Table

	6A19-LED-9CS-E26-D-T20	9A19-LED-9CS-E26-D-T20	11A19-LED-9CS-E26-D-T20	15A19-LED-9CS-E26-D-T20	9A19-LED-9CS-GU24-D-T20	15A19-LED-9CS-GU24-D-T20
<b>Nominal Wattage</b>	6W	9W	11W	15W	9W	15W
<b>Delivered Lumens</b>	484lm - 543lm	837lm - 946lm	1182lm - 1273lm	1610lm - 1681lm	832lm - 935lm	1613lm - 1687lm
<b>Efficacy (lm/W)</b>	87LPW - 97LPW	93LPW - 106LPW	111LPW - 121LPW	117LPW - 123LPW	98LPW - 110LPW	117LPW - 122LPW
<b>CCT</b>	Selectable 2700K, 3000K, 3500K, 4000K or 5000K					
<b>CRI</b>	90					
<b>L70 Lifetime (hrs)</b>	15,000					
<b>Voltage</b>	120V					
<b>Power Factor</b>	0.7					
<b>Dimming</b>	Yes (Triac)					
<b>Housing Material</b>	Polybutylene Terephthalate (PBT) Plastic					
<b>Lens</b>	Plastic					
<b>Operating Temperature (Min)</b>	-20°C					
<b>Operating Temperature (Max)</b>	40°C					
<b>Listings</b>	cETLus - FCC - RoHS - Title 20 - Damp Location Rated					
<b>Environment</b>	Damp Location					
<b>Warranty (Years)</b>	2					
<b>Weight (lbs.)</b>	0.073	0.073	0.099	0.099	0.106	0.15
<b>Operating Position</b>	Universal					
<b>Frequency</b>	60Hz					


## ProLED® Select A-19 Series

### Dimensions


6A19-LED-9CS-E26-D-T20  
9A19-LED-9CS-E26-D-T20

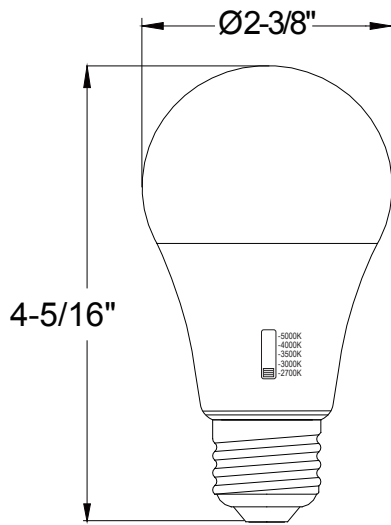


11A19-LED-9CS-E26-D-T20  
15A19-LED-9CS-E26-D-T20

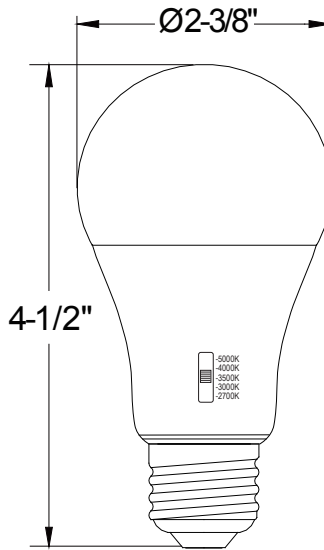

9A19-LED-9CS-GU24-D-T20

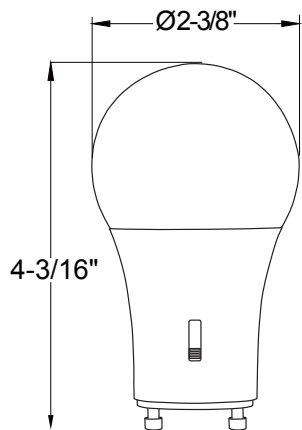

15A19-LED-9CS-GU24-D-T20

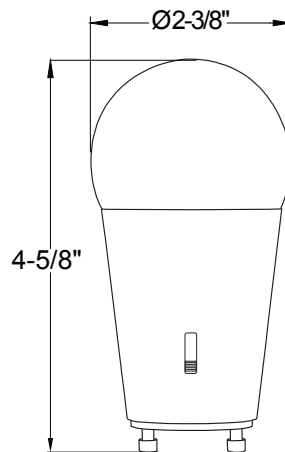

## ProLED® Select A-19 Series

### Dimmer Compatibility List

Dimmer Brand	Dimmer Model	83211	83212	83213	83214	83215	83216
Leviton	6672	●	●	●	●	●	●
Leviton	6674	●	●	●	●	●	●
Lutron	LGCL-153P	●	●	●	●	●	●
Lutron	DVCL-153P	●	●	●	●	●	●
Lutron	CTCL-153P	●	●	●	●	●	●
Lutron	MAELV-600	●	●	●	●	●	●