



## LED LAMPS

# **ProLED<sup>®</sup>** **Filament LED Series**

The look and feel of period-style incandescent through state-of-the-art LED technology




Contact Your Customer Care Specialist  
For Pricing, Orders And Technical Support.  
800.677.3334 [www.halcolighting.com](http://www.halcolighting.com)

# ProLED® Filament LED Series

Product #: \_\_\_\_\_ Type: \_\_\_\_\_  
 Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Comments: \_\_\_\_\_ Initials: \_\_\_\_\_



A19 Clear      A19 Amber      A19 Frosted      A19

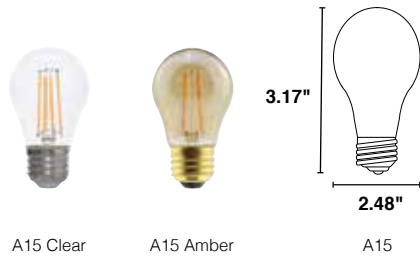

A15 Clear      A15 Amber      A15



S14 Clear      S14 Amber      ST14      ST19 Clear      ST19 Amber      ST19 E26

## Specifications

### A Shapes

- 40W and 60W Equivalent options
- Clear 2700K and 3000K options
- Frosted 2700K finish options recreate the look of incandescent
- Amber 2200K creates a nostalgic look and feel
- Dimmable to 5%
- Curved Filament option offers stylish and unique design alternative

### S14

- Replaces 25W incandescent
- Ideal for outdoor string lighting applications
- 2200K amber and 2700K clear options
- Dimmable and non-dimmable options

### ST19

- Iconic antique shape ideal for hospitality
- 40W, 60W, 75W, and 100W equivalent options
- Clear 2700K and Amber 2200K options
- Dimmable to 5%
- Curved filament option offers stylish and unique design alternative
- Not recommended for outdoor use

## Ordering Information



	Watt	Base	Product #	Product Code	Description	Dimmable	Volts	Color Temp.	CRI	Lumens	Useful Life*	Pkg. Qty.	MOL	Equivalent Wattage
<b>A19</b>														
⊕	5	E26	85037	A19CL5ANT/827/LED2	Clear Filament	Yes	120	2700K	82	450	15,000	10/60	4.13"	40
⊕	5	E26	85038	A19AMB5ANT/820/LED2	Amber Filament	Yes	120	2000K	82	340	15,000	10/60	4.13"	40
⊕	9	E26	85039	A19CL8ANT/827/LED2	Clear Filament	Yes	120	2700K	82	800	15,000	10/60	4.13"	60
⊕	9	E26	85040	A19FR8ANT/827/LED2	Frosted Filament	Yes	120	2700K	82	800	15,000	10/60	4.13"	60
⊕	9	E26	85041	A19AMB8ANT/820/LED2	Amber Filament	Yes	120	2000K	82	600	15,000	10/60	4.13"	60
⊕	6	E26	85078	A19AMB6ANT/820/CF/LED2	Clear Filament	Yes	120	2000K	82	450	15,000	10/60	4.13"	40
<b>A15</b>														
⊕	5	E26	85035	A15CL5ANT/827/LED2	Clear Filament	Yes	120	2700K	82	450	15,000	10/100	3/17"	40
⊕	6	E26	85036	A15AMB5ANT/820/LED2	Amber Filament	Yes	120	2000K	82	340	15,000	10/100	3/17"	40
<b>S14</b>														
⊕	2	E26	81139	S14CL2ANT/827/LED	Clear Filament	No	120	2700K	82	200	15,000	25/100	3.46"	25
⊕	2	E26	81140	S14AMB2ANT/822/LED	Amber Filament	No	120	2700K	82	160	15,000	25/100	3.46"	25
⊕	2	E26	82139	S14CL2ANT/827/LED2	Clear Filament	Yes	120	2700K	82	200	15,000	25/100	3.46"	25
⊕	2	E26	82140	S14AMB2ANT/822/LED2	Amber Filament	Yes	120	2700K	82	160	15,000	25/100	3.46"	25
<b>ST19</b>														
⊕	5.5	E26	85043	ST19CL5ANT/827/LED2	Clear Filament	Yes	120	2700K	82	500	15,000	10/60	5.79"	60
⊕	5.5	E26	85044	ST19AMB5ANT/822/LED2	Amber Filament	Yes	120	2200K	82	400	15,000	10/60	5.79"	40
⊕	7	E26	85045	ST19CL7ANT/827/LED2	Clear Filament	Yes	120	2700K	82	800	15,000	10/60	5.79"	100
⊕	7	E26	85046	ST19AMB7ANT/822/LED2	Amber Filament	Yes	120	2200K	82	650	15,000	10/60	5.79"	60
⊕	6.5	E26	85080	ST19AMB6ANT/820/CF/LED2	Amber Filament	Yes	120	2000K	82	450	15,000	10/60	5.79"	40
⊕	7.5	E26	85089	ST19CL7ANT/830/LED2	Clear Filament	Yes	120	3000K	82	800	15,000	10/60	4.9"	60

⊕ NEW ITEM

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels. Represents lamps that are ENERGY STAR® certified. Warranty Commercial/Industrial: This product is warranted for 3 years from the date purchase. Not for use in enclosed fixtures. May not be compatible with all dimmable systems, dimming performance may vary by system, please check the website www.halcolighting.com for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.




# ProLED<sup>®</sup>

## Filament LED Series

Product #: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Comments: \_\_\_\_\_ Initials: \_\_\_\_\_

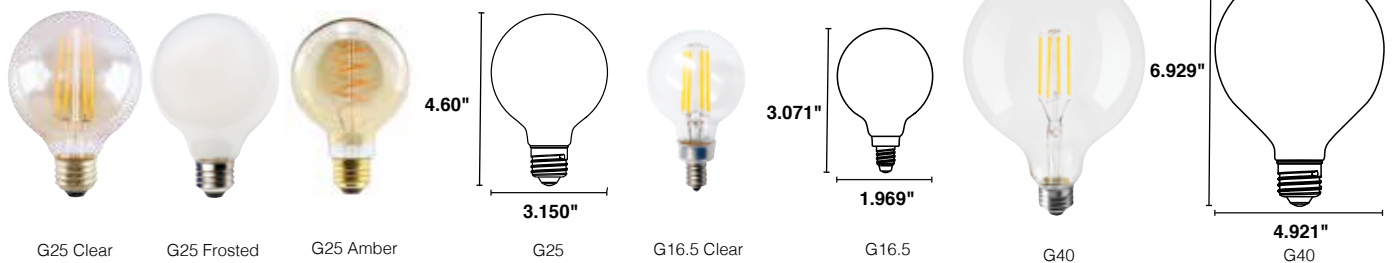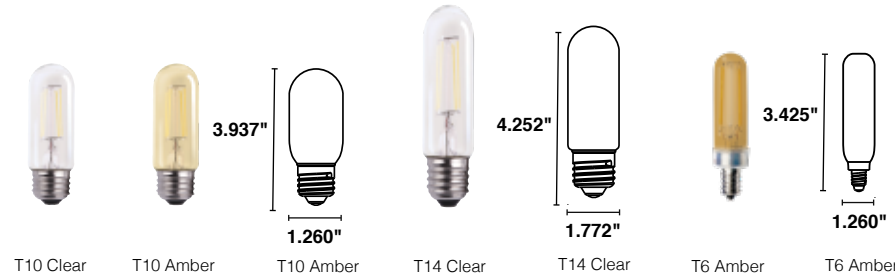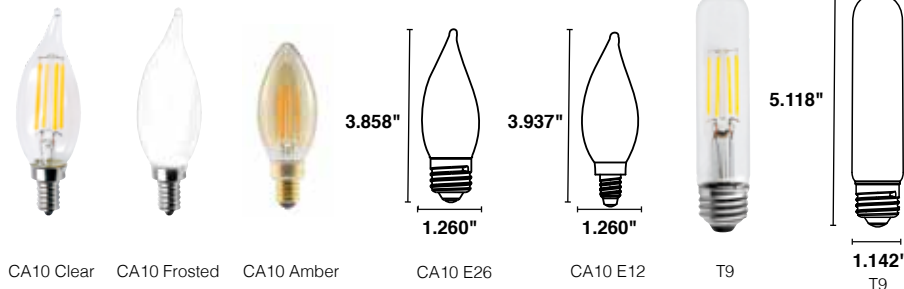

### Specifications

#### CA10

- 25W, 40W, 60W Equivalent options
- Clear 2700K and 3000K options
- Frosted 2700K finish options recreate the look of incandescent
- Amber 2200K creates a nostalgic look and feel
- E26 and E12 base options
- Dimmable to 5%

#### Tubulars

- T6, T9, T10, and T14 shape options
- 25W and 40W equivalent
- Clear 2700K and Amber 2200K available
- Dimmable to 5%

#### Globes

- G25 available in 40W, 60W, and 100W equivalent
- Clear and frosted 2700K, Amber 2200K options available
- Curved filament option offers stylish and unique design alternative
- G16.5 available in clear 2700K
- Dimmable to 5%
- E26 and E12 options

### Ordering Information



	Watt	Base	Product #	Product Code	Description	Dimmable	Volts	Color Temp.	CRI	Lumens	Useful Life*	Pkg. Qty.	MOL	Equivalent Wattage
<b>CA10</b>														
⊕	2.5	E12	85061	CA10CL2ANT/827/LED2	Clear Filament	Yes	120	2700K	82	180	15,000	10/100	4.09"	25
⊕	2.5	E12	85062	CA10FR2ANT/827/LED2	Frosted Filament	Yes	120	2200K	82	160	15,000	10/100	3.78"	25
⊕	2.5	E26	85063	CA10CL2ANT/827/E26/LED2	Clear Filament	Yes	120	2700K	82	180	15,000	10/100	3.72"	25
⊕	3.8	E26	85064	CA10CL4ANT/827/E26/LED2	Clear Filament	Yes	120	2700K	82	300	15,000	10/100	3.78"	40
⊕	3.8	E12	85065	CA10CL4ANT/827/LED2	Clear Filament	Yes	120	2700K	82	300	15,000	10/100	3.72"	40
⊕	4.5	E12	85066	CA10CL4ANT/830/LED2	Clear Filament	Yes	120	2700K	82	350	15,000	10/100	3.78"	40
⊕	5.5	E12	85067	CA10CL5ANT/827/LED2	Clear Filament	Yes	120	2700K	82	500	15,000	10/100	3.72"	60
⊕	5.5	E12	85068	CA10CL5ANT/830/LED2	Clear Filament	Yes	120	3000K	82	500	15,000	10/100	3.78"	60
⊕	5.5	E26	85069	CA10CL5ANT/827/E26/LED2	Clear Filament	Yes	120	2700K	82	500	15,000	10/100	3.72"	60
⊕	4.5	E12	85077	CA10AMB4ANT/822/LED2	Amber Filament	Yes	120	3000K	82	300	15,000	10/100	4.13"	40
⊕	3.8	E12	85082	CA10FR4ANT/827/LED2	Frosted Filament	Yes	120	2700K	82	300	15,000	10/100	3.78"	40
<b>T9</b>														
⊕	4.5	E12	85084	T9CL4ANT/830/LED2	Clear Filament	Yes	120	3000K	82	350	15,000	10/100	3.937"	25
⊕	5.5	E12	85085	T9CL4ANT/830/LED2	Clear Filament	Yes	120	3000K	82	500	15,000	10/100	3.937"	40
<b>T10</b>														
⊕	4.5	E26	85074	T10CL4ANT/827/LED2	Clear Filament	Yes	120	2700K	82	350	15,000	10/100	3.937"	25
⊕	4.5	E26	85075	T10AMB4ANT/822/LED2	Amber Filament	Yes	120	2200K	82	300	15,000	10/100	3.937"	40
<b>T14</b>														
⊕	4.5	E26	85073	T14CL4ANT/827/LED2	Clear Filament	Yes	120	2700K	82	350	15,000	10/100	3.46"	25
<b>T6</b>														
⊕	2.5	E26	85076	T6AMB2ANT/822/LED2	Amber Filament	Yes	120	2200K	82	160	15,000	10/100	3.46"	25
⊕	2.5	E12	85083	T6CL2ANT/830/LED2	Clear Filament	Yes	120	3000K	82	180	15,000	10/100	3.46"	25
<b>G16.5</b>														
⊕	2.5	E12	85086	G16.5CL2ANT/830/LED2	Clear Filament	Yes	120	3000K	82	180	15,000	10/60	4.60"	25
⊕	4.5	E12	85087	G16.5CL4ANT/830/LED2	Clear Filament	Yes	120	3000K	82	500	15,000	10/60	4.60"	40
<b>G40</b>														
⊕	7.5	E12	85088	G40CL7ANT/830/LED2	Clear Filament	Yes	120	3000K	82	500	15,000	10/60	4.60"	100
<b>G25</b>														
⊕	5.5	E26	85047	G25CL5ANT/827/LED2	Clear Filament	Yes	120	2700K	82	500	15,000	10/60	4.60"	60
⊕	5.5	E26	85048	G25FR5ANT/827/LED2	Frosted Filament	Yes	120	2700K	82	500	15,000	10/60	4.60"	60
⊕	5.5	E26	85049	G25CL5ANT/830/LED2	Clear Filament	Yes	120	3000K	82	500	15,000	10/60	4.60"	60
⊕	7	E26	85072	G25CL7ANT/827/LED2	Clear Filament	Yes	120	2700K	82	800	15,000	10/604	4.60"	100
⊕	6.5	E26	85079	G25AMB6ANT/820/CF/LED2	Amber Filament	Yes	120	2000K	82	250	15,000	10/60	4.60"	40
<b>G16.5</b>														
⊕	3.5	E12	85070	G16.5CL2ANT/827/LED2	Clear Filament	Yes	120	2700K	82	250	15,000	10/100	3.071"	40
⊕	4.5	E12	85071	G16.5CL4ANT/827/LED2	Clear Filament	Yes	120	2700K	82	350	15,000	10/100	3.071"	40

⊕ NEW ITEM

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels. Represents lamps that are ENERGY STAR<sup>®</sup> certified. Warranty Commercial/Industrial: This product is warranted for 3 years from the date purchase. Not for use in enclosed fixtures. May not be compatible with all dimmable systems, dimming performance may vary by system, please check the website [www.halcolighting.com](http://www.halcolighting.com) for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.

# ProLED® Filament LED Series

Product #: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Comments: \_\_\_\_\_ Initials: \_\_\_\_\_



## Specifications

### B11

- 25W, 40W, 60W Equivalent options
- Clear 2700K and 3000K options
- Frosted 2700K finish options recreate the look of incandescent
- Amber 2200K creates a nostalgic look and feel
- E26 and E12 base options
- Dimmable to 5%

## Ordering Information



	Watt	Base	Product #	Product Code	Description	Dimmable	Volts	Color Temp.	CRI	Lumens	Useful Life*	Pkg. Qty.	MOL	Equivalent Wattage
B11														
⊗	2.5	E26	85050	B11CL2ANT/827/E26/LED2	Clear Filament	Yes	120	2700K	82	180	15,000	10/100	3.73"	25
⊗	2.5	E12	85051	B11CL2/ANT/827/LED2	Clear Filament	Yes	120	2700K	82	180	15,000	10/100	3.78"	25
⊗	2.5	E12	85052	B11FR2/ANT/827/LED2	Frosted Filament	Yes	120	2700K	82	160	15,000	10/100	3.72"	25
⊗	4.5	E12	85053	B11CL4/ANT/830/LED2	Clear Filament	Yes	120	3000K	82	350	15,000	10/100	3.78"	40
⊗	4.5	E12	85054	B11CL4/ANT/827/LED2	Clear Filament	Yes	120	2700K	82	300	15,000	10/100	3.72"	40
⊗	4.5	E26	85055	B11CL4ANT/827/E26/LED2	Clear Filament	Yes	120	2700K	82	220	15,000	10/100	3.78"	40
⊗	4.5	E12	85056	B11AMB4ANT/820/LED2	Amber Filament	Yes	120	2000K	782	240	15,000	10/100	3.72"	40
⊗	5.5	E12	85059	B11AMB5ANT/822/LED2	Amber Filament	Yes	120	2200K	82	400	15,000	10/100	3.78"	60
⊗	5.5	E12	85060	B11CL5/ANT/830/LED2	Clear Filament	Yes	120	3000K	82	500	15,000	10/100	3.72"	60
⊗	4.5	E12	85081	B11FR4/ANT/827/LED2	Frosted Filament	Yes	120	2700K	82	300	15,000	10/100	3.78"	40



⊗ NEW ITEM

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels. [Represents lamps that are ENERGY STAR® certified.](#)

Warranty Commercial/Industrial: This product is warranted for 3 years from the date purchase. Not for use in enclosed fixtures. May not be compatible with all dimmable systems, dimming performance may vary by system, please check the website [www.halcolighting.com](http://www.halcolighting.com) for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.