

Exit & Emergency

Thermoplastic Square Remote Head Series

- White, Black or Gray Housing
- LED Adjustable Indoor/Outdoor Remotes
- Single or Double Head Configurations
- All Models Include Mounting Plate

EMERGENCE™ SERIES



Specifications

Description

Halco's Exit/Emergency LED Remotes are high performance, high-impact, adjustable, lamp heads enclosed in a thermoplastic housing designed to optimize center-to-center spacing along the path of egress.

Construction

- White, Black or Gray housings
- Rugged, injection molded, flame retardant, high temperature thermoplastic
- Suitable for wall and ceiling mount
- Mounting canopy and hardware included
- For use with standard 4" j-box

Applications

- Life Safety
- Commercial
- Light Industrial
- Office
- Educational Buildings
- Retail
- Warehouse
- Multi-Residential (small size)

Certifications

- UL924
- Wet or Damp location listed (model dependent)
- CEC Title 20 compliant
- NFPA 101 and NFPA 70
- RoHS compliant
- 0°C to 40°C operating temperature

Thermoplastic Square Remote Head Series

Ordering Logic

Series	Unit Type	Head Count	Environment	Head Shape	Color
EMG = Emergency Unit	RH = Remote Head	1 = 1 Head 2 = 2 Heads	IND = Indoor OUT = Outdoor	SQ = Square	WH = White BK = Black GY = Gray

Product Description

Product SKU	Product Code	Product Description
98053	EMG-RH-1-IND-SQ-WH	Remote Head, Indoor, Single, Square, White, 1 Watt LED, 3.6-15VDC Input
98054	EMG-RH-2-IND-SQ-WH	Remote Head, Indoor, Double, Square, White, 2 Watt LED, 3.6-15VDC Input
98057*	EMG-RH-1-OUT-SQ-WH	Remote Head, Outdoor, Single, Square, White, 1 Watt LED, 3.6-15VDC Input
98058*	EMG-RH-2-OUT-SQ-WH	Remote Head, Outdoor, Double, Square, White, 2 Watt LED, 3.6-15VDC Input
98061	EMG-RH-1-IND-SQ-BK	Remote Head, Indoor, Single, Square, Black, 1 Watt LED, 3.6-15VDC Input
98062	EMG-RH-2-IND-SQ-BK	Remote Head, Indoor, Double, Square, Black, 2 Watt LED, 3.6-15VDC Input
98065*	EMG-RH-1-OUT-SQ-BK	Remote Head, Outdoor, Single, Square, Black, 1 Watt LED, 3.6-15VDC Input
98066*	EMG-RH-2-OUT-SQ-BK	Remote Head, Outdoor, Double, Square, Black, 2 Watt LED, 3.6-15VDC Input
98069*	EMG-RH-1-IND-SQ-GY	Remote Head, Indoor, Single, Square, Gray, 1.2 Watt LED, 3.6-15VDC Input
98070*	EMG-RH-2-IND-SQ-GY	Remote Head, Indoor, Double, Square, Gray, 2.4 Watt LED, 3.6-15VDC Input
98073	EMG-RH-1-OUT-SQ-GY	Remote Head, Outdoor, Single, Square, Gray, 1.2 Watt LED, 3.6-15VDC Input
98074	EMG-RH-2-OUT-SQ-GY	Remote Head, Outdoor, Double, Square, Gray, 2.4 Watt LED, 3.6-15VDC Input

*Note: Coming soon, preorder available.

Thermoplastic Square Remote Head Series

Specifications Table

Indoor


	EMG-RH-1-IND-SQ-WH	EMG-RH-2-IND-SQ-WH	EMG-RH-1-IND-SQ-BK	EMG-RH-2-IND-SQ-BK	EMG-RH-1-IND-SQ-GY	EMG-RH-2-IND-SQ-GY
Nominal Wattage	1.2	2.4	1.2	2.4	1.2	2.4
Delivered Lumens	100	200	100	200	100	200
Efficacy (lm/W)	83					
Housing	Thermoplastic					
Input Voltage	3.6-15 VDC					
LED Life Expectancy	50,000 hrs					
Dimming	No					
Operating Temperature Min	0°C					
Operating Temperature Max	40°C					
Listings & Compliance	UL 924 Damp Location Listed - NFPA 101 - NFPA 70 - CEC T20					
Environment	Damp Location					
Weight (lbs)	0.4	0.55	0.4	0.55	0.4	0.55
Mounting	Ceiling or Wall Mount					
Warranty	5 Years					

Outdoor

	EMG-RH-1-OUT-SQ-WH	EMG-RH-2-OUT-SQ-WH	EMG-RH-1-OUT-SQ-BK	EMG-RH-2-OUT-SQ-BK	EMG-RH-1-OUT-SQ-GY	EMG-RH-2-OUT-SQ-GY
Nominal Wattage	1.2	2.4	1.2	2.4	1.2	2.4
Delivered Lumens	100	200	100	200	100	200
Efficacy (lm/W)	83					
Housing	Thermoplastic					
Input Voltage	3.6-15 VDC					
LED Life Expectancy	50,000 hrs					
Dimming	No					
Operating Temperature Min	-20°C					
Operating Temperature Max	40°C					
Listings & Compliance	UL 924 Wet Location Listed - NFPA 101 - NFPA 70 - CEC T21					
Environment	Wet Location					
Weight (lbs)	0.55	0.83	0.55	0.83	0.55	0.83
Mounting	Ceiling or Wall Mount					
Warranty	5 Years					

Thermoplastic Square Remote Head Series

Dimensions

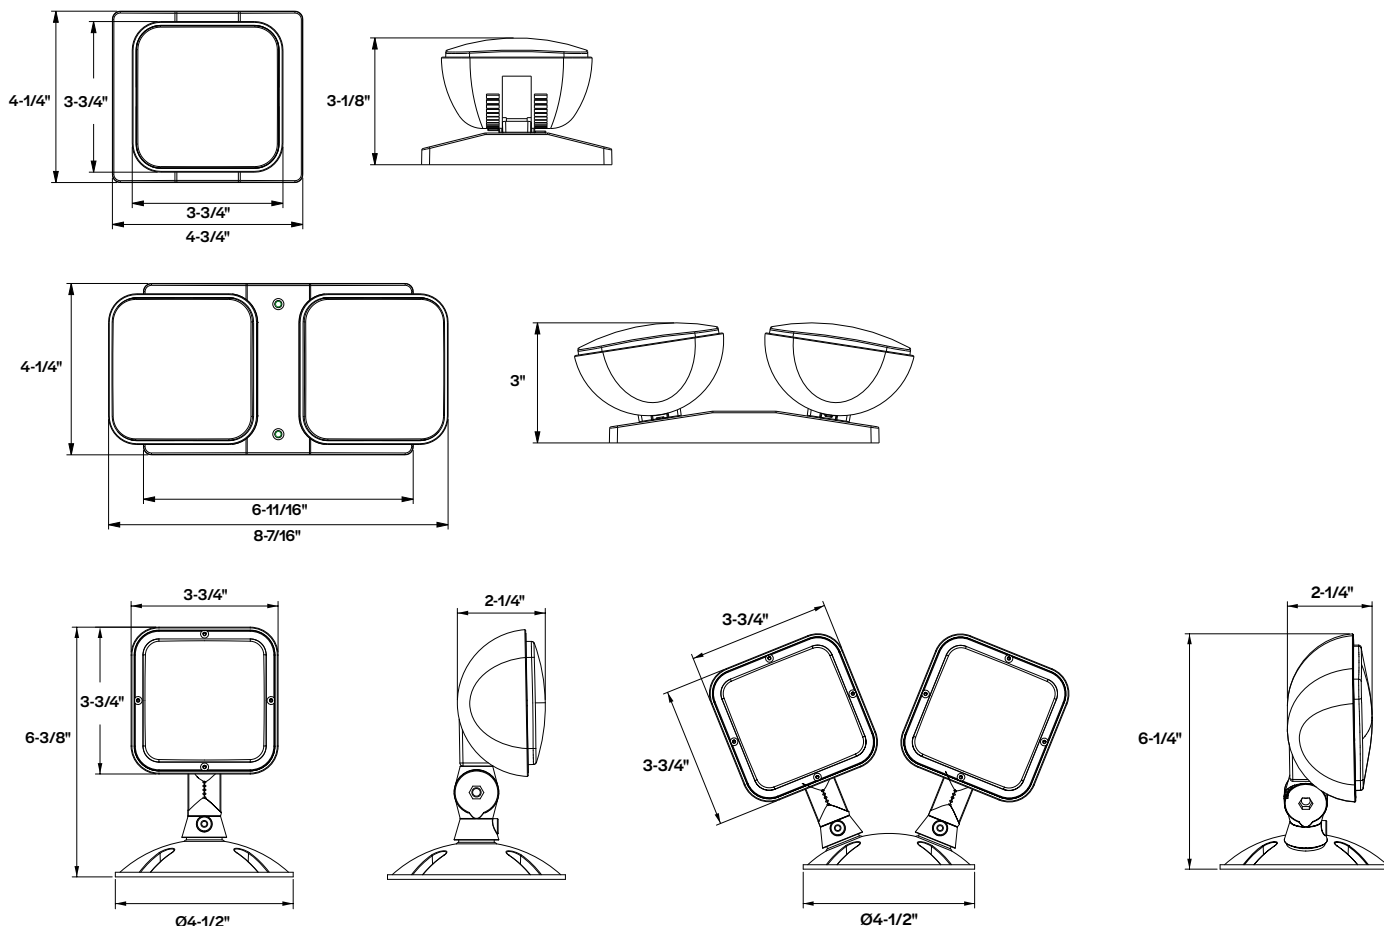

Angle Rotation

