



LED PLL Replacement Lamp

Effortless LED Technology Upgrading

Direct fit models use the existing ballast, these energy-saving replacement lamps install into compact fluorescent fixtures without any extra labor or rewiring. Bypass models offer additional energy savings and wire directly to the mains voltage. These 23W LED lamps are available to replace 40W 2G11 fluorescent lamps and are available in 3500K and 4000K CCT. The lamp features glass construction and delivers up to 2800 lumens with a wide, 220° beam distribution.

FEATURES

- UL Type A, Direct fit; Compatible with most electronic ballasts*
- UL Type B, Ballast Bypass; For direct line connection to 120-277VAC
- Extremely long, 50K hours (L70)
- Energy efficient up to 122 LPW
- Replaces 40W fluorescent 2G11 PLL lamps
- Frosted glass construction
- Suitable for dry or damp location
- Suitable for enclosed fixtures**
- UL 1993/8750

SUGGESTED APPLICATIONS

- Replacement of 2G11 40W fluorescent
- Office, retail, and hospitality
- Not for use in dimming applications or emergency ballasts



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

GENERAL SPECIFICATIONS

Input Voltage: 120-277VAC

Functional Life (L70): 50,000 Hours

Base: 2G11



CRI: 80

THD: <20%; PF >0.9

Replacement Wattage: 40W Fluorescent

Ambient Operating Temp: -4°F to 113°F

Beam Angle: 220° and 310° light emitting area

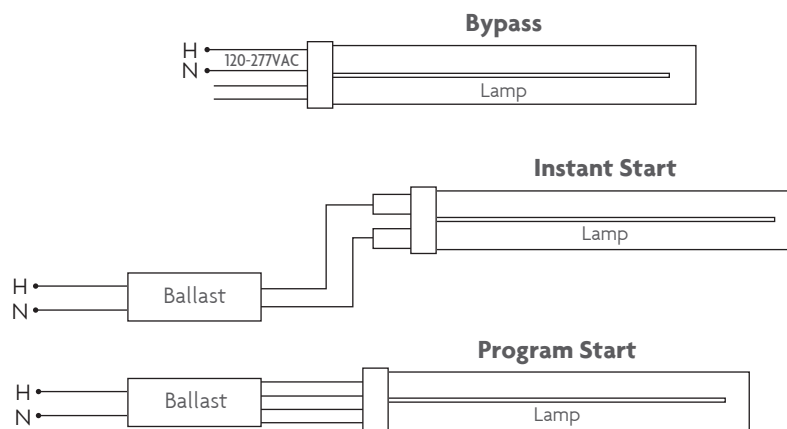

SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	UPC	Watts	CCT	Lumens	Type	DLC ID	PK-QTY
LPLLB/23/835-39	70702	751338024014	23W	3500K	2,800	Bypass	PLX9SMK9S7CX	1/24
LPLLB/23/840-39	70703	751338024021	23W	4000K	2,800	Bypass	PL9782MABROF	1/24
LPLLE/23/835-39	70706	751338024038	23W	3500K	2,600	Ballast Compatible	N/A	1/24
LPLLE/23/840-39	70707	751338024045	23W	4000K	2,800	Ballast Compatible	N/A	1/24

NOMENCLATURE

Example: **LPLLB/23/835**

LPLLB=LED PLL Shape Ballast Bypass / **23**=23 Watt / **835**=3500K

LPLLE=LED PLL Shape Ballast Compatible / **840**=4000K

ENERGY SAVINGS

	LED System Watts	Fluorescent Watts	Energy Saving, Watts	Yearly Saving, Fixture \$	5 Year Cost Savings \$
Based on 5 hours/day and .11¢/kWh					
LPLLB	23W	40W	17W	\$3.41	\$17.06
LPLLE	25W	40W	15W	\$3.01	\$15.05

** Suitable for enclosed fixtures provided the ambient temperature inside fixture does not exceed 113° F.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Specifications subject to change without notice.

