



LED SURFACE MOUNT DOWNLIGHT

CCT SELECTABLE

SUGGESTED APPLICATIONS

- Residential and commercial applications
- Multi-family, hospitality, hallways and living rooms
- Surface mount installations in most 3-1/2" and 4" octagon or round junction boxes
- Suitable for use in closets when installed in accordance with the requirements of NEC section 410.16 (A)(3) and 410.16 (C)(5)

FEATURES

- Sleek, 0.6" ultra-thin profile surface mount downlight
- 5 CCT Selectable: 2700K, 3000K, 3500K, 4000K, or 5000K
- Excellent 90 CRI light with uniform wide beam distribution
- Superior flicker free dimming down to 5%
- T24 JA8: Can be used to comply with California Energy Commission's high efficacy LED light source requirements

INPUT VOLTAGE: 120V, 60HZ

POWER FACTOR: >0.97, <10%

**DIMMABLE: PHASE CUT,
DOWN TO 5%**

EFFICACY: UP TO 82 LPW

CRI: 90

BEAM ANGLE: 110°

LIFETIME (L70): 50,000 HOURS

LOCATION RATING: WET

**AMBIENT OPERATING
TEMPERATURE: -4°F TO 113°F**



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED SURFACE MOUNT DOWNLIGHT

CCT SELECTABLE

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	LUMENS	WATTAGE	INPUT CURRENT	CCT	BEAM ANGLE	ENERGY STAR
SMD5/RND/11/CTS-46	70967	751338038912	910	11W	0.13A	2700K 3000K 3500K 4000K 5000K	110°	Y
SMD7/RND/17/CTS-46	70969	751338038929	1,400	17W	0.18A	2700K 3000K 3500K 4000K 5000K	110°	Y

NOMENCLATURE

Example: **SMD5/RND/11/CTS-46**


SMD5 = 5" Surface Mount Downlight / **RND** = Round / **11** = 11 Watts / **CTS** = Color Temperature Selectable
SMD7 = 7" Surface Mount Downlight / **17** = 17 Watts

ENERGY SAVINGS Based on 12 hours/day and \$0.11/kWh

MODEL #	LED WATTAGE	INCANDESCENT REPLACEMENT WATTAGE	WATTS SAVED	YEARLY SAVINGS	5 YEAR SAVINGS
SMD5/RND/11/CTS-46	11W	65W	54W	\$26.02	\$130.09
SMD7/RND/17/CTS-46	17W	85W	68W	\$32.76	\$163.81

DIMENSIONS | WEIGHT

MODEL #	A (IN)	B (IN)	C (IN)	WEIGHT (LBS.)
SMD5/RND/11/CTS-46	5.12"	1.26"	0.59"	0.64
SMD7/RND/17/CTS-46	7.09"	0.59"	0.59"	1.01

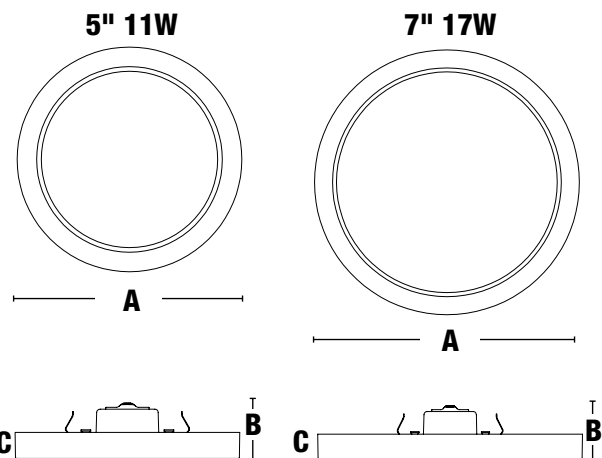

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**




LED SURFACE MOUNT DOWNLIGHT


CCT SELECTABLE

POLAR PLOTS

SMD5/RND/11/CTS-46

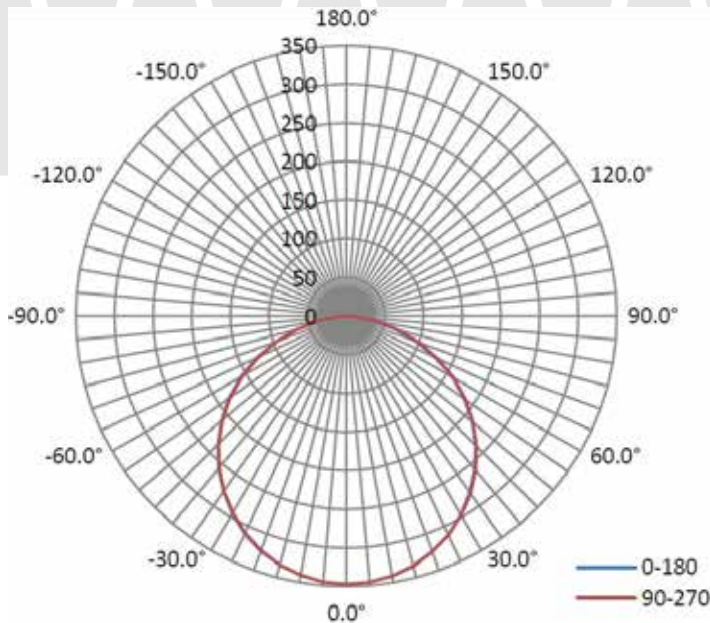

SMD5/RND/17/CTS-46

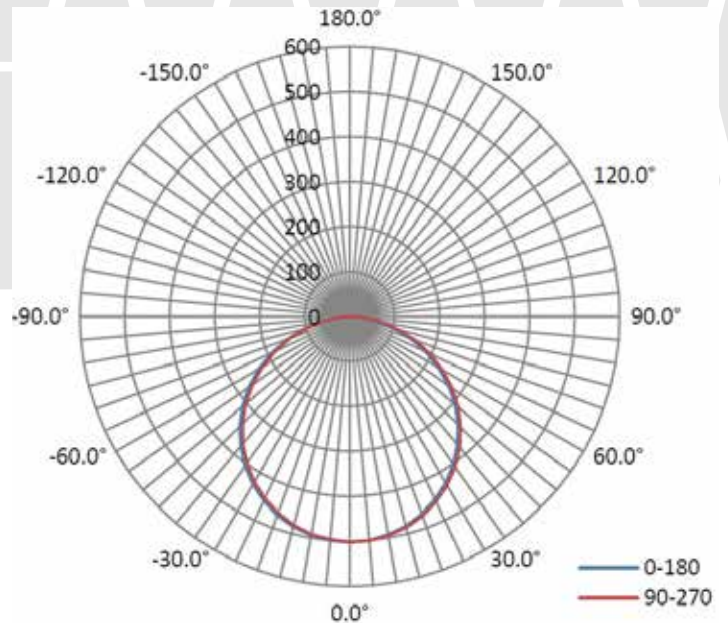

C

NOTES

¹Dimming- This product is designed to be compatible with most leading-edge type incandescent and LED style dimmers. (Dimming range 100% down to 10%). Product performance may vary depending on dimmer manufacturer and circuit loading.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Specifications are subject to change without prior notice. Replacement wattage shown depends on application and fixture.



Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.