



LED SURFACE MOUNT DOWNLIGHT

CCT SELECTABLE WITH MOTION SENSOR

SUGGESTED APPLICATIONS


- Commercial and residential
- Multi-family, hospitality, hallways, living rooms
- Surface mount installations in most 3-1/2" and 4" junction boxes
- Retrofit installations for 5/8" recessed can housings
- Suitable for use in clothes closets when installed in accordance with NFPA 70, NEC section 410.16 (A)(3) and 410.16 (C)(5)

FEATURES

- ENERGY STAR® Certified, highly energy efficient
- Sleek, ultra-thin profile surface mount downlight
- 5 CCT Selectable: 2700K, 3000K, 3500K, 4000K or 5000K
- Motion sensor switch settings:
 - Single level
 - Bi-level
 - Off/Motion sensor disabled
- Excellent 90 CRI light with uniform wide beam distribution
- Flicker free dimming down to 10%
- Torsion springs and E26 base adapter accessories included for retrofit mounting



Motion sensor and CCT selectable switches

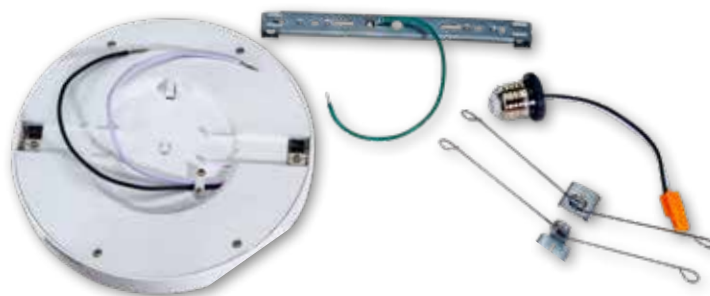

INPUT VOLTAGE: 120V

FREQUENCY: 60Hz

POWER FACTOR: >0.9, <30%

**DIMMABLE: LINE VOLTAGE
DOWN TO 10%¹**

EFFICACY: 88 LPW

CRI: 90

BEAM ANGLE: 110°

LIFETIME (L70): 50,000 HOURS

LOCATION RATING: DAMP

**AMBIENT OPERATING
TEMPERATURE: -13°F TO 104°F**

**CONSTRUCTION: ALUMINUM
HOUSING WITH WHITE,
BRONZE OR BRUSHED NICKEL
FINISH, SMOOTH FRAME AND
POLYCARBONATE LENS**



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED SURFACE MOUNT DOWNLIGHT

CCT SELECTABLE WITH MOTION SENSOR

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	LUMENS	WATTAGE	INPUT CURRENT	CCT	T24 JA8	ENERGY STAR
SMD7/RND/13/CTS/MS	71018	751338039049	1,150	13W	110mA	2700K 3000K 3500K 4000K 5000K	Y	Y

ORDERING GUIDE

Example: **SMD7/RND/13/CTS/MS**


PRODUCT	SIZE	SHAPE	WATTAGE	CCT	OPTIONS
SMD = SURFACE MOUNT DOWNLIGHT	7 = 7"	RND = ROUND	13 = 13 WATTS	CTS = COLOR TEMPERATURE SELECTABLE	MS = MOTION SENSOR

ENERGY SAVINGS *Based on 12 hours/day and \$0.11/kWh*

MODEL #	LED WATTAGE	INCANDESCENT REPLACEMENT WATTAGE	WATTS SAVED	YEARLY SAVINGS	5 YEAR SAVINGS
SMD7/RND/13/CTS/MS	13W	75W	62W	\$29	\$149

DIMENSIONS | WEIGHT

MODEL #	A (IN)	B (IN)	WEIGHT (LBS.)
SMD7/RND/13/CTS/MS	8.19	0.89	0.9

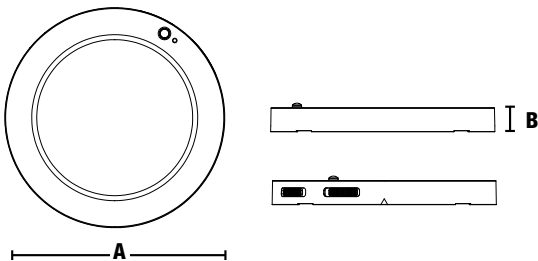

MOTION SENSOR SWITCH SETTINGS

SETTING	MOTION DETECTED	MOTION NOT DETECTED FOR 3 MINUTES
Single level	Full on*	Full off
Bi-level	Full on*	20% light output
Off/Disabled	Fixture controlled exclusively by the wall switch when motion sensor is disabled	

* Fixture will illuminate no greater than the level selected by a dimmer when dimming functionality is used

NOTES

[†]Dimming- This product is designed to be compatible with most leading-edge type incandescent and LED style dimmers. (Dimming range 100% down to 10%). Product performance may vary depending on dimmer manufacturer and circuit loading.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Specifications are subject to change without prior notice. Replacement wattage shown depends on application and fixture.



Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.